



MicroGuard MP®
Brand Page




MicroGuard MP®
Liquid Holdout
Demo Video

MicroGuard MP®

State-of-the-art lamination technology delivers a microporous garment with a superior particle and liquid splash barrier.

Seamless shoulder areas provide significantly more room to freely move the arms and shoulders without ripping or tearing. Elastic backing stretches for more comfort and tear-resistance while a gusseted, reinforced crotch provides more room to move, squat, or crouch in all directions without ripping or tearing.

Available Garments



Coverall with Attached Hood & Boots

#8019
Size: Small - 5XL
25 per case



Coverall with Attached Hood Only, Elastic Wrists & Ankles

#8015
Size: Small - 6XL
25 per case



Coverall with Elastic Wrists & Ankles

#8013
Size: Medium - 5XL
25 per case



Coverall with Elastic Wrists & Open Ankles

#8012
Size: Small - 5XL
25 per case



Lab Coat, No Pockets

#8046
Size: Medium - 4XL
30 per case



White Frock, No Pockets, Elastic Wrists

#8048
Size: Medium - 5XL
30 per case



Apron, 28" by 46"

#802448
Size: Universal
100 per case



Pants with Elastic Waist, No Pockets

#8200
Size: Medium - 4XL
50 per case



(800) 345-5972



5324 S. Peachtree Rd, #150
Balch Springs, TX 75180



int-enviroguard.com



Hood With Elastic Face, Shoulder Length

#8002
Size: Universal
100 per case



Sleeves, 18" Length, Elastic On Both Ends

#8065
Size: Universal
200 per case



Shoe Covers

#8101 Standard Sole
Size Large
400 per case

#8103 Non-Skid Sole
Size Large
200 per case

#8105 Non-Skid Sole
Size XL
200 per case



Boot Covers

#8102 Standard Sole
Size Large

#8104 Non-Skid Sole
Size Large
17.5" Tall with Ankle Ties

#8106 Non-Skid Sole
Size XL
18" Tall with Ankle Ties
All styles 200 per case

Physical Properties

TEST	METHOD	RESULT
Fabric Weight (oz/y ²)	ASTM D3776	1.6
Water Resistance (Kpa)	FZ/T 01004-1991	18.8
Flat Abrasion	FZ/T 01001-1991	198
Tear Strength (N/5cm)	ASTM D2261-1996	Sample cut horizontally, normal testing cannot be done. Woof: 8.6
Dry Particle Filtration Efficiency	ASTM F 2299	No Particle Penetration
Wet Particle Filtration Efficiency	ASTM F 2299	No Particle Penetration

Liquid & Chemical Testing

TEST	METHOD	RESULT
Bleach 5%	ASTM F903	Pass
Hydraulic Jack Oil	ASTM F903	Pass
Isocyanate Based Paint Hardener	ASTM F903	Pass
Motor Oil	ASTM F903	Pass
Sodium Hydroxide (10%)	ASTM F903	Pass
Mineral Oil	ASTM F903	Pass
Synthetic Blood	ASTM 1670-07	Pass


Vending Machine Packs "Vend Packs"



Coverall with Attached Hood Only, Elastic Wrists & Ankles

#8015VPK
Size: Medium - 6XL
25 per case
Individually Packaged
Vacuum-Sealed

Package Dimensions: 7.5" W x 10" H

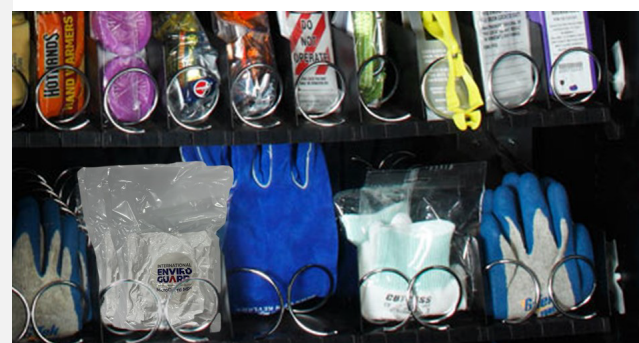

BS EN 1149-1:2006 Surface Resistivity

BS EN 1149-1:2006 Protective clothing. Electrostatic properties- Test method for measurement of surface resistivity.
Surface resistance= $1.2 \times 10^9 \Omega$

TEST	METHOD	RESULT
Air Permeability (cfm)	ASTM D737	<0.55
Burst Strength (lbs)	ASTM D3787	20
Tensile Strength (lbs) Machine Direction	ASTM D5034	23.2
Tensile Strength (lbs) Cross Direction	ASTM D5034	18.1
Tensile Strength (lbs) Trapezoidal - Machine Direction	ASTM D1117	9.76
Tensile Strength (lbs) Trapezoidal - Cross Direction	ASTM D1117	4.97

