

PRODUCT CATALOG



DUAL-TEXTURED SCRUBBING WIPES

for hands, tools, & surfaces



Anchor Brand Scrubbing Wipes use an industrial strength formula to remove the toughest grime without drying or irritating the skin. Tackle grease, oil, paint, tar, and adhesives with ease. These extra-strong wipes won't tear easily for maximum cleaning power.

- Extra large, durable wipes.
- Multi-purpose to use on hands, tools, & surfaces.
- No water needed.
- Contains no harsh chemicals.
- Leaves hands feeling clean & refreshed.

SKU	Quantity	Size
103-360726	72 Sheets per Canister	10 in x 12 in



2 WAYS TO FIGHT DIRT & GRIME

textured side for scrubbing & smooth side for wiping away

Resin Bonded Abrasives



Cutting Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast cut rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Tool Shape: T1

SKU	Dia.	Thickness	Arbor Size	Grit	Speed
903-1RC4578	4-1/2 in	0.045 in	7/8 in	60	13300 RPM
903-1RC678	6 in	0.045 in	7/8 in	60	10200 RPM
903-14321	14 in	3/32 in	1 in	36	4400 RPM
903-311638	3 in	1/16 in	3/8 in	36	25000 RPM
903-411638	4 in	1/16 in	3/8 in	36	19000 RPM



Depressed Center Cutting Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast cut rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Test & Approvals: ANSI B7.1, Latest Revision

Thickness: 0.045 in

Arbor Size: 7/8 in

Grit: 60

SKU	Tool Shape	Dia.	Speed
903-27RC578	T27	5 in	12,200 RPM
903-27RC457	T27	4-1/2 in	13,300 RPM



Depressed Center Grinding Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast grinding rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Thickness: 1/4 in

Grit: 24

SKU	Tool Shape	Dia.	Arbor Size	Speed
903-4121478	Type 28	4-1/2 in	7/8 in	13300 RPM
903-41247T	Depressed Center	4-1/2 in	5/8 in-11	13,300 RPM
903-547T	Depressed Center	5 in	5/8 in-11	12200 RPM
903-747T	T27	7 in	5/8 in-11	8,500 RPM



Depressed Center Combo Wheels

Features:

- Improved formulation increases life and performance by 30%.
- Delivers a fast grinding rate and consistent performance at a good value.
- Suitable for all steel and ferrous metals.

Thickness: 1/8 in

Grit: 30

SKU	Tool Shape	Dia.	Arbor Size	Speed
903-41287T	Type 29	4-1/2 in	5/8 in-11	13300 RPM
903-4121878	T27	4-1/2 in	7/8 in	13300 RPM
903-787T	T27	7 in	5/8 in-11	8500 RPM

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Flexible Depressed Center Wheels

Features:

- Aluminum oxide grain - effective for all steel and ferrous metals.
- Flexible for light stock removal, blending, finishing, and polishing.
- Consistent performance at competitive price.

Test & Approvals: ANSI B7.1, Latest Revision

Thickness: 1/8 in

SKU	Dia.	Arbor Size	Grit	Speed
903-45A27M	4-1/2 in	7/8 in	30	13,300 RPM
903-45A27MT	4-1/2 in	5/8 in-11	46	13,300 RPM
903-7A27M	7 in	5/8 in-11	46	8600 RPM



Cones and Plugs

Features:

- Aluminum oxide construction.
- General-purpose use.
- Use on mild steels, stainless steels, alloys, most metals and applications.

Thickness: 3 in

Grit: 24

SKU	Tool Shape	Dia.	Arbor Size	Speed
903-C1620305	Type 16	2 in	5/8 in-11	18047 RPM
903-C1610303	T16	1 in	3/8 in-24	36,094 RPM
903-C18R15303	T18R	1-1/2 in	3/8 in-24	24,063 RPM

Bonded Abrasive Parts & Accessories



General Purpose Back-up Pads

Features:

- Designed for use with various attachment systems in tools and home improvement projects.
- Enhances the performance of grinding and sanding tools by providing a stable and smooth surface.
- Compatible with standard tools.
- Durable material ensures longevity.
- Easy to install and remove.

SKU	Thread - TPI or Pitch	Arbor Diam.	Hardness Grade	Speed	Dia.
102-BP-700	5/8 in - 11	7/8 in	Firm	8500 RPM	7 in
102-BP-450	5/8 in - 11	5/8 in	Medium	12000 RPM	4-1/2 in
102-BP-700M	5/8 in - 11	5/8 in - 11	Medium	8500 RPM	7 in



Heavy Duty Back-up Pads

Features:

- Made from proprietary thermoplastic.
- Ideal for heavy duty coarse grinding.
- Premium quality product with durable construction.

Hardness Grade: Coarse

Speed: 12000 RPM

Dia.: 4-1/2 in

SKU	Thread - TPI or Pitch	Arbor Diam.
102-PP4250	5/8 in - 11	5/8 in

Coated Disc Abrasives



Resin Fiber Discs

Features:

- Ideal for blending, finishing and surface preparation.
- Rigid yet flexible backing for the most demanding applications.
- Electrostatically distributed grains for the most consistent grain application.

Mounting: Arbor Hole

SKU	Dia.	Arbor Diam.	Grit	Speed	Abrasive Material
102-45A60	4-1/2 in	5/8 in	60	12,000 RPM	Aluminum Oxide
102-45A36	4-1/2 in	7/8 in	36	11,000 RPM	Aluminum Oxide
102-45A80	4-1/2 in	7/8 in	80	11,000 RPM	Aluminum Oxide
102-5A24	5 in	7/8 in	24	10,000 RPM	Aluminum Oxide
102-5Z36	5 in	7/8 in	36	11,900 RPM	Zirconia Alumina
102-5A36	5 in	7/8 in	36	10,000 RPM	Aluminum Oxide
102-5Z50	5 in	7/8 in	50	11,900 RPM	Zirconia Alumina
102-5A60	5 in	7/8 in	60	10,000 RPM	Aluminum Oxide
102-7A60	7 in	7/8 in	60	8,500 RPM	Aluminum Oxide
102-7A24	7 in	7/8 in	24	8,500 RPM	Aluminum Oxide
102-7A36	7 in	7/8 in	36	8,500 RPM	Aluminum Oxide

Coated Flap Disc Abrasives



Abrasive Flap Discs

Features:

- Designed for versatility in cutting and grinding.
- Ideal for metal and wood surface preparation.
- Phenolic backing.

SKU	Dia.	Grit	Arbor Diameter	Speed	Tool Shape
102-41344	4-1/2 in	40	7/8 in	13,000 RPM	Type 29
102-41350	4-1/2 in	40	5/8 in to 11	13,000 RPM	Type 29
102-40374	4-1/2 in	60	7/8 in	12,000 RPM	Type 27
102-41345	4-1/2 in	60	7/8 in	13,000 RPM	Type 29
102-41351	4-1/2 in	60	5/8 in to 11	13,000 RPM	Type 29
102-41409	4-1/2 in	60	5/8 in	13,000 RPM	Type 27
102-41403	4-1/2 in	60	7/8 in	13,000 RPM	Type 27
102-41346	4-1/2 in	80	7/8 in	13,000 RPM	Type 29



Abrasive High Density Flap Discs

Features:

- A thicker disc with larger flaps for increased conformability.
- High cut rate and smooth grinding action.
- Ideal for a working angle less than 15°.
- Offers durability and reinforcement.
- Phenolic backing prevents disc from scratching the workpiece.
- Produces a consistent finish.

Abrasive Material: Zirconia Alumina

Dia.: 4-1/2 in

SKU	Grit	Arbor Diameter	Speed	Tool Shape
102-40379	80	5/8 in	12000 RPM	Type 27
102-40373	40	7/8 in	12000 RPM	Type 27
102-40375	80	7/8 in	12,000 RPM	Type 27
102-40376	120	7/8 in	13300 RPM	Type 27
102-40377	40	5/8 in - 11	12000 RPM	Type 27
102-40378	60	5/8 in - 11	12000 RPM	Type 27

Cup Brushes



Crimped Cup Brushes

Features:

- For light to medium duty general purpose cleaning of large surfaces.
- Flexible brushing action for irregular surfaces.
- Effective for removing rust and corrosion.

Arbor Size: 5/8 in-11

SKU	Wire Material	Dia.	Wire Size	Trim Length
102-3CC58S	Stainless Steel	3 in	0.012 in	7/8 in
102-3CC58	Carbon Steel	3 in	0.012 in	7/8 in
102-R3CC58	Carbon Steel	3 in	0.014 in	7/8 in
102-4CC58	Carbon Steel	4 in	0.014 in	1-1/4 in
102-6C20	Carbon Steel	6 in	0.02 in	1 1/4 in
102-6CC58	Carbon Steel	6 in	0.014 in	11/4 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Heavy-Duty Knot-Style Cup Brushes

Features:

- Heavy-duty cup brush is the perfect tool for fast cleaning action over a large surface area.
- Highly effective for accessing corners and hard-to-reach places.
- Sturdy and long-lasting brush.

Wire Size: 0.025 in

Trim Length: 1 1/4 in

Arbor Size: 5/8 in - 1 1/2 in

SKU	Wire Material	Dia.
102-BW-441-BULK	Carbon Steel	4 in



Knot Cup Brushes

Features:

- Provides flexible brushing action and cost-effective performance in general purpose cleaning applications.
- Quickly completes rough surface-prep and debris-removal tasks.
- Features a threaded nut, making for smooth, efficient operation on angle grinders.

Arbor Size: 5/8 in - 1 1/2 in

SKU	Wire Material	Dia.	Wire Size	Trim Length	Arbor Size
102-93992	Carbon Steel	3-1/2 in	0.02 in	7/8 in	5/8 in-1 1/2 in
102-3KC14	Carbon Steel	2-3/4 in	0.014 in	7/8 in	5/8 in to 1 1/2 in
102-3KC58	Carbon Steel	3 in	0.02 in	1 in	5/8 in - 1 1/2 in
102-3KC58S	Stainless Steel	3 in	0.02 in	1-1/4 in	5/8 in - 1 1/2 in
102-4KC14	Carbon Steel	4 in	0.014 in	1-1/4 in	5/8 in - 1 1/2 in
102-4KC58	Carbon Steel	4 in	0.02 in	1-1/4 in	5/8 in - 1 1/2 in
102-4KC58S	Stainless Steel	4 in	0.02 in	1-1/4 in	5/8 in - 1 1/2 in
102-6KC25	Carbon Steel	6 in	0.025 in	1-3/8 in	5/8 in - 1 1/2 in
102-6KC58	Carbon Steel	6 in	0.014 in	1-3/8 in	5/8 in - 1 1/2 in
102-R3KC14S	Stainless Steel	3 in	0.014 in	5/8 in	5/8 in - 1 1/2 in
102-R3KC58	Carbon Steel	3 in	0.012 in	7/8 in	5/8 in - 1 1/2 in
102-R3KC58S	Stainless Steel	3 in	0.012 in	7/8 in	5/8 in - 1 1/2 in

End Brushes



Crimped Wire End Brushes

Features:

- Features solid end construction.
- Very flexible brushing action.
- Ideal for more demanding light-duty cleaning applications in corners and hard-to-reach areas.

Speed: 22,000 rpm

Stem Diam: 1/4 in

Brush Diam.: 1 in

SKU	Wire Size	Trim Length
102-90915	0.006 in	7/8 in
102-1EB4010	0.01 in	1 in



Knot Wire End Brushes

Features:

- Rugged knot-style construction provides aggressive, high-impact action.
- Features hollow end and heavy-duty brushing action with some flexibility.
- Ideal for more demanding cleaning applications in recessed areas.

Trim Length: 7/8 in

Speed: 22,000 rpm

Stem Diam: 1/4 in

SKU	Brush Diam	Wire Size
102-BW-208	3/4 in	0.020 in
102-1EB14	1 1/8 in	0.014 in
102-1EB20	1-1/8 in	0.02 in
102-1EB20POP	1 1/8 in	0.02 in
102-1EB20SS	1 1/8 in	0.02 in
102-34EB20POP	3/4 in	0.02 in
102-90878	1 in	0.014 in



Stem Mounted Knot Wire End Brushes

Features:

- For tough use.
- Densely filled.
- Long life.

Trim Length: 7/8 in

Speed: 22,000 rpm

Stem Diam: 1/4 in

SKU	Brush Diam	Wire Size
102-BW-207	3/4 in	0.014 in

Wheel Brushes



Stringer Bead Wheel Brushes

Features:

- Very narrow face design primarily for weld cleaning and to access hard-to-reach areas.

Arbor Thread: 5/8 in - 11

SKU	Bristle Material	Bristle Diam	Dia.	No. of Knots	Face Width
102-BW-760	Steel	0.023 in	6 in	24	1/2 in
102-BW-862	Stainless Steel	0.02 in	6 in	48	3/6 in
102-BW-855	Steel	0.02 in	5 in	38	3/16 in
102-4S58	Carbon Steel	0.02 in	4 in	30	4 in
102-4S58S	Stainless Steel	0.02 in	4 in	30	1/4 in
102-6S58	Carbon Steel	0.02 in	6 in	48	6 in
102-6S58S	Stainless Steel	0.02 in	6 in	48	6 in
102-7S58	Carbon Steel	0.02 in	7 in	56	3/6 in
102-7S58S	Stainless Steel	0.02 in	7 in	56	3/6 in
102-R4S58	Carbon Steel	0.02 in	4 in	30	4 in
102-R4S58S	Stainless Steel	0.02 in	4 in	30	4 in
102-R6S58	Carbon Steel	0.02 in	6 in	48	3/6 in



Knot Wheel Brushes

Features:

- Heavy-duty brushing action with some flexibility.
- Ideal for demanding cleaning applications on somewhat irregular surfaces.
- Use for general-purpose applications.

No. of Knots: 20

SKU	Bristle Material	Bristle Diam	Dia.	Arbor Diam	Face Width	Arbor Thread
102-3STK14	Carbon Steel	0.014 in	3 in	1/2 - 3/8 in	3/8 in	1/2 - 3/8 in
102-4K58	Carbon Steel	0.014 in	4 in	5/8 in - 11	5/8 in	5/8 in - 11
102-R4K58	Carbon Steel	0.014 in	4 in	5/8 in - 11	4 in	5/8 in - 11
102-4K58S	Stainless Steel	0.014 in	4 in	5/8 in - 11	5/8 in	5/8 in - 11
102-R4K58S	Stainless Steel	0.02 in	4 in	5/8 in - 11	1/2 in	5/8 in - 11



Crimped Wheel Brushes

Features:

- Provides very flexible brushing action.
- For light cleaning and deburring.

Stem Diam: 1/4 in

Arbor Diam: 1/4 in

SKU	Bristle Material	Bristle Diam	Dia.	Face Width	Arbor Thread
102-CFX-2	Carbon Steel	0.0118 in	2 in	3/8 in	1/4 in
102-BW-9220	Stainless Steel	0.014 in	3 in	5/8 in	1/4 in
102-CFX-3118	Carbon Steel	0.0118 in	3 in	3 in	1/4 in
102-CFX-3POP	Carbon Steel	0.014 in	3 in	1/2 in	1/4 in
102-93763	Stainless Steel	0.014 in	3 in	1/2 in	5/8 in to 12

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Light Duty Crimped Wheel Brushes

Features:

- Flexible brushing and consistent performance for demanding light duty cleaning and deburring applications.
- Good for a broad range of general purpose applications.

Face Width: 1/2 in

Bristle Material: Carbon Steel

Bristle Diam: 0.014 in

SKU	Dia.	Arbor Thread
102-BW-450	4 in	5/8 in-11 UNC
102-BW-605	6 in	5/8 - 1/2 in



Narrow Face String Bead Wheel Brushes

Features:

- Very narrow face.
- For hard-to-reach areas, primarily for weld cleaning.
- High impact action for cleaning welds.

Dia.: 4 in

Arbor Diam: 3/8 in - 24

No. of Knots: 30

Face Width: 3/16 in

Arbor Thread: 3/8 in - 24

SKU	Bristle Material	Bristle Diam
102-BW-845	Carbon Steel	0.02 in



Standard Twist Knot Wheels

Features:

- Aggressive brushing action for general-purpose deburring, cleaning, and surface preparation applications.
- Weld preparation and cleaning, removing rust, scale and oxidation.

Dia.: 6 in

No. of Knots: 24

Face Width: 1/2 in

Bristle Diam: 0.023 in

Arbor Diam: 5/8 - 11

Arbor Thread: 5/8 - 11

SKU	Bristle Material
102-6T58	Carbon Steel
102-6T58S	Stainless Steel



Stainless Steel & Aluminum Cleaning String Bead Wheel Brushes

Features:

- Very narrow face.
- For hard-to-reach areas, primarily for weld cleaning.
- For stainless steel and aluminum brushing applications.

Dia.: 4 in


No. of Knots: 30

Face Width: 3/16 in

Arbor Thread: 3/8 in - 24

SKU	Bristle Material	Bristle Diam
102-BW-9845	Stainless Steel	0.02 in

Scratch Brushes



Chipping Hammer Brushes

Features:

- High quality brush to be used in conjunction with dual tooled chipping hammers.
- Used for weld cleaning of steel parts.
- Short trim for added aggression.

Block Material: Wood

Block Width: 7/8 in

Overall Length: 4-5/8 in

Handle Material: Wood

SKU	Handle Type	Brush Length	Trim Length	Bristle Rows
102-A-19	Straight	4-1/2 in	1-1/8 in	3 X 15
102-BW-189	Bent	7-1/2 in	1/2 in	3 x 7



Hand Scratch Brushes

Features:

- Heavy-duty industrial brushes.
- Wire fill and length is unsurpassed.
- Durable wood handle.

Block Material: Wood

Handle Material: Wood

SKU	Handle Type	Bristle Material	Bristle Rows
102-BW-112	Shoe	Steel	4 X 16
102-385	Curved	Carbon Steel	4 X 18
102-BW-9104	Curved	Stainless Steel	4 X 18
102-BW-9103	Curved	Stainless Steel	3 X 19
102-BW-104	Curved	Steel	4 X 18
102-BW-103	Curved	Carbon Steel	3 X 19
102-BW-9112	Shoe	Stainless Steel Fill	4 X 16
102-387	Shoe	Carbon Steel	4 X 16
102-387SS	Shoe	Stainless Steel	4 X 16
102-388	Curved	Carbon Steel	3 X 19
102-388SS	Curved	Stainless Steel	3 X 19



Inspection Brushes

Features:

- Ideal for cleaning and prepping surfaces.
- Great for small cleaning jobs.
- Made with stainless steel bristles for durability.

SKU	Handle Type	Handle & Block Material	Bristle Material	Block Width	Bristle Rows
102-BW-195	Bent	Wood	Stainless Steel	1/2 in	2 x 9
102-BW-195C	Bent	Wood	Stainless Steel	1/2 in	2 x 9
102-BW-190	Bent	Wood	Stainless Steel	1/2 in	3 X 7
102-BW-205	Bent	Wood	Brass	1/2 in	3 x 7
102-BW-192	Straight	Plastic	Stainless Steel	1/2 in	3 X 7
102-BW-190C	Bent	Wood	Stainless Steel	7/8 in	3 x 7



Utility Brushes

Features:

- Abrasive metal brush removes corrosion, oxidation.
- Narrow bristle configuration is ideal for cleaning tight spaces.
- Rust-resistant.

Block Width: 1/2 in

Bristle Rows: 3 X 7

Handle Type: Curved

SKU	Handle Material	Bristle Material	Block Material
102-15B	Wood	Brass	Wood
102-15SS	Wood	Stainless Steel	Wood
102-30SS	Wood	Stainless Steel	Wood
102-37SS	Plastic	Stainless Steel	Plastic

Cable Ties



General Purpose Cable Ties

Features:

- Nylon 6/6 features light weight, high strength and a wide temperature range.
- Even at higher than recommended temperatures or exposure to flame, nylon does not give off toxic or irritating by-products.

Material: Nylon 6/6

SKU	Length	Width	Thickness	Tensile Strength	Bundle Diam
Color: Natural					
102-1150N	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-12120N	12 in	0.298 in	0.069 in	120 lb	3 in
102-1450N	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-15120N	15 in	0.298 in	0.069 in	120 lb	4 in
102-24175N	24.5 in	0.350 in	0.087 in	175 lb	7.2 in
102-36175N	36 in	0.350 in	0.087 in	175 lb	11 in
102-418N	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
102-530N	5.7 in	0.142 in	0.054 in	40 lb	1.25 in
102-750N	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-750N-B	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-9120N	9 in	0.298 in	0.069 in	120 lb	2 in
102-1150N-B	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-818N	8.1 in	0.096 in	0.045 in	18 lb	2 in
102-818N-B	8.1 in	0.096 in	0.045 in	18 lb	2 in
102-530N-B	5.7 in	0.142 in	0.054 in	30 lb	1.25 in
Color: Yellow					
102-1450YEL	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-750YEL	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-1150YEL	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-418YEL	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
Color: Red					
102-418RED	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
102-1150RED-B	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-750RED	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-1150RED	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1450RED	14.6 in	0.18 in	0.054 in	50 lb	4 in
Color: Blue					
102-418BLU	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
102-1150BLU	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1450BLU	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-750BLU	7.6 in	0.18 in	0.054 in	50 lb	2 in
Color: Green					
102-1150GRN	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1450GRN	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-750GRN	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-418GRN	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
Color: Orange					
102-530ORG	5.7 in	0.142 in	0.054 in	40 lb	1.25 in
102-418ORG	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
102-750ORG	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-1150ORG	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1450ORG	14.6 in	0.18 in	0.054 in	50 lb	4 in
Color: Purple					
102-1450PURP	14.6 in	0.18 in	0.054 in	50 lb	4 in
Color: Brown					
102-1150BRN	11.1 in	0.18 in	0.054 in	50 lb	3 in



UV Stabilized Cable Ties

Features:

- General purpose use.
- Nylon 6/6 features light weight, high strength and a wide temperature range.
- Contains increased resistance to UV light (does not totally eliminate the destructive effects of the light).

Material: Nylon 6/6

SKU	Length	Width	Thickness	Tensile Strength	Bundle Diam
102-1150UVB	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1150UVB-B	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-12120UVB	12 in	0.298 in	0.069 in	120 lb	3 in
102-1450UVB	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-1450UVB-B	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-15120UVB	15 in	0.298 in	0.069 in	120 lb	4 in
102-24175UVB	24.5 in	0.350 in	0.087 in	175 lb	7.2 in
102-36175UVB	36 in	0.350 in	0.087 in	175 lb	11 in
102-418UVB	4.1 in	0.096 in	0.035 in	18 lb	0.75 in
102-48175UVB	48 in	0.350 in	0.087 in	175 lb	15 in
102-530UVB	5.7 in	0.142 in	0.05 in	40 lb	1.25 in
102-750UVB	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-750UVB-B	7.6 in	0.18 in	0.054 in	50 lb	2 in
102-9120UVB	9 in	0.298 in	0.069 in	120 lb	2 in



Metal Detectable Cable Ties

Features:

- Impregnated with metal flakes for contamination prevention.
- Teal blue color for easy identification.

Color: Teal

Material: Nylon 6/6; Metal

SKU	Length	Width	Thickness	Tensile Strength
102-840MD	8.9 in	0.142 in	0.054 in	40 lb
102-1450MD	14.6 in	0.18 in	0.054 in	50 lb
102-15120MD	15 in	0.298 in	0.069 in	120 lb
102-1150MD	11.1 in	0.18 in	0.054 in	50 lb
102-418MD	4.1 in	0.096 in	0.035 in	18 lb
102-750MD-B	7.6 in	0.18 in	0.054 in	50 lb
102-750MD	7.6 in	0.18 in	0.054 in	50 lb



Elite Cold Weather Cable Ties

Features:

- Superior performance in sub-zero temperatures.
- All-weather applications.
- UV resistant.

Color: Black

Material: Nylon 6/6

SKU	Length	Width	Thickness	Tensile Strength	Bundle Diam
102-15120AW	15 in	0.298 in	0.069 in	120 lb	4 in
102-1150AW	11.1 in	0.18 in	0.054 in	50 lb	3 in
102-1450AW	14.6 in	0.18 in	0.054 in	50 lb	4 in
102-750AW	7.6 in	0.18 in	0.054 in	50 lb	2 in



Releasable Cable Ties

Features:

- Fast and easy removal.
- Temporary or permanent applications.
- Simply pull the release tab in the direction of the arrow to release, and the tie is ready to reuse.

Thickness: 0.055 in


Tensile Strength: 50 lb

Bundle Diam: 4 in

Material: Nylon 6/6

SKU	Length	Width
102-B14SOC-R	14.6 in	0.180 in

Pipe Sealant Tapes



Gas Line PTFE Thread Sealant Tapes

Features:

- Heavy-duty, full-density tape that permits quick, clean and economical sealing of threaded pipe connections.
- Full density makes it ideal for gas lines and other applications requiring the best possible seal.
- Made of 99.5% virgin PTFE with a pigment additive for coloring.

Thickness: 0.0035 in

Color: Yellow

SKU	Length	Width
102-1/2X260PTFE-YEL	260 in	1/2 in
102-1/2X520PTFE-YEL	520 in	1/2 in
102-3/4X520PTFE-YEL	520 in	3/4 in



White PTFE Thread Sealant Tapes


Features:

- Easy installation, several wraps around the male threads and you're done.
- Made of 100% PTFE; compatible with almost any process fluid (except molten alkalis and elemental fluorine).

SKU	Length	Width	Thickness
102-1/2X1296PTFE	1296 in	1/2 in	0.0035 in
102-1/2X260PTFE	260 in	1/2 in	0.0035 in
102-1/2X520PTFE	520 in	1/2 in	0.0035 in
102-1/2X600-PTFE	600 in	1/2 in	0.0035 in
102-1/2X610PTFE	610 in	1/2 in	0.0035 in
102-1/4X1296PTFE	1296 in	1/4 in	0.0035 in
102-1/4X260PTFE	260 in	1/4 in	0.0035 in
102-1/4X300-PTFE	300 in	1/4 in	0.0035 in
102-1/4X520PTFE	520 in	1/4 in	0.0035 in
102-1/4X600-PTFE	600 in	1/4 in	0.0035 in
102-1X1296PTFE	1296 in	1 in	0.0035 in
102-1X260PTFE	260 in	1 in	0.0035 in
102-1X300-PTFE	300 in	1 in	0.0035 in
102-1X520PTFE	520 in	1 in	0.0035 in
102-3/4X1296PTFE	1296 in	3/4 in	0.0035 in
102-3/4X260PTFE	260 in	3/4 in	0.0035 in
102-3/4X520PTFE	520 in	3/4 in	0.0035 in
102-3/4X600-PTFE	600 in	3/4 in	0.0035 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

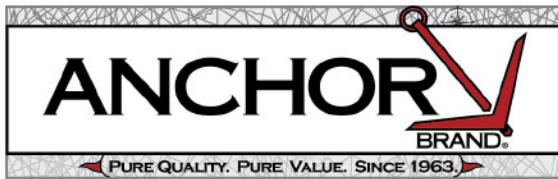

General purpose use UV Stabilized Cable Ties



Premium Material

Made of Nylon 6/6 making them light weight high strength. UV Resistant, and able to be used in a wide range of temperatures.



Self-Locking Design

The self-locking design lets the tie be securely locked in place without the use of other tools.



Non-Slip Side

The grooved side of the tie helps catch the locking head to make sure the tie is firmly latched in place.

SKU	Length	Tensile Strength
102-418UVB	4.1 in	18 lb
102-530UVB	5.7 in	40 lb
102-750UVB	7.6 in	50 lb
102-750UVB-B	7.6 in	50 lb
102-9120UVB	9 in	120 lb
102-1150UVB	11.1 in	50 lb
102-1150UVB-B	11.1 in	50 lb
102-12120UVB	12 in	120 lb
102-1450UVB	14.6 in	50 lb
102-1450UVB-B	14.6 in	50 lb
102-15120UVB	15 in	120 lb
102-24175UVB	24.5 in	175 lb
102-36175UVB	36 in	175 lb
102-48175UVB	48 in	175 lb





QUALITY WELDING TOOLS AND EQUIPMENT

GALVANIZING PRIMERS

- Reduced M.I.G weld spattering
- Prevents rust and corrosion
- Protects welded surfaces
- Repairs Hot Dip Galvanizing with brighter finish
- Will not blister or burn away.



SKU	Capacity	Chemical Compound	Packaging Type
905-RW109B-12	12.75 oz	5 oz	Aerosol Can

ANTI-SPATTER

- Prevents spatter adhesion
- Non-messy formula, washes off easily
- Environmentally friendly



SKU	Capacity	Chemical Compound	Packaging Type
905-NOZZLE-DIP	16 oz	Petroleum Jelly	Jar
905-630-160Z	16 oz	Water-Based	Aerosol Can
905-630-1GL	1 gal	Water-based	Jug

LUBRICATION PADS

- Eliminates erratic wire feed caused by dust particles of flashing being trapped inside conduit lines
- Contains no solvents, abrasives, carbon, sulfur, nitrogen, moly disulphide or silicon
- Non-flammable, non-toxic.



SKU	Type	Quantity	Packaging Type
905-LUBE-PAD-6PK-PLAIN	Plain Wire Lube Pads	6 Pads per Pack	Pack
905-LUBE-PAD-6PK-TREATED	Treated Wire Lube Pads	6 Pads per Pack	Pack
905-LUBE-PAD-COMBO	Plain and Treated Wire Lube Pads	2 Pads per Pack	Pack

Clamps & Spreaders



Drop Forged C-Clamps

Features:

- Extra throat depth.
- Non-slip clamping on all shapes.
- Steel spindles are copper plated for spatter protection.
- Swivel pads adjust freely to bear evenly on clamped part.
- Individually boxed for easy storage and protection.

Body Material: Drop Forged Steel

Handle Type: Sliding Pin

Handle Material: Steel

SKU	Opening Size	Overall Length	Throat Depth	Pressure	Spindle Dia
102-402C	2-1/8 in	2 in	2-1/4 in	3,500 lb	9/16 in
102-404C	3-1/4 in	4 in	3-1/4 in	6,200 lb	3/4 in
102-406C	6-1/16 in	6 in	4-7/8 in	6,900 lb	3/4 in
102-408C	8-1/4 in	8 in	5 in	6,600 lb	3/4 in
102-410C	12-1/4 in	10 in	6 in	8,000 lb	3/4 in
102-412C	12-1/4 in	12 in	6-5/16 in	9,300 lb	7/8 in



Locking C-Clamps


Features:

- Easy to lock.
- Easy to release.

Throat Depth: 2.625 in

Body Material: Alloy Steel

SKU	Opening Size	Overall Length
100-AB-11RI	3-3/4 in	11 in



Clamp Fixtures

Features:

- Coil-spring "stop"--one is included with each clamp fixture.
- Mounts on any length 3/4 in black pipe with both ends threaded (pipe not furnished).
- Hardened Clutch disc for less bleed.

Jaw Material: Cast Iron

Body Material: Steel

SKU	Jaw Width	Spindle Diam	Handle Type
103-50	1-3/4 in	5/8 in	Crank Handle
103-56	2-1/2 in	5/8 in	Wing-Nut

Crimpers & Strippers



Heavy Duty Lug Crimping Tools


Features:

- Heavy-duty steel body with double slide support for rigidity.
- Durable spring-loaded mechanism holds terminal/lug in place.
- Easy-to-read scale on both sides of drive punch.
- Wide base for stability.

Handle Material: Steel

SKU	Capacities	Cable/Wire Size
900-CM-20	#6 to 4/0 AWG	6 AWG - 4/0 AWG

Half Round Files

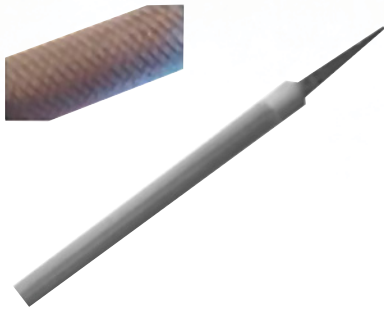

Bastard Files

Features:


- Manufactured from the finest materials and properly heat treated to produce outstanding quality.
- Versatile applications for concave, convex or flush surfaces.
- Double-cut flat side.
- Handy for filing down sharp edges.

Tooth Pattern: Flat - Double Cut

Quantity: 50 per case

SKU	Length
100-14HRBF	14 in

Hammers



Chipping Hammers

Features:

- Hammer heads are hardened to precisely controlled temperatures for durability and strength.
- Wide-blade design removes slag faster and adds to the life of the tool.
- Drop forged, heat-treated, hardened head withstands more grinds.
- Well balanced handle grip for comfort and ease-of-use.

Head Material: Forged Steel

SKU	Overall Length	Handle Type	Handle Material	Color
900-7002	265 mm	Straight	Polypropylene Grip	Zinc Plated; Orange
900-CH-200	279 mm	Spring	Steel	Black
900-000A	280 mm	Spring	Steel	Black
900-000H	280 mm	Spring	Steel	Black
900-WH-30	315 mm	Straight	Wood	Black; Natural
900-WH-20	315 mm	Straight	Wood	Black; Natural

Handsaws



High Tension Hacksaws

Features:

- Die cast aluminum handle.
- Cuts 90 and 40 degree angles.
- Bi-metal blade included.

Throat Depth: 4-3/4 in

Handle Material: Die Cast Aluminum

SKU	Blade Length	Teeth Per Inch
103-34-340	12 in	24

Hex Key Sets



Hex Key Sets with Holders

Features:

- Hex key set with commonly used sizes.
- Features solid steel construction and a holder for organization.

SKU	Tip Size
103-50-013	0.050 in; 1/16 in; 5/64 in; 3/32 in; 7/64 in; 1/8 in; 9/64 in; 3/16 in; 7/32 in; 1/4 in; 5/16 in; 3/8 in; 0.050 in [Min]; 3/8 in [Max]
103-50-022	0.050 in; 1/16 in; 5/64 in; 3/32 in; 7/64 in; 1/8 in; 9/64 in; 5/32 in; 3/16 in; 7/32 in; 1/4 in; 3/8 in; 1.500 mm; 2 mm; 2.500 mm; 3 mm; 4 mm; 5 mm; 6 mm; 8 mm; 10 mm; 0.050 in [Min]; 1.500 mm [Min]; 3/8 in [Max]; 10 mm [Max]

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Knife Blades



Blade Dispenser Containers

Features:

- Dispenses one blade at a time.
- Fits AB-99 and AB-2600.
- Fits most utility knives.

No. of Cutting Edges: 1

Quantity: 100 per dispenser

Wt.: 0 lb

SKU	Blade Shape	Blade Tip Shape
102-AB-11-100	Trapezoid	Straight Edge

Scrapers & Putty Knives



Ship Scrapers

Features:

- Black oxide coating for rust resistance.
- Drop forged for strength.
- Ground and hardened tip.

Material: High-Carbon Steel

Blade Type: Double-End Bent Ship Scraper

SKU	Blade Width	Overall Length
103-393	1-3/4 in	15 in

Knives



Retractable Blade Utility Knives

Features:

- Features a multi-stop button and retractable blade to help minimize injuries in the workplace.
- Used with Anchor Brand replacement blades AB-11-100.

Blade Length: 1 in

Blade Material: Steel

Handle Material: Zinc Alloy

SKU	Handle Length	Overall Length
102-AB-99	6 in	7 in



Auto Load Utility Knife

Features:

- Retractable blade.
- Auto load feature.
- Stores 10 blades in body.
- Replacement blades AB-11-100.

Blade Length: 1 in

Blade Material: Steel

Handle Material: Metal

SKU	Handle Length	Overall Length
102-AB-2600	6 in	7 in

Bolt & Chain Cutters



Bolt Cutters

Features:

- Slip resistant handles.
- Internal cam mechanism provides greater torque.
- Hardened steel jaw and blades for a clean cut.

Cut Type: Center Cut

Jaw Material: Forged Alloy Steel

Handle Material: Rubber; Steel

Hardness: 42 HRC

SKU	Cutting Cap.	Overall Length
103-39-014	3/16 in	14 in
103-39-018	5/16 in	18 in
103-39-024	3/8 in	24 in
103-39-036	7/16 in	36 in

Diagonal Pliers



Anchor Brand Diagonal Cutting Pliers

Features:

- Hardened and tempered.
- Comfort grip handle.
- Precision ground cutter.

Jaw Length: 0.8 in

Cutting Length: 0.6 in

Material: Drop Forged Steel

Finish: Polished

SKU	Overall Length
103-10-406	6 in
103-10-407	7 in

Slip Joint Pliers



Slip Joint Pliers

Features:

- Hardened and tempered.
- Non-slip molded grips.
- Precision machined jaws.

No. of Adj.: 2

Material: Drop Forged Steel

SKU	Overall Length	Jaw Length
103-10-006	6-1/2 in	1-1/4 in
103-10-008	8 in	1-1/2 in
103-10-010	10 in	2 in

Linemans Pliers



Solid Joint Lineman's Pliers

Features:

- Hardened and tempered.
- Comfort grip handles.
- Precision ground cutters.

Material: Drop Forged Steel

SKU	Overall Length
103-10-308	8 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Needle Nose Pliers



Solid Joint Long Nose Pliers

Features:

- Hardened and tempered.
- Comfort grip handle and broached jaws.

Finish: Fully Polished

Material: Drop Forged Steel

SKU	Jaw Length	Jaw Thickness	Overall Length	Cutting Length	Point Thickness
103-10-206	2 in	5/16 in	6 in	0.6 in	1/8 in
103-10-208	2-3/4 in	3/4 in	8 in	0.8 in	27/64 in

Tongue & Groove Pliers



Tongue & Groove Joint Pliers

Features:

- Hardened and tempered.
- Comfort grip handle.
- Easy adjustments.

Jaw Length: 1-3/8 in

No. of Adjustments: 5

SKU	Overall Length	Jaw Opening
103-10-110	10 in	2 in

Specialty Pliers



MIG Welding Pliers

Features:

- Strong, sharp welding pliers is a must tool for mig welding operations.
- Multipurpose tool with 8 functions resulting in more efficient time and production.
- Durable carbon steel construction paired with an easy to use spring operated handle.

Jaw Shape: Double-Edged

Material: Carbon Steel

Overall Length: 21 cm

SKU	Wire Diam	Color
900-BW-50	0.8 mm - 1.5 mm	Black
900-YS-50	0.8 mm - 1.5 mm	Blue

Tool Pouches & Holders



Leather Holsters

Features:


- Genuine leather holster, keeps pliers safe and handy.
- Protects pliers tips.
- Prevents wear and tear.

Width: 3-1/2 in

Height: 10-1/2 in

SKU	Material
900-BW-50-HOLSTER	Leather

Bar Sets



Pry Bar Sets

Features:

- Solid steel construction.
- Handle for comfort.
- Ground tips.
- Black oxide finish to reduce corrosion.

Handle Type: Plastic

Material: Steel

Includes: 4-Pc Pry Bar Set

SKU	Overall Length	Stock Shape
103-30-004	8 in; 12 in; 18 in; 24 in	Square

Socket Sets



21-Pc Socket Sets

Features:

- 3/4 in drive for larger jobs.
- Chrome vanadium steel provides strength and durability.
- Includes plastic carrying case for ease of use and storage.

Drive Type: Square

Opening Size: 7/8 in to 2 in

Includes: (16) 12 Pt Std. Sockets 7/8 to 2 in; 20 in Ratchet Handle; 20 in Sliding T-Bar; 4 in and 8 in Extension Bars; Metal Case

Material: Alloy Steel

Finish: Chrome

SKU	Drive Size	No. of Points
103-07-880	3/4 in	12



22 Piece Standard and Deep Socket Sets

Features:

- Multi-purpose and versatile.
- Deep sockets for a range of uses.
- Includes plastic carrying case for ease of use and storage.

Drive Type: Square

Opening Size: 3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in

Includes: (9) Deep Sockets 3/8 - 7/8 in; (9) Std. Sockets 3/8 - 7/8 in; 1-3/4 in & 3 in. Extensions; 8 in. Ratchet Handle; Blow Molded Case

Material: Alloy Steel

Finish: Chrome

SKU	Drive Size	No. of Points
103-07-846	3/8 in	6

Adjustable Wrenches



Adjustable Wrenches

Features:

- Hardened and tempered.
- Precision machined jaws and knurled adjusting worm.
- Plated to resist rust.

Head Angle: 15°

Material: Drop-Forged Alloy Steel

Finish: Chrome Plated

SKU	Opening Size	Overall Length
103-01-006	15/16 in	6 in
103-01-008	1-1/8 in	8 in
103-01-010	1-5/16 in	10 in
103-01-012	1-1/2 in	12 in
103-01-015	1-3/4 in	15 in
103-01-018	2-1/16 in	18 in
103-01-024	2-7/16 in	24 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Combination Wrenches & Sets



Combination Wrenches

Features:

- Polished heads and raised panel.
- 12 Point boxed in for more angles.
- Precision shaped to reduce rounding.

Head Angle: 15° Box End

Offset Angle: 15°

Material: Carbon Steel

Finish: Nickel Chrome Plated

SKU	Opening Size	Overall Length
103-04-001	5/16 in	5-1/2 in
103-04-002	3/8 in	5-1/2 in
103-04-003	7/16 in	6-1/2 in
103-04-004	1/2 in	7 in
103-04-005	9/16 in	7 in
103-04-006	5/8 in	8-7/8 in
103-04-008	3/4 in	9-3/4 in
103-04-010	7/8 in	11-1/2 in
103-04-011	15/16 in	12-1/2 in
103-04-012	1 in	13-1/8 in



Combination Wrench Sets

Features:

- Hardened and tempered.
- Fully polished for increased comfort.
- Roll pouch for easy organization.
- Convenient size for easy mobility.

Opening Type: Open/Box

SKU	Opening Size	Wt.
103-04-812	1/4 in [Min]; 7/8 in [Max]	3 lb
103-04-814	3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in; 15/16 in; 1 in; 1-1/16 in; 1-1/8 in; 1-1/4 in	10.5 lb
103-04-815	9 mm [Min]; 32 mm [Max]	10.5 lb



Jumbo Combination Wrenches

Features:

- Polished heads and raised panel.
- 12-point boxed in for more angles.
- Precision shaped to reduce rounding.

Head Angle: 15° Box End

Offset Angle: 15°

Material: Carbon Steel

Finish: Nickel Chrome Plated

SKU	Opening Size	Overall Length
103-04-013	1-1/16 in	14-9/16 in
103-04-014	1-1/8 in	14-9/16 in
103-04-016	1-1/4 in	14-9/16 in
103-04-017	1-5/16 in	18-1/2 in
103-04-018	1-3/8 in	18-1/2 in
103-04-019	1-7/16 in	21-1/4 in
103-04-020	1-1/2 in	21-1/4 in
103-04-022	1-5/8 in	21-1/4 in
103-04-023	1-11/16 in	24 in
103-04-024	1-3/4 in	24 in
103-04-025	1-13/16 in	24 in
103-04-026	1-7/8 in	24 in
103-04-028	2 in	24 in
103-04-034	2-3/8 in	24 in

Pipe Wrenches



Adjustable Pipe Wrenches

Features:

- Hardened and tempered.
- Malleable handles with heavy duty enamel finish.
- Accurately machined jaws and adjustment nut.

Jaw Material: Drop Forged Steel

Head Angle: 15°

SKU	Pipe Cap.	Overall Length	Material
103-01-308	1 in	8 in	Malleable Alloy
103-01-310	1-1/2 in	10 in	Malleable Alloy
103-01-312	2 in	12 in	Malleable Alloy
103-01-314	2 in	14 in	Malleable Alloy
103-01-318	2-1/2 in	18 in	Malleable Alloy
103-01-324	3 in	24 in	Malleable Alloy
103-01-336	5 in	36 in	Cast Iron



Aluminum Pipe Wrenches

Features:

- Hardened and tempered.
- Malleable handles with heavy duty enamel finish.
- Accurately machined jaws and adjustment nut.

Material: Aluminum

Jaw Material: Drop Forged Steel

Handle Type: I-Beam

Head Angle: 15°

SKU	Pipe Cap.	Overall Length
103-01-614	2 in	14 in
103-01-618	2-1/2 in	18 in
103-01-624	3 in	24 in
103-01-636	5 in	36 in
103-01-648	3-3/4 in	48 in

Levels



Magnetic Torpedo Levels

Features:

- Durable vials.
- Magnetic edge frees hands.
- Solid aluminum frame with top read.

Accuracy: 0.001 in

No. of Vials: 3

Vial Positions: (1) 45°; (1) Level; (1) Plumb

Vial Material: Acrylic

Base Type: Magnetic

Structure: I-Beam

Body Material: Aluminum

Width: 9 in

Height: 1.6 in

Wt.: 0.36 lb

SKU	Length
100-A581-9	9 in

Tape Measures



Easy to Read Tape Measures

Features:

- Groove for measuring on string or wire.
- Nail slot for drawing circles.
- Sliding end hook for true zero measurements.
- Sliding lock.

Graduations: 1/8 in

Blade Material: Steel

End Type: Hook

Case Material: ABS

Return Motion: Spring

Type: Single Side Tape

SKU	Blade Length	Blade Width	No. of Scales	Blade Finish	Color
103-43-113	12 ft	1/2 in	1	Painted	Chrome
103-43-119	16 ft	3/4 in	1	Painted	Chrome
103-43-123	25 ft	1 in	2	Yellow Enamel	Chrome
103-43-127	25 ft	1 in	1	Painted	Yellow
103-43-128	25 ft	1 in	1	Painted	Green
103-43-129	25 ft	1 in	1	Painted	Orange

Sand Strainers



Sand Strainers

Features:

- 8 in opening.
- Stainless steel strainer.
- Plastic handle.
- Hanging hole in handle.

Dia.: 8 in

SKU	Material
103-1046017	Stainless Steel

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Specialty Gages



Weld Fillet Gauges

Features:

- Gauge is rust-proof and bend proof.
- Die blanked to eliminate sharp edges and add to accuracy.
- Permanently etched for long life.

Measuring System: Inch; Millimeter

Accuracy: +/- 5.6 micron

Finish: Matt Polished

SKU	Range
100-NFG-7	1/8 in - 1 in

Battery Clamps



Heavy Duty Battery Clamps

Features:

- Excellent electrical and physical properties.
- Hammer-on copper connection.
- Heavy duty tension spring gives positive connection on front and side.
- Vinyl insulation that is highly resistant to oil, acid, abrasion, chemicals and ozone.
- Color-coded.

Jaw Opening: 1-1/2 in


Jaw Material: Steel

Wt.: 1/2 lb

Cable/Wire Size: 1 AWG - 3/0 AWG

Amps: 500 A

SKU	Color
102-67120B	Black
102-67120R	Red



Battery Clamps

Features:

- Features all steel jaws.
- Superb electrical conductivity.
- Heavy-duty tension spring for positive connection.
- Vinyl insulation.
- Color coded.

Test & Approvals: ISO 9001 manufacturer

Jaw Opening: 1-1/2 in

Jaw Material: Steel

SKU	Cable/Wire Size	Amps
900-BC-600	1 AWG - 3/0 AWG	600 A

Booster Cables



Booster Cables

Features:

- Ultra flexible cable, chemical and abrasion resistant, sequentially marked every foot.
- Made in USA.

Clamp Rating: 500 A

Cable/Wire Size: 4 AWG

SKU	Length
100-JUMPERCABLES-15FT-AB	15 ft
100-JUMPERCABLES-20FT-AB	20 ft

Tarps



Multiple Use Tarps

Features:

- Sun and fade resistant.
- Rot and rust proof.
- Reinforced hem.
- Heat-sealed seams.
- Grommets every 3 ft.

Material: Polyethylene

Thickness: 5 mil

Resistance: Fade; Rot and Rust Proof; Sun

SKU	Length	Width
101-0507	7 ft	5 ft
101-0608	8 ft	6 ft
101-0810	10 ft	8 ft
101-0812	12 ft	8 ft
101-0912	12 ft	9 ft
101-1012	12 ft	10 ft
101-1016	16 ft	10 ft
101-1020	20 ft	10 ft
101-1212	12 ft	12 ft
101-1216	16 ft	12 ft
101-1220	20 ft	12 ft
101-1225	25 ft	12 ft
101-1525	25 ft	15 ft
101-1530	30 ft	15 ft
101-1620	20 ft	16 ft
101-1824	24 ft	18 ft
101-2020-TARP	20 ft	20 ft
101-2030	30 ft	20 ft
101-2040	40 ft	20 ft
101-3040	40 ft	30 ft
101-4060	60 ft	40 ft



Protective Tarps

Features:

- Protect or conceal your equipment or supplies while eliminating condensation.
- All double-stitched seams and hems with brass tie-down grommets spaced approximately 24 inches apart all around.

Material: Canvas

Resistance: Mildew; Water

SKU	Length	Width	Thickness	Color
103-92560	8 ft	6 ft	25 mil	Brown
103-92551	10 ft	8 ft	20 mil	Green
103-92561	10 ft	8 ft	25 mil	Brown
103-92562	12 ft	10 ft	25 mil	Brown
103-92556	30 ft	20 ft	20 mil	Green

Brushes, Brooms, & Broom Handles



Warehouse Brooms

Features:

- Ideal for heavy-duty sweeping tasks.
- Reliable broom corn bristles are sturdy, yet flexible.


Handle Length: 42 in

Bristle Length: 20 in

SKU	Bristle Material
103-W36-DZ	80/20 Corn/Sotol

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Wood Threaded Handles

Features:

- Replacement handle.
- Fits most push brooms.

Handle Diameter: 15/16 in

Handle Type: Threaded Handle

Used With: Brushes; Paint Rollers; Push Brooms

SKU	Material	Handle Length
103-5S-HDL	Southern Yellow Pine Wood	60 in



Wooden Broom Handles

Features:

- Smooth lacquered hardwood handle.
- Durable wood threaded tip.

Handle Diameter: 15/16 in

Handle Type: Threaded Metal

SKU	Material	Handle Length
102-5HDLEMT	Hardwood	60 in




Whisk Brooms

Features:

- 100% corn-bristle hand broom makes cleaning up easier.
- Stitched headband keeps bristles contained and adds strength.
- Metallic hand-grip adds convenience and durability.

Bristle Length: 12 in

SKU	Includes	Bristle Material
103-500WB	Metal Cap with Hanging Ring	100% Broom Corn

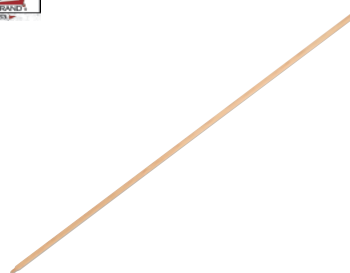

Wood Tapered Handles

Features:

- Replacement handle.
- Fits most push brooms.

Handle Diameter: 1-1/8 in

Handle Type: Tapered Handle

Used With: Brushes; Push Brooms

SKU	Material	Handle Length
103-5T-HDL	Southern Yellow Pine Wood	60 in

Floor & Carpet Cleaners



Oil-Based Non-Sanded Floor Sweeping Compounds

Features:

- Non-abrasive sweeping compound safe to use on any floor.
- Perfect for collecting dirt and dust on all types of wood, tile, terrazzo, and finished concrete floors without scratching.

SKU	Capacity	Packing Type
103-FLOORSWEEP	50 lb	Box



Oil-Based Sanded Floor Sweeping Compounds

Features:

- Popular regular formula features sanded grit with an oil base.
- Effective as an abrasive for loosening grime and dirt on warehouse floors.
- Suitable for unfinished wood or concrete surfaces.
- Ideal for heavy-duty industrial cleaning tasks.

SKU	Capacity	Packing Type
103-FLOORSWEEP-GRIT	50 lb	Box
1103-FLOORSWEEP-DRM300	300 lb	Drum



Wax-Based Floor Sweeping Compound

Features:

- Non-sanded, wax-based formula.
- Conditions as it cleans.
- Suitable for most surfaces, finished or unfinished.
- Keeps floors looking their best.

SKU	Capacity	Packing Type
103-FLOORSWEEP-WAX50	50 lb	Box
103-FLOORSWEEP-WAX100	100 lb	Drum
103-FLOORSWEEP-WAX150	150 lb	Drum

Coco Mats



Coco Mats

Features:

- Heavy-duty.
- Tough absorbent fibers hold up under any type of foot traffic.
- Mildew resistant.

Height: 1-1/2 in

Color: Natural Tan

Material: Densely Woven Fibers

SKU	Length	Width
103-AB-GDN-12	48 in	36 in
103-AB-GDN-3	30 in	18 in
103-AB-GDN-4	33 in	20 in
103-AB-GDN-5	36 in	22 in
103-AB-GDN-9	48 in	30 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Rig Wash & Creme Beads



Creme Beads Granular Detergents

Features:

- Surfactants are biodegradable.
- Spray dried to homogenize ingredients and produce hollow beads that are extremely soluble even in cold water.
- Averages 5.6hosphorus.

SKU	Capacity Wt.
103-AB-CB50	50 lb
103-AB-CB100	100 lb



Rig Washing Detergents

Features:

- Super Heavy-Duty Concentrate.
- Cuts through heavy oils, grease and drill muds.
- Helps equipment run at optimum levels.
- For use in on and off shore drilling rigs.
- Eliminates residue on pumps, pads and jacks, platforms, derricks, liners, casings, crown and traveling blocks and blow out preventers.
- Dilutions vary depending on application, optimum dilution 1 to 6 ounces per gallon.
- Can be diluted and used in spray bottles.

SKU	Applications
103-500805	Rig Wash
103-500801	Rig Wash
103-AB-RW50	Hand Cleaning; Derricks; Stairways; Rigging Equip

Markers



Paint Markers

Features:

- Permanent, durable, fast-curing, industrial-strength paint.
- Lead- and xylene-free paint.
- Marks on all surfaces, whether they're clean, dirty or oily.
- Reversible tip.
- Easy grip clip cap on one end and cap holder on other end.

Temp Range: -50° F - 150° F

Capacity Vol.: 10 ml

SKU	Color	Tip Size
900-PAINTMKR-BLK	Black	3/16 in; 1/8 in
900-PAINTMKR-RED	Red	3/16 in; 1/8 in
900-PAINTMKR-YEL	Yellow	3/16 in; 1/8 in
900-PAINTMKR-BLU	Blue	3/16 in; 1/8 in
900-PAINTMKR-WHT	White	2 mm; 4 mm

Soapstones



Soapstones

Features:

- All white texture for excellent marking quality.
- Grain cut to ensure good strength and long service life.
- Marks will not contaminate welds and are easily removed.
- Low water content for increased hardness and resistance to breakage.

Length: 5 in

SKU	Shape
900-FL-5	Flat
900-RD-5	Round
900-SQ-5	Square
900-FL-5-THIN	Flat

Soapstone Holders



Standard Soapstone Holders

Features:

- Pocket clip.
- Positive lock adjustment.
- Spring tension friction guide for soapstone.

Length: 5 in

SKU	Shape	Used With	Includes
900-RH-30	Round	Standard Round Soapstone	Pocket Clip; Soapstone
900-RH-30L	Round	Standard Round Soapstone	Holder Only
900-SH-10	Flat	Standard Flat Soapstone	Pocket Clip; Soapstone



Soapstone Holders

Features:

- Holds Finline Soapstone.
- Precision formed tips.
- Great for everyday use.

SKU	Shape	Length
900-20116	Flat	5 in

Stands & Ramps



Hi-Jack Style Pipe Stands

Features:

- Features durable folding frame.
- Effectively holds pipe and tubing in position during pipe welding applications.
- Adjustable height.

Height: 28 in - 49 in

Material: All Steel

SKU	Load Cap.	Pipe Diam.
900-PIPE-STAND-HJ	2500 lb	1/2 in - 18 in



Heavy Duty Pipe Stands

Features:


- Effectively holds pipe and tubing in position during pipe welding applications.
- Adjustable height.

Height: 28 in - 49 in

Material: All Steel

SKU	Load Cap.	Pipe Diam.
900-PIPE-STAND-HDJ	2500 lb	1/2 in - 18 in

Rollers



Ball Transfer Heads

Features:

- Sturdy ball transfer head is designed to slides over a standard V-head.
- Facilitates rotation of pipe/tubing during pipe welding.

Capacity Wt.: 1000 lb

SKU	Used With	Type
900-PS-BTH-1	V-Head Pipe Stand	Single Ball
900-PS-BTH-2	V-Head Pipe Stand	Dual Ball

Aprons



Bib Aprons

Features:

- High quality vinyl apron withstands a broad range of acids, solvents, grease, chemicals.
- Adjustable shoulder & waist cloth strap.
- Apron conceals a large portion of the body.

Width: 35 in

Material: Vinyl

Resistance: Puncture; Tear

SKU	Length
101-AG-100	45 in



Hycar Aprons

Features:

- Sturdy hycar bib apron is abrasion-resistant for extra protection.
- Withstands cold temperatures.
- Apron conceals a large portion of the body.

Width: 35 in

Material: Hycar

Style: Bib Apron

Resistance: Abrasion; Chemical; Grease

SKU	Length
101-AR-100	45 in



Blue Denim Aprons

Features:

- Sturdy apron is made from 100% cotton denim fabric.
- Made with serged seams and pre-shrunk for optimum launderability.
- Metal grommets hold neck strap and waist ties, adding durability and comfort.
- A convenient pocket makes it easy to tote around the necessities.

Width: 28 in

Material: 3 x 1 Weave; 10 oz; 100% Cotton/Denim

Style: Bib Apron

SKU	Color	Length
902-200-011	Blue	36.5 in



Premium Side Split Cowhide Leather Waist Aprons

Features:

- Constructed with high-quality, durable, and pliable side split cowhide.
- Seams are double-lock stitched with 5-ply Kevlar® thread.
- Riveted seams at major stress points for maximum durability.
- 40 in adjustable waist with quick-release strap.
- Extension straps sold separately.

Width: 24 in

Resistance: Abrasion; Heat

SKU	Length
902-300	24 in



Premium Side Split Cowhide Leather Bib Aprons

Features:

- Constructed with high-quality, durable, and pliable side split cowhide.
- Seams are double-lock stitched with 5-ply Kevlar® thread.
- Riveted seams at major stress points for maximum durability.
- Adjustable self-balancing shoulder straps.
- 40 in adjustable waist with quick-release strap.
- Extension straps sold separately.

Width: 24 in

Resistance: Abrasion; Heat

SKU	Length
902-400	36 in
902-500	42 in



8" extension strap w/ quick release



Leather Apron Waist Extensions

Features:

- Extends the waist of leather aprons with a quick connect and disconnect.

Material: Nylon

SKU	Color	Length
902-44-0118	Red	8 in



Cotton Sateen Split Leg Bib Aprons

Features:

- Adjustable shoulder straps.
- Provides superior protection.
- Flame retardant fabric.

Width: 24 in


Material: Cotton Sateen

Resistance: Flame Retardant

SKU	Length
902-CA-300-S	36 in
902-CA-302-S	42 in
902-CA-301-S	48 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Flame-Retardant Cotton Sateen Bib Aprons

Features:

- Made from durable 9 oz flame-retardant (FR) cotton sateen.
- Adjustable neck and waist straps.

Width: 24 in

Resistance: Flame Retardant

SKU	Length
902-CA-400	36 in
902-CA-500	42 in



Flame-Retardant Cotton Sateen Bib Aprons with Leather Protective Patch


Features:

- Made from durable flame-retardant (FR) cotton sateen.
- Leather patch for added protection.
- Adjustable neck and waist straps.

Width: 24 in

Resistance: Flame Retardant

SKU	Length
902-CA-600	36 in
902-CA-700	42 in



Select Split Cowhide Leather Bib Aprons

Features:

- Constructed with select split cowhide.
- Sewn with Kevlar® thread.
- Riveted seams at major stress points for maximum durability.
- Adjustable self-balancing shoulder straps.
- 40 in adjustable waist with quick-release strap.
- Extension waist straps sold separately.

Width: 24 in

Resistance: Abrasion; Heat

SKU	Length
902-Q-5	36 in
902-Q-6	42 in
902-Q-7	48 in



Chaps

Features:

- Adjustable waist belt and a quick release buckle.
- Thigh, knee and leg straps are fitted with adjustable snap fasteners.

Width: 14 in

Material: Leather

Resistance: Spatter; Heat

SKU	Length
902-Q-13	40 in

Coats & Jackets



Flame Retardant (FR) Cotton Sateen Jackets

Features:

- Attractive cotton sateen jacket features a full jacket collar.
- Adjustable black snaps on cuffs provide additional flashback protection.
- Made from 100% flame retardant (FR) cotton sateen fabric.

Length: 30 in

SKU	Size Group
902-CA-1200-S	Small
902-CA-1200-M	Medium
902-CA-1200-L	Large
902-CA-1200-XL	X-Large
902-CA-1200-2XL	2X-Large
902-CA-1200-3XL	3X-Large
902-CA-1200-4XL	4X-Large



Leather/FR Sateen Combo Jackets

Features:

- Leather/FR sateen combo jacket provides comfortable protection.
- Five insulated snaps with spatter guard front closure keep wearer safe and secure.
- Flame retardant sateen body for cool protection.
- Leather sleeves for heat, flame and abrasion resistance.

SKU	Size Group	Length
902-1201-M	Medium	30 in
902-1201-L	Large	30 in
902-1201-XL	X-Large	32 in
902-1201-2XL	2X-Large	33 in
902-1201-3XL	3X-Large	33 in



Premium Flame Retardant Jackets

Features:

- Washable, 9 oz cotton jacket provides workplace safety with its flame retardancy and highly visible Safety Orange color.
- Hemmed collar increases durability despite repeated washes.
- Specially designed under arm sport cut for increased mobility.
- Dielectric, front closure snaps protect user from electric current.
- Spatter guard flap with hook and loop closure behind front closure snaps prevent sparks and spatter from intruding.

SKU	Size Group	Length
902-1230-M	Medium	30 in
902-1230-L	Large	30 in
902-1230-XL	X-Large	32 in
902-1230-XXL	2X-Large	33 in
902-1230-XXXL	3X-Large	34 in



Split Cowhide Leather Jackets

Features:

- Sturdy split cowhide leather jacket features a comfortable FR collar.
- 5-ply Kevlar® stitching adds durability and strength.
- Lined shoulder for improved mobility.
- Inside pockets provide convenient storage for small items.

Closure Type: Insulated Snaps

SKU	Size Group	Length
902-1200-L	Large	30 in
902-1200-XL	X-Large	32 in
902-1200-2XL	2X-Large	33 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Split Cowhide Leather Welding Jackets

Features:

- Quality leather jacket constructed with select split cowhide.
- Heat- and abrasion-resistant to withstand general welding applications.
- Sewn with KEVLAR® thread with riveted seams at major stress points for maximum durability.

Style: Front Snap Closure With Hook and Loop Collar

Length: 30 in

SKU	Size Group
902-Q-1-M	Medium
902-Q-1-L	Large
902-Q-1-XL	X-Large
902-Q-1-2XL	2X-Large
902-Q-1-3XL	3X-Large
902-Q-1-4XL	4X-Large

Sleeves & Bibs



FR Cotton Sateen Bibs

Features:

- Made from flame retardant cotton.
- Size adjustable strap allows user to size to fit.
- Attaches to CA-650 style cape sleeves.

Material: Flame-Retardant Cotton Sateen

SKU	Length	Closure Type
902-CA-175L-SNAPS	18 in	Snaps
902-CA-175XL-SNAPS	24 in	Snaps
902-CA-175XL-24	24 in	Hook-and-Loop



FR Sateen Sleeves

Features:

- Made with flame retardant (FR) cotton sateen.
- Elastic at both ends (bicep and wrist) for arm protection.

SKU	Size Group	Length
902-CA-340-18	One Size	18 in



FR Cotton Sateen Sleeves

Features:

- Reliable forearm protection.
- Elastic cuff for comfort.
- Flame retardant cotton.

Closure Type: Snaps

SKU	Size Group	Length
902-CA-350	One Size Fits Most	23 in



FR Cotton Sateen Cape Sleeves

Features:

- 9-oz flame-retardant cape sleeves provide protection at minimal cost.
- Under-the-arm sport cut for increased mobility and hemmed collar to retain shape after many washings.
- Retains flame retardancy for up to 50 normal home washings and 25 commercial.
- Can be worn with detachable 14-in and 20-in bibs (sold separately).

SKU	Size Group	Closure Type
902-CA-650-M	Medium	Hook-and-Loop
902-CA-650-L	Large	Hook-and-Loop
902-CA-650-XL	X-Large	Hook-and-Loop
902-CA-650-2XL	2X-Large	Hook-and-Loop
902-CA-650-3XL	3X-Large	Hook-and-Loop
902-CA-650-M-SNAPS	Medium	Snaps
902-CA-650-L-SNAPS	Large	Snaps
902-CA-650-XL-SNAPS	X-Large	Snaps
902-CA-650-2XL-SNAPS	2X-Large	Snaps
902-CA-650-3XL-SNAPS	3X-Large	Snaps



Leather Bibs

Features:

- Detachable bib with snaps.
- Open back for comfort and cooling.
- Attaches to cape sleeves (not included).

Size Groups: One Size

SKU	Length	Material	Color
902-Q-3	14 in	Leather	Golden Brown
902-Q-4	20 in	Split Cowhide	Lava Brown



Leather Helmet Bibs

Features:

- Fits on any welding helmet.
- Split leather with metal clips.
- Metal stays for numerous mounting options.
- Cuts down significantly on UV neck exposure.
- Reduces sparks and slag on the neck area.

Length: 8 in

Width: 8 in

SKU	Used With	Type
902-85	Welder's Helmet	Standard



Leather Sleeves

Features:


- Protective leather sleeve is heat resistant, soft, pliable, and yet very durable.
- Adjustable black snaps at wrist.

Size Group: One Size Fits Most

SKU	Length	Color
902-350	23 in	Lava Brown
902-Q-12	23 in	Golden Brown

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Leather Cape Sleeves

Features:

- High quality leather cape sleeves.
- Provides effective resistance against cuts, sparks and slag.
- Adjustable cuffs with wrist snaps.

Length: 14 in

SKU	Size Group	Width
902-Q-2-M	Medium	40 in - 40 in
902-Q-2-L	Large	44 in - 46 in
902-Q-2-XL	X-Large	48 in - 50 in
902-Q-2-2XL	2X-Large	52 in - 54 in
902-Q-2-3XL	3X-Large	56 in - 58 in



Split Cowhide Cape Sleeves

Features:

- Double lock stitched with high strength 5-ply Tex 90 Dupont™ Kevlar® thread.
- FR lined collar.
- Open back design allows cool comfort and protection for hot climate conditions.
- Can be worn with 14 in and 20 in bibs (sold separately) which are detachable via electrical insulated snaps and have waist straps with quick release buckle systems.

SKU	Size Group	Length
902-650-L	Large	14 in

Rainwear



3-Pc Rainsuits

Features:

- Jacket is vented back for breathability, duo-layer front closer to prevent wet, two front patch pockets for storage, and a corduroy collar for comfort.
- Removable hood with drawstring.
- Adjustable suspenders for overalls with triangular buckles for perfect fit and single snap fly.

Material: PVC Over Polyester

SKU	Size Group
101-9000-S	Small
101-9000-M	Medium
101-9000-L	Large
101-9000-XL	X-Large
101-9000-2XL	2X-Large
101-9000-3XL	3X-Large
101-9000-4XL	4X-Large
101-9000-5XL	5X-Large
101-9000-6XL	6X-Large



48 in Raincoats with Detachable Hood

Features:

- Vented cape back with storm flap.
- Detachable hood with drawstring.
- Corduroy collar for comfort.
- Two outside pockets with flaps.
- Storm flap with snap front closures.

Material: PVC Over Polyester

SKU	Size Group
101-9010-S	Small
101-9010-M	Medium
101-9010-L	Large
101-9010-XL	X-Large
101-9010-2XL	2X-Large
101-9010-3XL	3X-Large
101-9010-4XL	4X-Large
101-9010-5XL	5X-Large

Boots & Shoes



Slush Boots

Features:

- 100% waterproof protection designed to fit easily over shoes or boots.
- Adjustable side strap.
- Has a cross rib outsole to reduce slippage.

Material: Rubber

Lining: 100% Cotton

SKU	Size Group	Height
101-9040-9	9	17 in
101-9040-10	10	17 in
101-9040-11	11	17 in
101-9040-12	12	17 in
101-9040-13	13	17 in
101-9040-14	14	17 in
101-9040-15	15	17 in
101-9040-16	16	17 in
101-9040-17	17	17 in
101-9040-18	18	17 in

Footwear Covers



Spats

Features:

- Elastic top with 2 buckles on back of leg.
- Metal reinforced boot.
- Sold per pair.
- Velcro fasteners that ensure a secure fit for various shoe sizes.
- Protects footwear.

SKU	Size Group	Material	Type
902-Q-15	One Size Fits Most	Leather	Reinforced
902-220	One Size Fits Most	Leather	Metal Reinforced

Knee Pads



Leather Knee Pads

Features:

- Leather with sponge padding.
- Two adjustable straps.
- Abrasion resistant without the slipping effects of plastic caps.
- Lightweight.

Size Group: Universal

SKU	Material	Fastening Method
902-63KP	Leather	Adjustable Strap

Multi-Purpose Scrubbing Wipes



Multi-Purpose Scrubbing Wipes

Features:

- Dual textured wipe, a textured side and a smooth side
- Extra large, durable wipes, 10 inch x 12 inch
- Multi-purpose to use on hands, tools, and surfaces
- No water needed
- Contains no harsh chemicals
- Leaves hands feeling clean and refreshed.

SKU	Quantity	Length
103-360726	72 Sheets Per Roll	12 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Safety Glasses, Parts, & Accessories



Lens Cleaning Towelette Dispensers

Features:

- Pre-moistened with C-Clear Anti-Fog, Anti-Static formula for use on plastic, polycarbonate and glass lenses.
- Strategic placement of towelette dispensers throughout a facility will promote proper lens cleaning habits and extend the life of prescription and non-prescription eyewear.
- Contains no silicone.
- Safe and effective with all lens coatings including Anti-Reflective Coating.
- Also good for use on goggles, face shields, CRT screens and microscopes.

Quantity: 100 Individually Packaged Towelettes

SKU	Width	Length
101-70-AB	5 in	8 in



Clear Frameless Safety Glasses

Features:

- These clear frameless safety glasses are scratch resistant.
- Good for everyday use or a visitor spec.
- Lightweight glasses that are good for long term wear.

Lens Material: Polycarbonate

qww	Frame Color
101-VSC110	Clear



Soft Protective Goggles

Features:

- Soft frame fits snugly and comfortably over face and prescription glasses.
- Transparent frame allows vision in all directions.
- Direct ventilation is provided by perforations in the frame on top and bottom.

Lens Material: Polycarbonate

Frame Material: Vinyl

Ventilation: Direct

Strap Material: Elastic

SKU	Frame Color	Lens Tint
101-AB-G350	Clear	Clear



Cup Goggles

Features:

- Baffled side-shields allow maximum ventilation while preventing entry of light.
- Adjustable elastic headband and nose piece for comfort.
- Lightweight and durable.
- Complete with shade 5 lens.

Lens Coating/Shade: IR/UV 5.0

Lens Material: Polycarbonate

Frame Material: Hard Plastic

Ventilation: Indirect

Strap Material: Elastic

SKU	Frame Color	Lens Tint
901-WG-50C	Green	Green



Ridged Goggle

Features:

- Contoured shape fits snugly for comfort.
- Fits over Rx glasses.
- Parts easily removable for replacement.
- Complete with shade 5 lens.


Lens Coating/Shade: IR/UV 5.0

Lens Material: Hardened Glass

Frame Material: Hard Plastic

Strap Material: Elastic

SKU	Frame Color	Lens Tint
901-WG-2414RFF	Green	Green

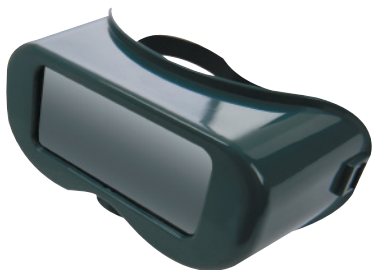

Soft-Sided Goggle

Features:

- Soft frame fits snugly and comfortably over face and Rx glasses.
- Hooded vents offer maximum fog-free protection.
- Accommodates magnifier plate.
- Complete with shade 5 lens.

Lens Coating/Shade: IR/UV 5.0

Lens Material: Hardened Glass

Frame Material: Vinyl

Ventilation: Hooded Vent

Strap Material: Elastic

SKU	Frame Color	Lens Tint
Fixed Front		
901-WG-2414SFF	Green	Green
Lift Front		
901-WG-2414SLF	Green	Green



Welding Goggles

Features:

- Soft vinyl frame comfortably molds to the face and fits easily over prescription glasses.
- Hooded vents to prevent fogging.
- Features a 50 mm front lens for dual usage and added safety.
- Complete with shade 5 lens.

Lens Material: Polycarbonate

Frame Material: Vinyl

SKU	Lens Tint	Lens Coating/Shade	Ventilation	Strap Material
901-WG-FF-50MM	Green	Shade #5	Indirect Vent	Rubber
901-WG-LF-50MM	Green	IR/UV 5.0 Coating; #5 Shade	Hooded Vent	Elastic

Faceshields & Visors



Visor Head Gear

Features:

- Absorbent air cushioned sweatband.
- 45 head size ratchet head gear.

Length: 23-7/8 in

Height: 25-1/2 in

SKU
101-UVH700

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.




Replacement Visors

Features:

- Clear or shaded available.
- Durable and high-performance.

SKU	Lens Coating/Shade	Binding	Length	Height	Thickness
Jackson Safety® Head Gear/Cap Adaptors					
101-8040-B-CL	Clear	Aluminum Bound	12 in	8 in	0.040 in
101-3440-B-CL	Clear	Aluminum Bound	15-1/2 in	9 in	0.040 in
101-3440-U-CL	Clear	Unbound	15-1/2 in	9 in	0.040 in
101-3441-B-LG	Light Green	Aluminum Bound	15-1/2 in	9 in	0.040 in
101-3441-U-LG	Light Green	Unbound	15-1/2 in	9 in	0.040 in
101-8042-B-DG	Dark Green	Aluminum Bound	12 in	8 in	0.040 in
101-3442-B-DG	Dark Green	Aluminum Bound	15-1/2 in	9 in	0.040 in
101-3442-U-DG	Dark Green	Unbound	15-1/2 in	9 in	0.040 in
101-3465-5	Shade 5.0	Aluminum Bound	15-1/2 in	9 in	0.040 in
Fibre-Metal® Head Gear/Cap Adaptors					
101-4118-C	Clear	Unbound	12 in	8 in	0.040 in
101-4178-C	Clear	Unbound	16-1/2 in	8 in	0.040 in
101-4199-C	Clear	Unbound	19 in	9-3/4 in	0.040 in
101-4118-DG	Dark Green	Unbound	11 in	8 in	0.040 in
101-4178-DG	Dark Green	Unbound	16-1/2 in	8 in	0.060 in
101-4199-5	Shade 5.0	Unbound	19 in	9-3/4 in	0.040 in

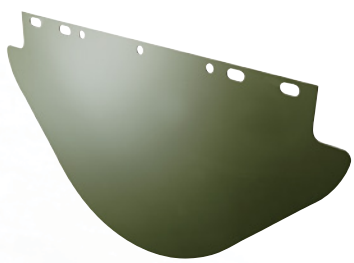

Replacement Visors

Features:

- Durable and high-performance.
- Universal holes fit most manufacturer's head gear/cap adaptors.

Binding: Unbound

Color: Dark Green

Length: 19 in

Height: 9-3/4 in

Thickness: 0.06 in

SKU	Lens Coating/Shade	Lens Material
901-932-4199UDG	Dark Green	PETG

Welding Helmet Parts & Accessories



Cover Lens

Features:

- Meets all applicable specifications and standards.
- Resistant to abrasion, pitting, spatter, chemicals and solvents.

Material: 100% Polycarbonate

Color: Clear

SKU	Window Size
101-A-427-N/L	3-3/16 in x 3-3/16 in
101-A-428	2-1/8 in x 4-1/16 in
101-A-429	1-5/8 in x 3-9/16 in
101-PCC-24	4-1/4 in x 2 in
101-UV237M	4 1/4 in x 2 in
101-UV2739J	5-1/4 in x 4-1/2 in
101-UV2740J	4-3/16 in x 2-9/16 in
101-UV326M	5.675 in x 4.742 in
101-UV327M	4-1/2 in x 4-1/4 in
101-UV410M	1-3/4 in x 4-1/4 in
101-UV411M	3-5/8 in x 4-1/2 in
101-UV921M	5-1/2 in x 4-1/2 in




Cover Lens

Features:

- Convenient protective cover lens is resistant to abrasion, pitting, spatter, chemicals and solvents.
- Optically correct and balanced.
- Provides superior welding lens protection.

Color: Clear

SKU	Window Size	Material
901-SP-1	2 in x 4-1/4 in	70% CR-39 Plastic
901-SP-2	2 in x 4-1/2 in	100% CR-39 Plastic
901-SP-25	3 in x 5 in	70% CR-39 Plastic
901-SP-35	4-1/2 in x 5-1/4 in	50% CR-39 Plastic
901-SP-45	5-1/4 in x 4-1/2 in	CR-39 Plastic
901-SP-1G	50 mm	50% CR-39 Plastic
901-932-H427	6-3/8 in x 3-13/16 in	Polycarbonate

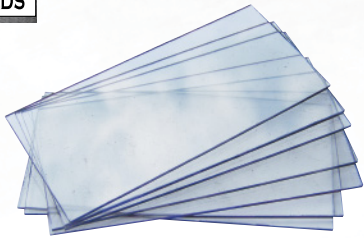

Cover Plate

Features:

- Sturdy, shatterproof protection plate.
- Optically clear for optimal visibility.
- Durable for long product life.

Window Size: 2 in x 4 1/4 in

Material: Polycarbonate

Color: Clear

SKU	Window Size
901-932-1440-BULK	2 in x 4 1/4 in



Glass Filter Plates

Features:

- Best Welds filter plates offer ultimate protection against ultraviolet and infrared rays present in the welding environment.
- Precision ground and edged to allow a safe and proper fit.
- Precisely shaded and optically correct.

Color: Green

Material: Hardened Glass

SKU	Lens Coating/ Shade	Window Size
901-932-105-10	10	2 in x 4-1/4 in
901-932-105-11	11	2 in x 4-1/4 in
901-932-105-12	12	2 in x 4-1/4 in
901-932-105-13	13	2 in x 4-1/4 in
901-932-105-14	14	2 in x 4-1/4 in
901-932-105-5	5	2 in x 4-1/4 in
901-932-105-8	8	2 in x 4-1/4 in
901-932-105-9	9	2 in x 4-1/4 in
901-932-107-10	10	4-1/2 in x 5-1/4 in
901-932-107-11	11	4-1/2 in x 5-1/4 in
901-932-107-12	12	4-1/2 in x 5-1/4 in
901-932-107-13	13	4-1/2 in x 5-1/4 in
901-932-107-14	14	4-1/2 in x 5-1/4 in
901-932-107-5	5	4-1/2 in x 5-1/4 in
901-932-107-8	8	4-1/2 in x 5-1/4 in
901-932-107-9	9	4-1/2 in x 5-1/4 in
901-932-205-5	Shade 5	50mm



Glass Magnifier Plate

Features:

- Magnify like magic with a sturdy glass magnifier plate that provides optically balanced magnification.
- Allows users to see work-piece clearly.
- Long-lasting.

Material: Glass

Style: Rectangular

Window Size: 2 in x 4.25 in

Color: Clear

SKU	Diopter Strength
901-932-145-75	0.75
901-932-145-100	1
901-932-145-125	1.25
901-932-145-150	1.5
901-932-145-175	1.75
901-932-145-200	2
901-932-145-225	2.25
901-932-145-250	2.5
901-932-145-300	3
901-932-145-350	3.5



Glass Silver Mirror Filter Plate

Features:

- Sturdy silver mirror filter plate reflects harmful infrared rays while staying cooler than a conventional green filter plate.
- Precisely shaded and optically correct.
- Precision ground and edged to allow a safe and proper fit.

Resistance: IR Emissions

Material: Glass

Style: Rectangular

SKU	Lens Coating/ Shade	Window Size
901-932-115-10	Silver/10	2 in x 4.25 in
901-932-115-11	Silver/11	2 in x 4.25 in
901-932-115-12	Silver/12	2 in x 4.25 in
901-932-115-9	Silver/9	2 in x 4.25 in
901-932-117-10	Silver/10	4.5 in x 5.25 in
901-932-117-11	Silver/11	4.5 in x 5.25 in
901-932-117-12	Silver/12	4.5 in x 5.25 in
901-932-117-13	Silver/13	4.5 in x 5.25 in
901-932-117-9	Silver/9	4.5 in x 5.25 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Gold Coated Filter Plate

Features:

- Gold coated filter plate reflects harmful infrared rays while staying cooler than a conventional green filter plate.
- Precisely shaded and optically correct.
- Light-weight and impact-resistant.

Material: Polycarbonate

Style: Rectangular

SKU	Lens Coating/ Shade	Window Size
901-932-109-8	Gold/8	2 in x 4.25 in
901-932-110-8	Gold/8	4.5 in x 5.25 in
901-932-109-9	Gold/9	2 in x 4.25 in
901-932-110-9	Gold/9	4.5 in x 5.25 in
901-932-109-10	Gold/10	2 in x 4.25 in
901-932-110-10	Gold/10	4.5 in x 5.25 in
901-932-109-11	Gold/11	2 in x 4.25 in
901-932-110-11	Gold/11	4.5 in x 5.25 in
901-932-109-12	Gold/12	2 in x 4.25 in
901-932-110-12	Gold/12	4.5 in x 5.25 in



Hardened Glass Gold Filter Plates

Features:

- Strong glass plates with gold coloring reflect harmful infrared rays while staying cooler than a conventional green filter plate.
- Precisely shaded and optically correct.
- Precision ground and edged to allow a safe and proper fit.

Material: Glass

Style: Rectangular

SKU	Lens Coating/ Shade	Window Size
901-932-248-9	Gold/9	2 in x 4.25 in
901-932-458-9	Gold/9	4.5 in x 5.25 in
901-932-248-10	Gold/10	2 in x 4.25 in
901-932-458-10	Gold/10	4.5 in x 5.25 in
901-932-248-11	Gold/11	2 in x 4.25 in
901-932-458-11	Gold/11	4.5 in x 5.25 in
901-932-248-12	Gold/12	2 in x 4.25 in
901-932-458-12	Gold/12	4.5 in x 5.25 in



Plastic Magnifier Plate

Features:

- Powerful plastic magnifier plate works to provide optically balanced magnification.
- Allows users to see work-piece clearly.
- Light-weight and impact-resistant for durability and strength.

Window Size: 2 in x 4-1/4 in

Material: Polycarbonate

Style: Rectangular

Color: Clear

SKU	Diopter Strength
901-932-146-100	1
901-932-146-125	1.25
901-932-146-150	1.5
901-932-146-175	1.75
901-932-146-200	2
901-932-146-225	2.25
901-932-146-250	2.5
901-932-146-75	0.75



Safety Plate

Features:

- Safety plate provides strong impact resistance for added safety.
- Optically correct and balanced.
- Light-weight.

Material: Polycarbonate

Style: Rectangular

Color: Clear

SKU	Window Size
901-932-440	2 in x 4.25 in
901-932-442	4.5 in x 5.25 in



Shaded Filter Lens

Features:

- Polycarbonate construction.
- Lightweight.
- Protects against ultraviolet and infrared rays.

Material: Polycarbonate

SKU	Lens Coating/ Shade	Window Size	Color
901-932-106-10	Shade 10	2 in x 4.25 in	Shade 10
901-932-108-10	Shade 10	4.5 in x 5.25 in	Shade 10
901-932-108-11	Shade 11	4.5 in x 5.25 in	Shade 11

Sweat Bands




Headgear Sweatbands

Features:

- Individually packaged.
- Hook & loop closure allows the fit onto most major brand headgear.
- Sweat absorbent air cushioned layer lined with 100% fleece cotton.

Strap Type: Hook and Loop

SKU	Color	Material
101-SB320V	Orange	Fleece Cotton

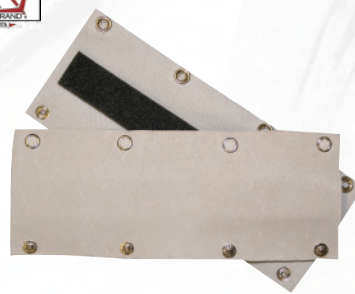

Leather Sweatbands

Features:

- Individually packaged.
- Snaps on any headgear.
- Absorbent air cushioned layer lined with 100% fleece cotton.

Material: Cowhide

SKU	Color
101-SB700	Bucktan
101-SB701	Tan



Wool Sweatbands


Features:

- Head gear pad.
- Soft and durable.
- Snaps on any headgear.
- Non-corrosive metal snaps.

Material: Sheep's Wool

Strap Type: Metal Snaps

SKU	Color	Quantity
101-SB888	Tan	1 Sweatband per Pack
101-SB888P	Tan	2 Sweatbands per Pack



Headgear Sweatbands

Features:

- Air cushioned, sweat absorbing layer surrounded by 100% fleecy cotton cover.
- Flame retardant for industrial use.
- Hook & loop closure allows the fit onto most major brand headgear.

Material: FR Fleece Cotton

SKU	Used With
902-SB310V	Non-Suspension Headgear
902-SB340	Suspension Headgear

Winter Liners & Hoods



Arctic Jr. Winter Liners

Features:

- Cold weather protection.
- Flame retardant treated.
- Fits all standard headgear.

Style: Extra Large Neck Flap

Color: Blue

Fastening Method: Neck Flap

Climate Range: Severe Cold

SKU	Material	Lining
101-600	Twill	Sheep Thermal Lining



Winter Liners

Features:

- Keep safe and warm, with sturdy winter liners that provide cold weather protection.
- Treat with flame retardant coating for extra safety.
- Fits all standard headgear.

Resistance: Cold Weather

SKU	Material	Lining	Climate Range
101-100F	Stretch Quilted	Red Fleece	Mild to Moderate Cold
101-130F	Twill	Red Fleece	Mild to Moderate Cold
101-140F	Twill	Orange Polyfiber/Cotton	Moderate Cold
101-150F	Polar Fleece	Unlined	Mild Cold
101-160F	Polar Fleece	Polar Fleece	Mild Cold
101-220EL	Twill	Sheep Thermal Lining	Moderate Cold
101-60F	Single layer denim	Napped Cotton	Mild Cold
101-700	Twill	Sheep Thermal Lining	Severe Cold

Hand Pads & Warmers



Back Hand Pads

Features:

- Sturdy back hand pad protects the back of welder's glove from sparks and spatter.
- Increases life of welding gloves.
- Sewn and riveted for durability and comfort.

Material: Aluminized Fiberglass

Closure Type: Elastic Strap; High-temperature Kevlar® Strap

SKU	Length	Width	Style
902-BACK-HAND-1	7 in	5-1/2 in	Single Layer
902-BACK-HAND-2	7 in	5-1/2 in	Double Layer

Gloves



Cotton Canvas Double-Palm Gloves

Features:

- Natural cotton canvas keeps hands cool and protected.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Clute cut provides a roomy fit and straight thumb increases comfort in closed-fisted work.
- Double palm provides additional weight, durability, and protection.
- Nap-in finish offers greater durability due to its higher abrasion resistance.
- Multi-purpose glove used for light protection.

SKU	Size Group
101-1050	Large



Cotton/Polyester Corded Double-Palm Gloves

Features:

- Cotton/polyester construction is breathable and decreases hand fatigue.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Clute cut provides a roomy fit and straight thumb increases comfort in closed-fisted work.
- Double palm provides additional weight, durability, and protection.
- Nap-in finish offers greater durability due to its higher abrasion resistance.
- Multi-purpose glove used for light protection.

SKU	Size Group
101-1060	Large



Premium Grade Cotton Canvas Single-Palm Gloves

Features:

- Natural cotton canvas keeps hands cool and protected.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Clute cut provides a roomy fit.
- Straight thumb increases comfort in closed-fisted work.
- Multi-purpose fabric gloves used for light protection.

SKU	Size Group
101-1110	Large



Premium Grade Canvas Dotted Gloves


Features:

- Natural cotton canvas keeps hands cool and protected.
- Knit wrist helps prevent dirt and debris from entering glove.
- Clute cut provides a roomy fit.
- Straight thumb increases comfort in closed-fisted work.
- PVC dot grip on palm, thumb, and forefinger.

SKU	Size
101-1090	Mens

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Quality Grain Cowhide Leather Driver Gloves

Features:

- Color coded fabric hem.
- Quality leather for comfortable and reliable protection.
- Straight thumb construction is ideal for closed fist work.

Lining: Unlined

SKU	Size Group
101-4000S	Small
101-4000M	Medium
101-4000L	Large
101-4000XL	X-Large



Standard Grain Cowhide Leather Driver Gloves

Features:

- Color-coded cotton hem for easy size identification.
- Weltd seams on middle fingers for added strength.
- Keystone thumb construction provides flexibility and comfort.

Lining: Unlined

SKU	Size Group
101-4015S	Small
101-4015M	Medium
101-4015L	Large
101-4015XL	X-Large



Standard Grain Pigskin Driver Gloves

Features:

- More porous leather for better breathability.
- Returns to original softness after becoming wet from application or perspiration.
- Shirred elastic wrist helps keep dirt and debris out of the glove.
- Color coded cotton hem makes it easy to identify size.

Lining: Unlined

SKU	Size Group	Style
101-4900M	Medium	Shirred Elastic Back; Straight Thumb
101-4800L	Large	Keystone Thumb; Shirred Elastic Back
101-4900L	Large	Shirred Elastic Back; Straight Thumb
101-4800XL	X-Large	Keystone Thumb; Shirred Elastic Back
101-4900XL	X-Large	Shirred Elastic Back; Straight Thumb



High Heat Wool-Lined Fiberglass Gloves

Features:

- Good abrasion resistance.
- Lined with heat-resistant 100% wool.

Lining: Wool

Temp Range: 750° F - 900° F

SKU	Size Group
101-FG-37WL	Large



High Heat Wool-Lined Kevlar® Gloves

Features:

- Superior abrasion resistance.
- Lined with heat-resistant 100% wool.

Lining: Wool

Temp Range: 650° F - 800° F

SKU	Size Group
101-K-37WL	Large



High Heat Wool-Lined Kevlar® Mittens

Features:

- Superior abrasion resistance.
- Lined with heat-resistant 100% wool.

Lining: Wool

Temp Range: 650° F - 800° F

SKU	Size Group	Color
101-K-28WL	Large	Yellow
101-K-38WL	Large	Yellow/Grey



High Heat Wool-Lined Fiberglass Mittens

Features:

- Good abrasion resistance.
- Lined with heat-resistant 100% wool.

Lining: Wool

Temp Range: 750° F - 900° F

SKU	Size Group
101-FG-28WL	Large



Heavy Weight Cotton Jersey Gloves

Features:

- Cotton construction is breathable and decreases hand fatigue.
- Gunn cut pattern delivers excellent durability, wear and comfort, especially for heavier gloves.
- Straight thumb increases comfort in closed-fisted work.
- Slip-on cuff allows for easy on and off.
- Heavy weight is excellent for cold applications.
- Jersey lining is soft, warm, flexible, and stretchy.
- Used for light protection in warehousing, farming, and automotive industry.

Lining: 100% Cotton Fleece

SKU	Size Group	Material
101-1250	Large	100% Cotton



Standard Weight Jersey Gloves

Features:

- Regular weight.
- Soft, comfortable jersey for general duty and light abrasion applications.

Lining: Unlined

SKU	Size Group
101-1200	Large



Cowhide Leather Palm Gloves

Features:

- Durable split cowhide leather palm, index finger, fingertips and knuckle strap.
- Safety cuff provides extra protection where you need it most.

Lining: Unlined

SKU	Size Group
101-2100	Large



Leather Palm Gloves

Features:

- Color coded cotton hem for easy size identification.
- Double palm covers entire palm, index finger and thumb.
- Leather knuckle strap provides extra protection where you need it most.
- An economical full feature standard split cowhide leather palm gloves are a great protection and comfort in general duty applications.

Lining: Cotton

SKU	Size Group	Material
101-2000	Large	Split Cowhide; Standard Shoulder Leather
101-2300	Large	Canvas Back; Premium Select Shoulder Leather; Split Cowhide



Split Cowhide Work Gloves

Features:

- Safety cuff provides extra protection where you need it most.
- Standard Work Glove.
- Excellent durability.

Lining: Unlined

SKU	Size Group	Style
101-1775	Large	Standard; Gunn-Straight Thumb
101-WG-999	Large	Standard; Gunn-Wing Thumb



PVC-Coated Gloves

Features:

- PVC exterior is chemically resistant to oil, grease, acid and solvents.
- Provides moderate abrasion resistance.
- Single dipped.

Lining: Cotton-Knit Interlock

SKU	Size Group
101-7005	Large



Standard Weight Seamless String-Knit Gloves

Features:

- Seamless cotton/polyester knit shell is comfortable and flexible.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Reversible design allows replacing one glove at a time, rather than pairs.
- Can be used as a glove liner.

SKU	Size Group
101-6700	Large



PVC-Coated Gloves

Features:

- PVC exterior is chemically resistant to oil, grease and acids.
- Soft jersey lining offers cushioning and moderate insulation.

Lining: Jersey

SKU	Size Group	Style
101-7300	Large	Rough Grip
101-7400	Large	Sandpaper Grip




Medium Weight Seamless String-Knit Gloves

Features:

- Seamless knit shell is comfortable and flexible.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Single-sided PVC dots provide enhanced grip and extra cut and abrasion resistance.
- Used in warehousing and package handling, general assembly, light-duty general work situations, construction, and bottle handling.

SKU	Size Group
101-6710	Large



Capeskin Welding Gloves

Features:

- Handy gloves are made from durable capeskin material for extended wear comfort.
- They effectively resist heat and abrasion.
- Excellent dexterity, fit, and flexibility.

Lining: Unlined

SKU	Size Group
902-10TIG-L	Large
902-10TIG-XL	X-Large



Capeskin Welding Gloves

Features:

- Weld well, with sturdy TIG welding gloves that feature a welted thumb stress point.
- Fully Kevlar® sewn for additional protection.
- Gloves offer excellent dexterity, fit and flexibility.

Lining: Unlined

SKU	Size Group
902-120TIG-S	Small
902-120TIG-M	Medium
902-120TIG-L	Large
902-120TIG-XL	X-Large



Leather Welding Gloves

Features:

- Welding is hard work—luckily, sturdy leather welding gloves provide superior heat protection.
- Strong, one-piece palm has no exposed seams.
- Sewn with heat resistant Kevlar® thread for additional protection.
- Features absorbent cotton sock lining for added comfort.
- Reinforced thumb and palm.

Lining: Full Cotton Sock

SKU	Size Group	Material
902-3030	Large	Leather



COMFOflex® Premium Leather Welding Gloves

Features:

- Heat and sweat absorbant COMFOflex® lining.
- Fully welted seams and 4-ply Kevlar® sewn.
- Next level heat resistance, with improved abrasion resistance.
- Excellent comfort, protection, and durability.

SKU	Size Group	Lining	Color
902-100GC	Large	Full Sock	Russet
902-10-2000	Large	COMFOflex®	Buck Tan



Economy Welding Gloves

Features:

- Provides excellent heat protection.
- One piece palm has no exposed seams.
- Cotton sock lining absorbs perspiration.
- Heavy full leather gauntlet cuffs.
- Available in ladies sizes.

Lining: Full Sock

SKU	Size Group
902-3000	Large



Leather Welder's Gloves

Features:

- Excellent heat protection.
- One-piece palm has no exposed seams.

Lining: Full Sock

SKU	Size Group
902-2006C	Large



High Heat Welding Gloves

Features:

- Excellent choice for heavy duty MIG, TIG, Plasma, gas welding and cutting applications.
- Industrial grade aluminized backing reflects 95% of radiant heat.
- 100% of stitching is done with 4-ply Kevlar® thread.
- Sweat absorbent palm.

Lining: COMFOflex®

SKU	Size Group
902-650H-XL	X-Large



Premium Welding Gloves


Features:

- Industrial and warehouse work gloves for many applications.
- Excellent comfort, protection, and durability.
- Kevlar Sewn.

SKU	Size Group	Lining	Color
902-850GC-M	Medium	Unlined Reversed Grain	Gold
902-850GC	Large	Unlined Reversed Grain	Gold
902-B-20GC	Large	Full Sock	Blue
902-850GC-XL	X-Large	Unlined Reversed Grain	Gold

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Quality Welding Gloves

Features:

- Heat and sweat absorbent COMFOflex® lining.
- Standard heat and improved abrasion resistance.
- Excellent comfort, protection and durability.
- Fully welted seams and 4-ply Kevlar® sewn.

Lining: COMFOflex®

SKU	Size Group
902-700GC-L	Large



Specialty Welding Gloves

Features:

- Soft Grade A top grain pigskin.
- Excellent resistance to soil, moisture, oil and weather.
- Designed for standard heat resistance, with improved abrasion resistance.

Lining: Flame Retardant

SKU	Size Group
902-250GC	Large



Split Cowhide Front Welding Gloves

Features:

- Protect your hands properly—wear sturdy split cowhide gloves with aluminized back.
- Welting on all exposed seams and finger tips for added durability.
- Full sock lining for increased comfort.

Lining: Full Sock

SKU	Size Group
902-42AL	Large



Split Cowhide Kevlar® Welding Gloves

Features:

- Strong, 5-ply split cowhide gloves are sewn with Kevlar® for added strength.
- Split cowhide welding glove with Gunn-Wing thumb and full sock lining for comfort.
- Heat- and abrasion-resistant.

Lining: Full Sock

SKU	Size Group
902-18GC	Large



Split Cowhide Welding Gloves

Features:

- Quality leather construction.
- Fully welted seams and Kevlar® sewn.
- Designed for standard heat resistance, with improved abrasion resistance.
- Excellent comfort, protection, and durability.

Lining: Full Sock

SKU	Size Group	Style	Color
902-300GC	Large	Standard; Wing Thumb	Blue
902-20GC	Large	Standard; Gunn-Wing Thumb	Russet



TIG Welding Gloves

Features:

- Grain Pigskin.
- Gunn Pattern.
- Straight Thumb.
- 3/4 Thumbstrap.
- 4 Split Leather Cuff.
- Unlined.

Cuff Style: Split

SKU	Size Group
902-20TIG-L	Large



Welding Gloves

Features:

- Heat and abrasion resistance.
- Fully Kevlar® sewn.
- Durable and flexible.

Lining: Full Sock

SKU	Size Group	Includes
902-10-2054	Large	Leather
902-4200AL	Large	Additional Back Padding



Welding Mittens

Features:

- Sturdy welding mittens are designed with welted vulnerable seams.
- Full mitt pattern allows for better insulation and more protection.
- Reinforced with Kevlar® thread.

Lining: Fleece

SKU	Size Group
902-125MC	Large

Sorbents



Absorbent SOCs

Features:

- Moldable SOCs wrap around machinery and conform to uneven surfaces to prevent leaks from reaching walkways.
- Highly versatile, grey absorbents pick up water-based, petroleum-based and non-aggressive, chemical fluids.
- Gray color masks spills and stains, helping you resist the urge to pick up the absorbent before it is fully saturated.
- Made of all-purpose polypropylene suitable for most industrial applications.

Absorption: 81 gal

SKU	Length	Width
103-AB-SOCK	42 in	3 in



Oil-Only Sorbent Pads

Features:

- White absorbents pick up petroleum-based fluids, paints and non-water soluble chemicals while repelling water - great for indoor & outdoor use.
- Meltblown polypropylene absorbents feature economical, single-ply construction.
- Perforations provide cost control and reduce waste by allowing you to use only what you need.

SKU	Length	Width	Absorption
103-AB-BPO100	17 in	15 in	20.5 gal
103-AB-BPO200	17 in	15 in	34 gal
103-AB-BPO500	17 in	15 in	17 gal



Oil-Only Sorbent Rolls

Features:

- White absorbents pick up petroleum-based fluids, paints and non-water soluble chemicals while repelling water - great for indoor & outdoor use.
- Heavy weight - specifically designed for continuous leaks and larger spills so you use less material.
- Meltblown polypropylene absorbents feature economical, single-ply construction.
- Perforations provide cost control and reduce waste by allowing you to use only what you need.

Absorption: 24 gal

SKU	Length	Width
103-AB-BR0120	120 ft	30 in



Universal Sorbent Pads

Features:

- Highly versatile, grey absorbents pick up water-based, petroleum-based and non-aggressive, chemical fluids.
- Meltblown polypropylene absorbents feature economical, single-ply construction.
- Perforations provide cost control and reduce waste by allowing you to use only what you need.

SKU	Length	Width	Absorption
103-AB-BPU100	17 in	15 in	20.5 gal
103-AB-BPU200	17 in	15 in	34 gal
103-AB-BPU500	17 in	15 in	17 gal



Universal Sorbent Rolls


Features:

- Highly versatile, grey absorbents pick up water-based, petroleum-based and non-aggressive, chemical fluids.
- Heavy weight - specifically designed for continuous leaks and larger spills so you use less material.
- Meltblown polypropylene absorbents feature economical, single-ply construction.
- Perforations provide cost control and reduce waste by allowing you to use only what you need.

Absorption: 38 gal

SKU	Length	Width
103-AB-BRU120	150 ft	30 in

Safety Fences



Safety Fences

Features:

- Super high strength.
- Safe with no sharp edges.
- UV stabilized.
- Highly visible orange color.
- Easy to install, handle, or relocate.

SKU	Height	Length	Style
101-ML-500	4 ft	100 ft	Straight Grid
101-FEN1009	4 ft	100 ft	Chain-link

Safety Tapes



Economy Barrier Tape

Features:

- Sturdy safety tape.
- Repeat wording clearly identifies hazard.
- Bright colors and Bolder Print to attract attention.
- Durable, yet easily disposable.

Width: 3 in

Length: 1000 ft


Material: Polyethylene

SKU	Depicted Text	Color
101-R10003	Danger	Red
101-Y10003	Caution	Yellow

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Outfits



G250 Series Cutting and Welding Outfits

Features:

- Built-in flashback and check valves for safety.
- Patented high contrast gauges.
- Color-coded knobs on regulators.
- Features G250 regulator.

SKU	Gas Type	Cutting Cap.	Welding Range	Includes
900-0384-2705	Acetylene	3/8 in to 5 in	3/8 in - 3 in	CA270-V Cutting Attachment; WH270FC-V Welding Handle; 0-3-101 Cutting Tip; 0-UM-250 Welding Nozzle; G250-150-540 Oxygen Regulator; G250-15-510 Fuel Gas Regulator
900-0384-2706	Acetylene; Oxygen	3/8 in to 5 in	3/8 in - 3 in	CA270-V Cutting Attachment; WH270FC-V Welding Handle; 0-3-101 Cutting Tip; 0-UM-250 Welding Nozzle; G250-150-540 Oxygen Regulator; G250-15-510 Fuel Gas Regulator; 3/16 in x 20 ft RM Hose; Goggles; Striker
900-0384-2707	Acetylene; Propane; Propylene; Natural Gas	1/2 in to 5 in with Optional Tips	5/64 in - 1.25 in with Optional Nozzles	Torch Handle with Built-In Check Valves; (1) Cutting Attachment; (1) Welding Nozzle; RM Grade Hose 20 ft x 3/16 in; G250-15-300 Fuel Gas Regulator; G250-150-540 Oxygen Regulator; Striker; Soft-Sided Goggles



G350 Series Cutting and Welding Outfits

Features:

- Built-in flashback and check valves for safety.
- Patented high contrast gauges.
- Color-coded knobs on regulators.
- Features G350 regulator.

SKU	Gas Type	Cutting Cap.	Welding Range	Includes
900-0384-2703	Acetylene; Oxygen	3/8 in to 6 in	- 3 in	CA370-V Cutting Attachment; WH370FC-V Welding Handle; 1-1-101 Cutting Tip; 2-UM-350 Welding Nozzle; G350-150-540 Oxygen Regulator; G350-15-510 Fuel Gas Regulator
900-0384-2704	Acetylene; Oxygen	3/8 in to 6 in	- 3 in	CA370-V Cutting Attachment; WH370FC-V Welding Handle; 1-1-101 Cutting Tip; 2-UM-350 Welding Nozzle; G350-150-540 Oxygen Regulator; G350-15-510 Fuel Gas Regulator; 1/4 in x 25 ft RM Hose; Goggles; Striker
900-0384-2708	Acetylene; Natural Gas; Propane	3/8 in to 6 in with Optional Tips	5/64 in - 3 in with Optional Nozzles	Torch Handle with Built-In Check Valves; (1) Cutting Attachment; (1) Welding Nozzle; RM Grade Hose 25 ft x 1/4 in; G350-15-300 Series Fuel Gas Regulator; G250-150-540 Series Oxygen Regulator; Striker; Soft-Sided Goggles

Tips & Nozzles



Airco®/Concoa® Style 1-Pc Acetylene Cutting Tips - 144 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for general hand or machine cutting.
- Fits 4700, 4800, 5700, 5800, 1100, 3000, 9000, 9700 torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-144-0	0	Acetylene
900-144-00	00	Acetylene
900-144-1	1	Acetylene
900-144-2	2	Acetylene
900-144-3	3	Acetylene
900-144-4	4	Acetylene
900-144-5	5	Acetylene
900-144-6	6	Acetylene-Oxygen



Airco®/Concoa® Style 1-Pc Acetylene Cutting Tips - 164 Series

Features:

- One-piece tip for acetylene-oxygen.
- Very heavy preheat for general cutting.
- Also for use in cutting cast iron and stainless steel.
- Fits 4700, 4800, 5700, 5800, 1100, 3000, 9000, 9500, 9700 torches.

Material: Copper

Gas Type: Acetylene

SKU	Tip Size Symbol
900-164-0	0
900-164-00	00
900-164-1	1
900-164-2	2
900-164-3	3
900-164-4	4
900-164-5	5
900-164-6	6



Airco®/Concoa® Style 1-Pc Acetylene Gouging Tips - 183 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for grooving, gouging, and removing welds.
- Fits 3700, 4700, 4800, 5700, 5800, 1100, 3000, 9000, 9500, 9700 torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-183-6	6	Acetylene-Oxygen
900-183-8	8	Acetylene



Airco®/Concoa® Style 2-Pc Propane/Natural Gas Cutting Tips - 261 Series

Features:

- Two-piece tip for propane-oxygen or natural gas-oxygen.
- Heavy preheat for general hand cutting.
- Fits 4700, 4800, 5700, 5800, 1100, 3000, 9000, 9500, 9700, 2900 torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-261-1	1	Propane-Oxygen; Natural Gas-Oxygen
900-261-2	2	Propane; Natural Gas
900-261-3	3	Propane; Natural Gas
900-261-4	4	Propane; Natural Gas



Harris® Style 1-Pc Acetylene Cutting Tips - 6290 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for general hand cutting.
- Fits 42, 62, 72, 72A, 73, 73A, 142, 880, 85 torches.

Material: Copper

Gas Type: Acetylene

SKU	Tip Size Symbol
900-6290-0	0
900-6290-00	00
900-6290-1	1
900-6290-2	2
900-6290-3	3
900-6290-4	4
900-6290-5	5
900-6290-6	6



Harris® Style 2-Pc Propane/Natural Gas Cutting Tips - 6290-NFF Series

Features:

- Two-piece tip for propane-oxygen or natural gas-oxygen.
- Heavy preheat for general cutting.
- Fits 42, 49AF, 49F, 62, 85, 72, 73, 142, 880 series torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-6290NFF-2	2	Propane; Natural Gas
900-6290NFF-3	3	Propane; Natural Gas
900-6290NFF-4	4	Propane; Natural Gas
900-6290NFF-5	5	Acetylene-Oxygen



Harris® Style 2-Pc Propane/Natural Gas Cutting Tips - 6290-NX Series

Features:

- Two-piece tip for propane-oxygen or natural-gas oxygen.
- Medium preheat for general cutting.
- Fits 42, 49AF, 49F, 62, 85, 72, 73, 142, 880 series torches.

Material: Copper

Gas Type: Propane; Natural Gas

SKU	Tip Size Symbol
900-6290NX-0	0
900-6290NX-00	00
900-6290NX-1	1
900-6290NX-2	2
900-6290NX-3	3
900-6290NX-4	4
900-6290NX-5	5
900-6290NX-6	6



Oxweld® Style 1-Pc Acetylene Cutting Tips - 1502 Series

Features:

- One-piece general cutting for acetylene-oxygen.
- Medium preheat for hand or machine cutting.
- Fits C-32, CW-23, C-77, CW-500 hand torches and C-37, C-39, C-58 machine torches.

SKU	Tip Size Symbol	Material	Gas Type
900-1502-10	10	Copper; Stainless Steel	Acetylene-Oxygen
900-1502-2	2	Copper	Acetylene
900-1502-4	4	Copper	Acetylene
900-1502-6	6	Copper	Acetylene



Purox® Style 1-Pc Acetylene Cutting Tips - 4202 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for general cutting.
- Fits CW-200, CW-202, CW-250, Type E torches, C-84, C-205 machine torch, CW-300 torches.

Material: Copper

Gas Type: Acetylene

SKU	Tip Size Symbol
900-4202-11	11
900-4202-2	2
900-4202-3	3
900-4202-4	4
900-4202-5	5
900-4202-7	7
900-4202-9	9



Smith® Style 1-Pc Acetylene Cutting Tips - MC-12 Series

Features:

- One-piece general cutting tip for acetylene-oxygen.
- Medium duty hand cutting.
- Fits cutting assemblies Pipeliner MC505, MC509, Airliner AC305, AC309.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-MC12-0	0	Acetylene
900-MC12-1	1	Acetylene
900-MC12-2	2	Acetylene
900-MC12-3	3	Acetylene-Oxygen



Smith® Style 1-Pc Acetylene Cutting Tips - SC-12 Series

Features:

- One-piece general cutting tip for acetylene-oxygen.
- Medium preheat for hand or machine cutting.
- Fits Silver Star (000-5), cutting torches Tuf-Tony, Silver Star (000-7).
- Fits machine torches SC770, SC771, SC780A, SC782A (000-7).

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-SC12-0	0	Acetylene
900-SC12-1	1	Acetylene
900-SC12-2	2	Acetylene
900-SC12-3	3	Acetylene
900-SC12-4	4	Acetylene
900-SC12-5	5	Acetylene
900-SC12-6	6	Acetylene-Oxygen
900-SC12-7	7	Acetylene-Oxygen



Smith® Style 2-Pc Propane/Natural Gas Cutting Tips - SC-50 Series

Features:

- Two-piece general cutting tip for Propane-Oxygen or Natural Gas-Oxygen.
- Heavy preheat for hand and machine cutting.
- Fits torches Silver Star, Pipe Welders Special (00-5), Tuf-Tony (00-9).
- Fits machine torches SC770, SC771 (0-6), SC780A, SC781A, SC782A (00-9).

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-SC50-2	2	Propane; Natural Gas
900-SC50-3	3	Propane-Oxygen; Natural Gas-Oxygen



Victor® Style 1-Pc Acetylene Cutting Tips - 1-101 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for general hand and machine cutting.
- Fits 2460, CA 1060, ST, SST, 1400C machine torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-1-101-0	0	Acetylene; Oxygen
900-1-101-00	00	Acetylene; Oxygen
900-1-101-000	000	Acetylene
900-1-101-1	1	Acetylene; Oxygen
900-1-101-2	2	Acetylene; Oxygen
900-1-101-3	3	Acetylene; Oxygen
900-1-101-4	4	Acetylene; Oxygen
900-1-101-5	5	Acetylene
900-1-101-6	6	Acetylene
900-1-101-7	7	Acetylene-Oxygen



Victor® Style 1-Pc Acetylene Cutting Tips - 3-101 Series

Features:

- One-piece tip for acetylene-oxygen.
- Medium preheat for general hand cutting.
- Fits CA 1260, CA 1350, C 1450, CA 2060, CA 2460, CST 800, C 1400 torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-3-101-0	0	Acetylene; Oxygen
900-3-101-00	00	Acetylene
900-3-101-000	000	Acetylene
900-3-101-1	1	Acetylene
900-3-101-2	2	Acetylene
900-3-101-3	3	Acetylene
900-3-101-4	4	Acetylene
900-3-101-5	5	Acetylene-Oxygen



Victor® Style 1-Pc Acetylene Gouging Tips - 1-118 Series

Features:

- One-piece tip for acetylene-oxygen.
- For gouging, scarfing, and deseaming.
- Fits 2460, CA 1060, ST, SST, 1400C machine torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-1-118-0	0	Acetylene
900-1-118-2	2	Acetylene
900-1-118-4	4	Acetylene
900-1-118-6	6	Acetylene-Oxygen
900-1-118-8	8	Acetylene-Oxygen



Victor® Style 2-Pc Propane/Natural Gas Cutting Tips - 3-GPN Series

Features:

- Two-piece tip for propane-oxygen or natural gas-oxygen.
- Medium preheat for general hand or machine cutting.
- Fits CA 1260, CA 1350, C 1450, CA 2060, CA 2460, CST 800, C 1400 torches.

SKU	Tip Size Symbol	Material	Gas Type
900-3-GPN-0	0	Copper	Propane; Natural Gas
900-3-GPN-1	1	Copper	Propane; Natural Gas
900-3-GPN-2	2	Copper	Propane; Natural Gas
900-3-GPN-3	3	Copper	Propane; Natural Gas
900-3-GPN-4	4	Brass; Copper	Propane-Oxygen, Natural Gas-Oxygen



Victor® Style 2-Pc Propane/Natural Gas Cutting Tips - GPN Series

Features:

- Two-piece tip for propane-oxygen or natural gas-oxygen.
- Medium preheat for hand and machine cutting.
- Fits 2450, CA 1060, CAN 1060, ST, SST, STN, 1400C, machine torches.

Material: Copper

SKU	Tip Size Symbol	Gas Type
900-GPN-0	0	Propane; Natural Gas
900-GPN-00	00	Propane; Natural Gas
900-GPN-1	1	Propane; Natural Gas
900-GPN-2	2	Propane; Natural Gas
900-GPN-3	3	Propane; Natural Gas
900-GPN-4	4	Propane; Natural Gas
900-GPN-5	5	Propane; Natural Gas
900-GPN-6	6	Propane; Natural Gas
900-GPN-8	8	Propane-Oxygen, Natural Gas-Oxygen



Victor® Style Acetylene Heating Nozzles with Tips - MFA Series

Features:

- Heating tip for acetylene-oxygen, propylene-oxygen, or MapPro-oxygen.
- Multi-flame nozzle for preheating and straightening.
- Fits 300 series torches.
- For MFA-12 and MFA-15 use HD 310C torch with 3/8 hose manifold if acetylene withdrawal rate exceeds 1/7 cylinder content per hour.

Material: Copper

Gas Type: Acetylene; MapPro; Propylene

SKU	Tip Size Symbol
900-MFA-8	8



Victor® Style Acetylene/Propylene Nozzles with Heating Tips - MFA-1 Series

Features:

- Heating tip for acetylene-oxygen or propylene-oxygen.
- Multi-flame nozzle for preheating and straightening.
- Fits 300 series torches.

Material: Copper

Gas Type: Acetylene; Propylene

SKU	Tip Size Symbol
900-MFA-1-6	6

Welding Hoses



Grade R Single-Line Welding Hoses

Features:


- High quality Grade R single-line welding hoses.
- Grade R welding hoses are designed for carrying acetylene or oxygen to welding equipment.
- Green hose carries oxygen to welding equipment.
- Red hose carries acetylene.
- Hose cover resists oils.

Pressure: 200 PSI

SKU	Grade	Length	Hose I.D.	Gas Type
907-3/16X1-RED-12-AA	R	12 ft	3/16 in	Acetylene
907-3/16X1-RED-25-AA	R	25 ft	3/16 in	Acetylene
907-1/2X2-GRN-100-CC	R	100 ft	1/2 in	Oxygen
907-1/2X2-RED-RL	R	500 ft	1/2 in	Acetylene
907-3/8X1-GRN	R	700 ft	3/8 in	Oxygen
907-1/4X2-RED-RL	R	750 ft	1/4 in	Acetylene
907-5/16X1-GRN	R	750 ft	5/16 in	Oxygen
907-3/16X1-GRN-RL	R	800 ft	3/16 in	Oxygen
907-3/16X1-RED-RL	R	800 ft	3/16 in	Acetylene
907-1/4X1-GRN-RL	R	800 ft	1/4 in	Oxygen
907-1/4X1-RED-RL	R	800 ft	1/4 in	Acetylene
907-1/2X2-GRN-50-CC	T	Custom	1/2 in	Fuel Gases

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.




Grade R Twin-Line Welding Hoses

Features:

- High quality Grade R twin-line welding hoses.
- Green hose carries oxygen to welding equipment.
- Red hose carries acetylene.
- Hose cover resists oils.

Pressure: 200 PSI

SKU	Grade	Length	Hose I.D.	Gas Type
907-LB1/4-TWIN-6-BB	R	6 ft	1/4 in	Acetylene; Oxygen
907-LB123	R	12.5 ft	3/16 in	Acetylene; Oxygen
907-LB123-A-A	R	12.5 ft	3/16 in	Acetylene; Oxygen
907-LB123-A-B	R	12.5 ft	3/16 in	Acetylene; Oxygen
907-LB1/4-TWIN-12.5-BB	R	12.5 ft	1/4 in	Acetylene; Oxygen
907-LB253-A-B	R	25 ft	3/16 in	Acetylene; Oxygen
907-LB253	R	25 ft	3/16 in	Acetylene; Oxygen
907-LB253-A-A	R	25 ft	3/16 in	Acetylene; Oxygen
907-LB254	R	25 ft	1/4 in	Acetylene Only
907-LB258	R	25 ft	3/8 in	Acetylene; Oxygen
907-LB503	R	50 ft	3/16 in	Acetylene; Oxygen
907-LB504	R	50 ft	1/4 in	Acetylene Only
907-LB508	R	50 ft	3/8 in	Acetylene; Oxygen
907-LB1003	R	100 ft	3/16 in	Acetylene; Oxygen
907-LB1004	R	100 ft	1/4 in	Acetylene Only
907-LB1008	R	100 ft	3/8 in	Acetylene; Oxygen
907-LB3/8-TWIN	R	700 ft	3/8 in	Acetylene Only
907-LB3/16-TWIN-RL	R	800 ft	3/16 in	Acetylene; Oxygen
907-LB1/4-TWIN-RL	R	800 ft	1/4 in	Acetylene; Oxygen



Grade T Single-Line Welding Hoses

Features:

- High quality Grade T single-line welding hoses.
- Grade T welding hoses are designed for carrying fuel gases or oxygen to welding equipment.
- Green hose carries oxygen to welding equipment.
- Red hose carries fuel gases.
- Hose cover resists flames and oils.

Pressure: 200 PSI

SKU	Grade	Length	Hose I.D.	Gas Type
907-T1/4X2-RED-10-BB	T	10 ft	1/4 in	Fuel Gases
907-T3/8X1-RED-25-BB	T	25 ft	3/8 in	Fuel Gases
907-T3/8X1-RED-50-BB	T	50 ft	3/8 in	Fuel Gases
907-T3/8X1-RED-100-BB	T	100 ft	3/8 in	Fuel Gases
907-T1/4X2-RED-100-BB	T	100 ft	1/4 in	Fuel Gases
907-T1/4X2-RED	T	700 ft	1/4 in	Fuel Gases
907-T3/8X1-GRN	T	700 ft	3/8 in	Oxygen
907-T3/8X1-RED	T	700 ft	3/8 in	Fuel Gases
907-T1/2X2-RED	T	700 ft	1/2 in	Fuel Gases



Grade T Twin-Line Welding Hoses

Features:

- High quality Grade T twin-line welding hoses.
- Green hose carries oxygen to welding equipment.
- Red hose carries fuel gases.
- Hose cover resists flames and oils.

Gas Type: Fuel Gases; Oxygen

Pressure: 200 PSI

SKU	Grade	Length	Hose I.D.
907-T123-A-B	T	12.5 ft	3/16 in
907-T123	T	12.5 ft	3/16 in
907-T3/16-TWIN-12.5	T	12.5 ft	3/16 in
907-T1700-12.5-BB	T	12.5 ft	1/4 in
907-T253-A-B	T	25 ft	3/16 in
907-T253	T	25 ft	3/16 in
907-T254	T	25 ft	1/4 in
907-T255	T	25 ft	5/16 in
907-T5/16-TWIN-25	T	25 ft	5/16 in
907-T258	T	25 ft	3/8 in
907-T503	T	50 ft	3/16 in
907-T504	T	50 ft	1/4 in
907-T5/16-TWIN-50	T	50 ft	5/16 in
907-T508	T	50 ft	3/8 in
907-T1/4-TWIN-75-BB	T	75 ft	1/4 in
907-T1003	T	100 ft	3/16 in
907-T1004	T	100 ft	1/4 in
907-T5/16-TWIN-100	T	100 ft	5/16 in
907-T1008	T	100 ft	3/8 in
907-TR3/16-TWIN-RL	T	700 ft	3/16 in
907-TR3/8-TWIN-RL	T	700 ft	3/8 in
907-TR5/16-TWIN-RL	T	750 ft	5/16 in
907-TR1/4-TWIN-RL	T	800 ft	1/4 in



Inert Gas Welding Hoses

Features:

- Inert gas single-line welding hose.
- Cover is resistant to abrasion, heat, mild chemicals, and ozone.

Hose I.D.: 1/4 in

Pressure: 200 PSI

SKU	Grade	Length	Gas Type
907-1/4X1-GRN-6-ARGON	IGF	6 ft	Argon
907-1/4X1-BLK-6-ARGON	IGF	6 ft	Argon
907-1/4X1-BLK-8-ARGON	IGF	8 ft	Argon
907-1/4X1-BLK-10-IWF	IWF	10 ft	Inert Gas
907-1/4X1-GRN-10-ARGON	IGF	10 ft	Argon
907-1/4X1-BLK-10-ARGON	IGF	10 ft	Argon
907-1/4X1-GRN-25-ARGON	IGF	25 ft	Argon
907-1/4X1-BLK-25-ARGON	IGF	25 ft	Argon
907-1/4X1-GRN-50-ARGON	R	50 ft	Argon
907-1/4X1-BLK-50-ARGON	IGF	50 ft	Argon
907-1/4X1-GRN-100-ARGON	IGF	100 ft	Argon
907-1/4X1-BLK-100-ARGON	IGF	100 ft	Argon
907-1/4X1-BLK-ARGON-RL	IGF	800 ft	Argon



Single Line Welding Hoses

Features:

- Open steam vulcanization curing process does not require pin pricking and offers improved cover and reinforcement adhesions for longer hose life.
- Superior ozone resistance.
- Non-staining coupling ensures that brass fitting will not discolor.
- Multiple length reels will be limited to max of 3 pcs and all pcs will be in 50 ft increments.
- Made in the USA


Pressure: 200 PSI

SKU	Grade	Length	Hose I.D.	Gas Type
907-3/8X50G	R	50 ft	3/8 in	Oxygen
907-3/8X2-RED	R	700 ft	3/8 in	Acetylene Only
907-1/2X2-GRN	R	700 ft	1/2 in	Oxygen

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Spark Lighter & Flints



Lightnin' Bug® Torch Lighters

Features:

- Multi-spark discharge.
- Ignites almost all industrial fuel gases, such as, oxy-acetylene, natural gas, propane, methane, and propylene.
- Never needs flints, batteries or recharging.

SKU
900-LIGHTNINBUG



SL-3F Spark Lighters

Features:

- Triple flint lighter.
- Consistent, reliable sparking.
- Long lasting.

SKU
900-SL-3F




SL-E Spark Lighters

Features:

- Single flint lighter.
- Consistent, reliable sparking.
- Long lasting.

SKU
900-SL-E

Tip Cleaners



Tip Cleaner Sets

Features:

- Constructed of stainless steel.
- Rust-proof.
- Tapered ends for easy cleaning.
- Includes case with file.

Used With: Welding Tips

SKU	Dia.	Size Group
900-KTC	0.014; 0.018; 0.021; 0.024; 0.028; 0.032; 0.035; 0.037; 0.039; 0.042; 0.048; 0.055; 0.062	#6 Thru #25
900-STC	0.014 in; 0.018 in; 0.021 in; 0.024 in; 0.028 in; 0.032 in; 0.035 in; 0.037 in; 0.039 in; 0.042 in; 0.048 in; 0.055 in; 0.062 in	6 to 26

Pressure Gauges



Pressure Gauges

Features:

- One-piece threaded polycarbonate lens.
- Cupped aluminum dial with white background and red and/or black markings.

Mounting: Bottom

Connection Size: 1/4 in NPT

SKU	Operating Pressure	Gauge Size
900-MIPSB230RL	30 psi	2 in
900-MIPSB2530RL	30 psi	2-1/2 in
900-MIPSB260	60 psi	2 in
900-MIPSB2560	60 psi	2-1/2 in
900-MIPSB2100	100 psi	2 in
900-MIPSB25100	100 psi	2-1/2 in
900-MIPSB2200	200 psi	2 in
900-MIPSB2400	400 psi	2 in
900-MIPSB25400	400 psi	2-1/2 in
900-MIPSB251000	1000 psi	2-1/2 in
900-MIPSB24000	4000 psi	2 in
900-MIPSB254000	4000 psi	2-1/2 in

Cutting & Burning Guides



Rap-Around Pipe Templates

Features:

- Has a tough edge to protect from fraying and splitting which extends the life of the product.
- Clear vinyl container for protection in between jobs.

SKU	Size Group	Width	Length	Pipe Capacity
900-RA150	Small	2-1/2 in	2 ft	1 in - 3 in
900-RA160	Large	4 in	4 ft	3 in - 6 in
900-RA170	Large	4 in	6 ft	3 in - 10 in
900-RA179	Large	4 in	9 ft	6 in - 16 in
900-RA177	X-Large	4 in	7 ft	4 in - 12 in
900-RA184	X-Large	4 in	Custom	Varies - Varies
900-RA187	X-Large	7 in	Custom	Varies - Varies

Cylinder Pliers & Wrenches



Box Tank Wrenches

Features:

- Heavy-duty forged steel box tank wrench.
- Designed for B & MC acetylene valves.

Material: Steel

SKU	Opening Size	Length
900-00W5	3/16 in	3-1/8 in



Tank Wrenches

Features:

- Forged tank wrenches fit most valve stems and gas connections.
- Socket-holes are deep, smooth, and precisely sized for solid connections.
- Larger handles for firm grip and better leverage.

Material: Steel

SKU	Opening Size	Length
900-W10	3/8 in	5.25 in
900-W20	3/8 in	5.96 in
900-W1013	7/8 in; 1 1/8 in	8-1/2 in
900-W250	9/32 in	5.96 in

Cylinder & Caps



Cylinder Caps

Features:


- Sturdy cylinder cap with outstanding thread quality.
- Easy and quick installation and removal.

SKU	Type	Gas Type
900-BSW-1956	Cylinder Cap; Coarse Thread	High Pressure
900-BSW-1957	Cylinder Cap; Fine Thread	High Pressure
900-BSW-1954	Cylinder Cap; Coarse Thread	Acetylene
900-BSW-1955	Cylinder Cap; Fine Thread	Acetylene

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Cylinder Cart Parts & Accessories



Gas Cylinder Holder

Features:

- Heavy-duty steel brace keeps gas cylinder firmly in place.
- Rubber padding reduces friction and provides reliable, tight grip.

Material: Steel

Width: 2 in

SKU	Dia
900-CYH-110	10 in - 10 3/4 in
900-CYH-108	8 in - 8-3/4 in
900-CYH-112	12 in - 13 in
900-CYH-185	8 1/2 in - 9 in
900-CYH-104	3 7/8 in - 4 3/8 in
900-CYH-109	9 in - 9-3/4 in
900-CYH-114	14 1/2 in - 15 1/4 in
900-CYH-145	5 1/3 in - 5 3/4 in
900-CYH-106	6-1/2 in - 7-1/4 in
900-CYH-105	5 3/4 in - 6 3/8 in
900-CYH-107	7-1/4 in - 8 in

Cylinder Carts & Trucks



Cylinder Trucks

Features:

- Perfect for hobbyists, plumbers, maintenance departments, and almost any application with hard surface floors.
- Sturdy frame design provides maximum strength and considerable stability.
- Comes with retaining chains.

Width: 32-1/2 in

Height: 44-1/2 in

Acetylene Cylinder: 12-1/2 in

Oxygen Cylinder: 12.5 in

SKU	Load Cap.
900-CTR-14	440 lb



MIG Welding Carts

Features:

- Designed for storage and transport of MIG Welders, cylinders, cables and other welding accessories.
- Heavy-duty steel construction.
- Corrosion-resistant powder coating.

Width: 12-1/4 in

Height: 33 in

Oxygen Cylinder: 10-1/4 in

SKU	Load Cap.
900-WC-1228	125 lb



Wheeled Cylinder Trucks

Features:

- Perfect for hobbyists, plumbers, maintenance departments, and almost any application with hard surface floors.
- Sturdy frame design provides maximum strength and considerable stability.
- Metal rimmed solid rubber tires offer better durability.

SKU	Load Cap.	Width	Height	Acetylene Cylinder	Oxygen Cylinder
900-CTR-10	285 lb	28-1/2 in	42 in	8-1/2 in	8-1/2 in
900-CTR-6	220 lb	21 in	41 in	7-1/2 in	7-1/2 in
900-CTR-8	200 lb	26-1/4 in	41 in	7-1/2 in	7-1/2 in

Mig Guns



MIG Construct-A-Gun

Features:

- Fully customizable MIG guns are a versatile choice.
- Comfort grip trigger and handle.
- Easy to change gun tube.

Welding Amp @ Duty Cycle: 250 A @ 80%; 280 A @ 60%

Wire Size: 0.035 in - 0.045 in

Cable Length: 25 ft

SKU	Gas Type	Cooling Method
900-250253545	Argon/CO2	Air



MIG Guns For Miller® Consumables

Features:

- Convenient mig guns are designed for use with Miller® style front end consumables.
- Comfort grip trigger and handle for easy usage.
- Heavy duty spring strain relief.

Gas Type: Argon/CO2

Cooling Method: Air

SKU	Welding Amp @ Duty Cycle	Wire Size	Cable Length
900-135M103035M	130 A @ 80%; 160 A @ 60%	0.030 in - 0.035 in	10 ft
900-250M153035M	250 A @ 80%; 280 A @ 60%	0.030 in - 0.035 in	15 ft
900-250M153545M	250 A @ 80%; 280 A @ 60%	0.035 in - 0.045 in	15 ft



MIG Guns For Tweco® Consumables

Features:

- Designed to use Tweco® style front end consumables.
- Comfort grip trigger and handle.
- Heavy duty spring strain relief.

Gas Type: Argon/CO2


Cooling Method: Air

SKU	Welding Amp @ Duty Cycle	Wire Size	Cable Length
900-135103035M	130 A @ 80%; 160 A @ 60%	0.030 in - 0.035 in	10 ft
900-135103035T	130 A @ 80%; 160 A @ 60%	0.030 in - 0.035 in	10 ft
900-250153035L	250 A @ 80%; 280 A @ 60%	0.030 in - 0.035 in	15 ft
900-250153035M	250 A @ 80%; 280 A @ 60%	0.030 in - 0.035 in	15 ft
900-250153035T	250 A @ 80%; 280 A @ 60%	0.030 in - 0.035 in	15 ft
900-250153545L	250 A @ 80%; 280 A @ 60%	0.035 in - 0.045 in	15 ft
900-250153545M	250 A @ 80%; 280 A @ 60%	0.035 in - 0.045 in	15 ft
900-250153545T	250 A @ 80%; 280 A @ 60%	0.035 in - 0.045 in	15 ft
900-400153545L	350 A @ 80%; 400 A @ 60%	0.035 in - 0.045 in	15 ft
900-400153545M	350 A @ 80%; 400 A @ 60%	0.035 in - 0.045 in	15 ft
900-400153545T	350 A @ 80%; 400 A @ 60%	0.035 in - 0.045 in	15 ft
900-40015116M	350 A @ 80%; 400 A @ 60%	0.045 in - 1/16 in	15 ft
900-40025116M	350 A @ 80%; 400 A @ 60%	0.045 in - 1/16 in	25 ft

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Mig Gun Parts & Accessories



MIG Contact Tips

Features:

- Works with Best Welds® gas diffuser or equivalent OEM MIG guns.
- Industry part number easily recognizable.
- Durable and precise.

Material: Copper

SKU	Tip I.D.	Wire Size	Overall Length
Used With: Tweco® No 6; Spray Master®			
900-16S-35	0.044 in	0.035 in	1.5 in
900-16S-45	0.054 in	0.045 in	1.5 in
900-16S-116	0.073 in	0.0625 in	1.5 in
Used With: Best Welds® 250/400; Tweco® No 2, 3 and 4			
900-14T-52	0.064 in	0.052 in	1.5 in
Used With: Tregaskiss® 450/600; Tough Guns™			
900-403-1-30	0.030 in	0.030 in	1.35 in
900-403-1-52	0.052 in	0.052 in	1.35 in
Used With: Spoolmatic 15; Spoolmatic 30; XR-Aluma-Pro; XR-Pis			
900-206186	0.041 in	0.040 in	1.25 in
Used With: Miller XR/ XR-M; Spoolmatic 15 30A			
900-206188	0.053 in	0.045 in	1.25 in
Used With: Spoolmatic 15; Spoolmatic 30; XR-Aluma-Pro; XR-Pis			
900-206187	0.047 in	0.035 in	1.25 in
900-206189	0.061 in	0.052 in	1.25 in
Used With: Tregaskiss® Tough Gun®; Bernard® BTB® & TGX® guns			
900-403-20-30	0.037 in	.030 in	1.35 in
900-403-20-35	0.042 in	.035 in	1.35 in
900-403-21-45	0.052 in	.045 in	1.35 in
900-403-27-45	0.052 in	.045 in	1.35 in
900-403-20-45	0.052 in	.045 in	1.35 in
900-403-20-116	0.070 in	0.0625 in	1.35 in
Used With: Bernard® BTB; S-Gun®; Clean Air®; Dura-Flux®			
900-T-030	0.037 in	0.03 in	1.5 in
900-T-035	0.042 in	0.035 in	1.5 in
900-TT-035	0.042 in	0.035 in	2.0 in
900-TT-045	0.052 in	0.045 in	2.0 in
900-T-045	0.052 in	0.045 in	1.5 in
900-T-052	0.059 in	0.045 in	1.5 in
900-TT-062	0.069 in	0.062 in	2.0 in
900-T-062	0.069 in	0.062 in	1.5 in
Used With: Miller® M15; M25/25M; M40/40AL			
900-087-299	0.031 in	0.023 in	1.125 in
900-000-067	0.038 in	0.030 in	1.125 in
900-000-068	0.044 in	0.035 in	1.125 in
900-000-069	0.054 in	0.045 in	1.125 in
Used With: Best Welds® 135; Tweco® Mini® and No 1			
900-11-23	0.031 in	0.023 in	1.0 in
900-11T-23	0.031 in	0.023 in	1.0 in
900-11-30	0.038 in	0.030 in	1.0 in
900-11T-30	0.038 in	0.030 in	1.0 in
900-11-35	0.044 in	0.035 in	1.0 in
900-11T-35	0.044 in	0.035 in	1.0 in
900-11-45	0.054 in	0.045 in	1.0 in
Used With: Miller® Spoolmatic® 15/30A; XR® EDGE; XR/ XR® M			
900-135-428	0.040 in	0.030 in	1.437 in
900-135-430	0.050 in	0.035 in	1.437 in
900-135-424	0.059 in	0.047 in	1.437 in
Used With: Best Welds® 250/400; Tweco® No 2, 3 and 4			
900-14-23	0.031 in	0.023 in	1.5 in
900-14-30	0.038 in	0.030 in	1.5 in
900-14T-30	0.038 in	0.030 in	1.5 in

SKU	Tip I.D.	Wire Size	Overall Length
900-14-35	0.044 in	0.035 in	1.5 in
900-14H-35	0.044 in	0.035 in	1.5 in
900-14T-35	0.044 in	0.035 in	1.5 in
900-14-40	0.048 in	0.040 in	1.5 in
900-14-45	0.054 in	0.045 in	1.5 in
900-14H-45	0.054 in	0.045 in	1.5 in
900-14T-45	0.054 in	0.045 in	1.5 in
900-14-52	0.064 in	0.052 in	1.5 in
900-14H-52	0.064 in	0.052 in	1.5 in
900-14H-116	0.073 in	0.0625 in	1.5 in
900-14-116	0.073 in	0.0625 in	1.5 in
900-14T-116	0.073 in	0.0625 in	1.5 in
900-14H-564	0.090 in	0.078 in	1.5 in
Used With: Bernard® 4635 Diffuser; Q-Gun®; S-Gun™			
900-1589	0.042 in	0.035 in	2.0 in
900-1590	0.052 in	0.045 in	2.0 in
900-1598	0.059 in	0.052 in	2.0 in
Used With: Tregaskiss® T30; T40; T50			
900-403-1-35	0.042 in	0.035 in	1.35 in
900-403-1-45	0.052 in	0.045 in	1.35 in
900-403-1-116	0.07 in	0.0625 in	1.35 in
Used With: Bernard® 4635 Diffuser; Q-Gun®; S-Gun™			
900-7489	0.042 in	0.035 in	1.25 in
900-7490	0.052 in	0.045 in	1.25 in
900-7498	0.059 in	0.052 in	1.25 in




Conductor Tubes

Features:

- Sturdy conductor tube.
- A durable, hardworking product.

Angle: 60°

SKU	Used With
900-40CT	400 A Air Cooled MIG Gun
900-62A-60J	No 2 Gun
900-63-60J	No 3 Gun
900-25CTM	250 A Air Cooled MIG Gun
900-64A-60	No 4 Gun
900-305-60	300 A Air Cooled MIG Guns



Gas Diffusers

Features:

- Product is marked with part number or size for easy identification.
- For use with Tregaskiss® Tough Gun®, Bernard® BTB® & TGX® guns.
- Tregaskiss® Toughlock style consumables can be used in place of Tregaskiss® Toughlock & AccuLock™ R series consumables.
- These series are not mixable, but can be used as a full replacements.

Material: Brass

SKU	Used With
900-404-20	Tregaskiss® Tough Gun®, Bernard® BTB® & TGX® guns



MIG Gun Nozzle Retainers and Diffusers

Features:

- Industry part number easily recognizable.
- Meets or exceeds OEM quality and performance.

Material: Brass

SKU	Type	Used With
900-51-23	MIG Gun Gas Diffuser	Tweco® No 1 MIG Guns
900-D-1	Diffuser	Large Centerfire™ Gas Diffusers and Nozzles
900-DS-1	Diffuser	Small Centerfire™ Gas Diffusers and Nozzles
900-51	MIG Gun Gas Diffuser	Tweco® No 1 MIG Guns
900-52	MIG Gun Gas Diffuser	Best Welds® 250 A; Tweco® Style No 2 MIG Guns
900-54A	MIG Gun Gas Diffuser	Best Welds® 400 A; Tweco® Nos 2 and 4 MIG Guns
900-169-716	MIG Gun Gas Diffuser	Miller® M15 MIG Guns
900-169-728	MIG Gun Gas Diffuser	Miller® M25/25M; M40.40AL MIG Guns
900-169-729	MIG Gun Nozzle Retainer	Miller® M25/25M, M40/40AL MIG Guns
900-35-50	MIG Gun Gas Diffuser	Best Welds® 135 A; Tweco® Mini® MIG Guns
900-404-3	MIG Gun Gas Diffuser; Heavy Duty	Tregaskiss® MIG Guns
900-4335	MIG Gun Gas Diffuser; Contact Tips	Bernard® 200 A-300 A MIG Guns; 4200 and 7400 Series Contact Tips
900-4435	MIG Gun Gas Diffuser; Contact Tips	Bernard® 400 A-600 A MIG Guns; 7400 Series Contact Tips
900-4635	MIG Gun Gas Diffuser; Contact Tips	Bernard® 400 A-600 A MIG Guns; 1500 Series Contact Tips
900-52-23	MIG Gun Gas Diffuser	Best Welds® 250 A; Tweco® No 2 MIG Guns
900-52FN	MIG Gun Gas Diffuser	Best Welds® 250 A; Tweco® No 2 MIG Guns; Nos 3 and 4 Nozzles



MIG Gun Shock Washers and Insulators

Features:

- Industry part number easily recognizable.
- Meets or exceeds OEM quality and performance.

SKU	Type	Used With	Material
900-402-5	Shock Washer; Heavy Duty	Tregaskiss® 350 A MIG Guns	Aluminum
900-169-730	MIG Gun Insulator for Slide on Nozzle	Miller® 250 A MIG Guns	Brass
900-32	MIG Gun Insulator for Slide on Nozzle	Best Welds® 250 A; Tweco® Style No 2 MIG Guns	G7 Silicone
900-34A	MIG Gun Insulator for Slide on Nozzle	Best Welds® 400 A; Tweco® No 4 MIG Guns	G7 Silicone
900-34CT	MIG Gun Insulator; Coarse Thread	Best Welds® 400 A; Tweco® No 4 MIG Guns	Copper



MIG Liners

Features:

- Industry part number easily recognizable.
- Meets or exceeds OEM quality and performance.

SKU	Length	Wire Size	Wire Size
Used With: Tregaskiss® Style MIG Guns			
900-415-116-15	15 ft	0.045 in	0.0625 in
Used With: M10; M15; M25/25M; M40/40AL			
900-194-011	15 ft	0.030 in	0.035 in
900-194-012	15 ft	0.035 in	0.045 in
Used With: Tweco® Style Mini®; Best Welds 135 A			
900-35-40-15	15 ft	0.030 in	0.035 in
Used With: Tregaskiss® Style MIG Guns			
900-415-35-15	15 ft	0.035 in	0.045 in
900-415-116-25	25 ft	0.045 in	0.0625 in
Used With: Tweco® Style No 1 and 2; Best Welds 250 A			
900-42-3035-15	15 ft	0.030 in	0.035 in
900-42N-3545-15	15 ft	0.035 in	0.045 in
900-42-4045-15	15 ft	0.040 in	0.045 in
900-42-3035-25	25 ft	0.030 in	0.035 in
900-42-4045-25	25 ft	0.040 in	0.045 in
Used With: Bernard® Style MIG Guns			
900-43115	15 ft	0.035 in	0.045 in
900-44215	15 ft	0.045 in	0.0625 in
Used With: Tweco® Style No 3 and 4; Best Welds 400 A			
900-44-564-15	15 ft	—	0.078 in
900-44-3545-15	15 ft	0.035 in	0.045 in
900-44-116-15	15 ft	0.052 in	0.0625 in
900-44-116-25	25 ft	0.052 in	0.0625 in
900-44-3545-25	25 ft	0.035 in	0.045 in
900-44-564-25	25 ft	0.078 in	0.078 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.




24 Series Nozzles

Features:

- Industry part number easily recognizable.
- Meets or exceeds OEM quality and performance.

Used With: Best Welds® 400; Tweco® No 3 and 4

SKU	Nozzle Style	Bore Size
900-24AT-37SS	Tip Recessed; Tapered; Short-Stop	3/8 in




Centerfire™ Style MIG Gun Nozzles

Features:

- Centerfire™ nozzles have a built-in spatter shield that smooth's and concentrates gas flow for less weld oxidation and contamination.
- Centerfire™ nozzles allow fixed tip positioning at flush, 1/8 in and 1/4 in recess and 1/8 in extension for consistent welds.
- No tools required to replace tip or nozzle.
- Drop-in tip with no threads means quick change after burn back, reducing down time.
- Spatter shield within nozzle protects diffuser and gives smoother, less turbulent gas flow.
- Solid, concentric relationship between tip and nozzle keeps tip centered even after hard use and abuse.
- Threaded nozzle holds tip fixed at 1/4 in or 1/8 in recess, flush or 1/8 in stickout.

SKU	Nozzle Style	Bore Size	Used With
900-NST-3818B	1/8 in Recess	3/8 in	Bernard™ Q-Gun™/EZ Feed II MIG Guns
900-NS-1218C	1/8 in Recess	1/2 in	Bernard™ Q-Gun™/EZ Feed II MIG Guns
900-NS-1218B	1/8 in Recess	1/2 in	Bernard™ Q-Gun™ MIG Gun
900-N-5818C	1/8 in Recess	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-NS-5818B	1/8 in Recess	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-NS-5818C	1/8 in Recess	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-N-5818B	1/8 in Recess	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-N-3418C	1/8 in Recess	3/4 in	Bernard™ Q-Gun™ MIG Gun
900-N-5814C	1/4 in Recess	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-N-5814B	1/4 in Recess	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-NT-3800C	Flush Tip	3/8 in	Bernard™ Q-Gun™ MIG Gun
900-NS-5800B	Flush Tip	5/8 in	Bernard™ Q-Gun™ MIG Gun
900-NST-3800B	Flush Tip	3/8 in	Bernard™ Q-Gun™ MIG Gun
900-N-3400C	Flush Tip	3/4 in	Bernard™ Q-Gun™ MIG Gun



MIG Gun Nozzles

Features:

- Industry part number easily recognizable.
- Meets or exceeds OEM quality and performance.

SKU	Nozzle Style	Bore Size
Used With: Spoolmatic® 1, 2, 3, 30A/XR™ and XRM		
900-050-622	Spoolmatic® Style	5/8 in
Used With: Best Welds® 400; Tweco® No 4		
900-24FN-62S	1/8 in Recess; Fine Thread	5/8 in
Used With: Tregaskiss® T-Gun™ Semi-Automatic Series Mig Guns		
900-401-4-38	Flush; Insulated	3/8 in
Used With: Best Welds® 250/400; Tweco® No 2, 3 and 4		
900-23H-62	1/8 in Recess, Heavy-Duty; Self-Insulated	5/8 in
Used With: Spoolmatic 15; Spoolmatic 30; XR-Aluma-Pro; XR-Pis		
900-199613	—	5/8 in
Used With: Miller® M10/M15; Hobart H-9/H-10		
900-169-715	Flush	1/2 in
Used With: Miller® M25/25M, M40/40AL; Hobart MIG Welding Guns		
900-169-724	1/8 in Recess	1/2 in
900-169-725	1/8 in Recess	5/8 in
900-169-726	Flush	5/8 in
900-200-258	Flush	1/2 in
Used With: Best Welds® 135, Tweco® Mini®/No 1		
900-21-37	1/8 in Recess; Self-Insulated	3/8 in
900-21-50	1/8 in Recess; Self-Insulated	1/2 in
900-21-62	1/8 in Recess; Self-Insulated	5/8 in
900-21-50F	Flush; Self-Insulated	1/2 in
900-21T-37	1/8 in Recess; Tapered; Self-Insulated	3/8 in
Used With: Best Welds® 250; Tweco® No 2		
900-22-50SS	1/8 in Recess, Short-Stop	1/2 in
900-22-62SS	1/8 in Recess, Short-Stop	5/8 in
900-22T-37SS	1/8 in Recess; Tapered; Short Stop	3/8 in
900-22-50	Adjustable	1/2 in
900-22-62	Adjustable	5/8 in
Used With: Best Welds® 250/400; Tweco® No 2, 3 and 4		
900-23-37	1/8 in Recess, Self-Insulated	3/8 in
900-23-50	1/8 in Recess, Self-Insulated	1/2 in
900-23-62	1/8 in Recess, Self-Insulated	5/8 in
900-23-75	1/8 in Recess; Self-Insulated	3/4 in
900-23-62F	Flush	5/8 in
Used With: Best Welds® 250/400; Tweco® Nos 2/3/4		
900-23T-37	1/8 in Recess, Tapered, Self-Insulated	3/8 in
Used With: Best Welds® 400; Tweco® No 4		
900-24A-50SS	1/8 in Recess, Short-Stop	1/2 in
900-24A-62SS	1/8 in Recess, Short-Stop	5/8 in
900-24CT-37S	1/8 in Recess; Coarse Thread	3/8 in
900-24CT-50S	1/8 in Recess; Coarse Thread	1/2 in
900-24CT-75S	1/8 in Recess; Coarse Thread	3/4 in
900-24CT-50F	Flush, Coarse Thread	1/2 in
900-24CT-62F	Flush; Coarse Thread	5/8 in
900-24CT-62S	Coarse Thread	5/8 in
900-24AH-62	Adjustable, Heavy-Duty	5/8 in
900-24A-50	Adjustable	1/2 in
900-24A-62	Adjustable	5/8 in
900-24A-75	Adjustable	3/4 in
Used With: Tregaskiss® T-Gun™ Semi-Automatic Series Mig Guns		
900-401-4-50	1/8 in Recess; Insulated	1/2 in
900-401-4-62	1/8 in Recess; Insulated	5/8 in
900-401-6-62	1/8 in Recess; Heavy-Duty; Insulated	5/8 in
900-401-6-75	1/8 in Recess; Heavy-Duty; Insulated	3/4 in
Used With: Bernard® Q-Gun™ and S-Gun™		
900-4392	Heavy-Duty; Insulated	1/2 in
900-4592	Heavy-Duty; Insulated	9/16 in
900-4391	Heavy-Duty; Insulated	5/8 in
900-4393	Heavy-Duty; Insulated	5/8 in



Standard Slip-on Mig Nozzles

Features:

- Use for heavy duty welding.
- Part number displayed on exterior surface.

Used With: Tweco® Spray Master®

SKU	Nozzle Style	Bore Size
900-HD24L-62	Slip-On; 1/8 in to 5/32 in Tip Recess	5/8 in



Connectors/Adaptors for MIG Guns

Features:

- Convenient connectors and adaptors work to connect platform guns or MIG guns to welding machine.
- Sturdy parts made with quality construction.

SKU	Used With	Type	Material	Length
900-25LAC	Lincoln® LN-7 Series; LN-742; LN-8; LN-9 Series; LN-25 Welding Machines	Trigger Connector	Thermal Plastic	3 -1/4 in
900-25LC	Lincoln® LN-7 Series; LN-742; LN-9 Series; LN-25 Welding Machines	Machine Connector	Brass	3-7/8 in
900-25MC	Miller® 90/120/130/130XP; Miller® 140/150/175/180/185/211; SideKick; SideKick XL; Miller Challenger; Challenger 172; Miller® DVI; Miller® Passport; Miller® 200, 210, 212, 250, 250X, 251, 252 350/350P and Miller® Vintage; 300 Access 300/450; MigRunner PackageCP-302; Delta-Fab System; Deltaweld 302, 452; Invision 456MP, 456P; Hobart Beta-MIG 1800 (500 Series) and IronMan 210/240; Hobart Beta-MIG 2510 (500 Series); Beta-MIG 2250; IronMan 250, 275	Connector	Brass	3 -1/4 in
900-25TC	Tweco® Style 250 A and 400 A	Connector, Tweco® Style; Brass	Brass	2-1/4 in



Consumable Kits For MIG Construct-A-Gun Platforms

Features:

- Consumable kit for Construct-A-Gun Platform.
- Part of a MIG Gun all-inclusive platform.

SKU	Used With
900-MCK-BR2	Bernard® 250 A
900-MCK-BR4	Bernard® 400 A
900-MCK-TR2	Tregaskiss® 250 A
900-MCK-TR4	Tregaskiss® 400 A
900-MCK-TW2	Tweco® 250 A
900-MCK-TW4	Tweco® 400 A
900-MCK-MR2	Miller® Style 250 A



Mig Torch Stand Magnetic Base

Features:

- Helps keep torch away from table clutter.
- Protects torch head from inadvertent damage.
- Magnetic base offers great flexibility as it attaches to any steel surface.
- Magnetic base prevents slippage of stand.

Material: Magnet; Steel

Style: Stand with Magnetic Base


Length: 5.4 in

SKU	Used With
900-BW-MMTS	MIG Torch

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

MIG Welding Wires



ER308L MIG Welding Wires

Features:

- Used for welding types 304, 304L, 308 and 308L stainless steels.
- Very similar to type 308 but has a carbon content held to a max of 0.03% to avoid carbide precipitation.

SKU	Tensile Strength	Material	Dia.	Wt.
900-308L023x10	88 psi	Stainless Steel	0.023 in	10 lb
900-308L023X2	84 kpsi	Stainless Steel	0.023 in	2 lb
900-308L030x10	84 kpsi	Stainless Steel	0.030 in	10 lb
900-308L030X2	84 kpsi	Stainless Steel	0.030 in	2 lb
900-308L030x30	84 kpsi	Stainless Steel	0.030 in	30 lb
900-308L035x10	84 kpsi	Stainless Steel	0.035 in	10 lb
900-308L035X2	84 kpsi	Stainless Steel	0.035 in	2 lb
900-308L035X30	84 kpsi	Stainless Steel	0.035 in	30 lb
900-308L045X30	84 kpsi	Stainless Steel	0.045 in	30 lb




ER308LSI MIG Welding Wires

Features:

- Same analysis as ER308L but with a higher silicon content.
- Higher silicon content improves arc stability, bead appearance and wetting action.
- Produces exceptionally smooth welds for applications that require a good cosmetic appearance.
- Primarily used with welding grades 304 and 308.

Wt.: 30 lb

SKU	Tensile Strength	Material	Dia.
900-308LHISIL035X30	85 kpsi	Stainless Steel	0.035 in
900-308LHISIL116X30	85 kpsi	Stainless Steel	1/16 in



ER309L MIG Welding Wires

Features:

- Similar to type 309 except for the carbon content being lower than .03%.
- Extra low carbon content provides good resistance to carbide precipitation and intergranular corrosion.
- Works well for dissimilar joints that undergo heat treatment.

SKU	Tensile Strength	Material	Dia.	Wt.
900-309L030x10	86 kpsi	Stainless Steel	0.030 in	10 lb
900-309L035x10	86 kpsi	Stainless Steel	0.035 in	10 lb
900-309L035X30	86 kpsi	Stainless Steel	0.035 in	30 lb



ER316L MIG Welding Wires

Features:

- Used for welding types 316 and 316L stainless steels.
- Maximum carbon content of 0.03% to reduce the possibility of formation of intergranular carbide precipitation.
- Primarily used for welding low carbon molybdenum bearing austenitic alloys.

SKU	Tensile Strength	Material	Dia.	Wt.
900-316L023X2	86 psi	Stainless Steel	0.023 in	2 lb
900-316L030X10	55 ksi	Stainless Steel	0.030 in	10 lb
900-316L035X10	86 psi	Stainless Steel	0.035 in	10 lb
900-316L035X2	86 psi	Stainless Steel	0.035 in	2 lb



ER4043 MIG Welding Wires

Features:

- One of the oldest and most widely used welding and brazing alloys.
- Contains silicon additives, which result in improved fluidity (wetting action) of the weld pool.
- Also produces a weld less sensitive to cracking.
- Can be used to weld various grades of aluminum.

SKU	Tensile Strength	Material	Dia.	Wt.
900-4043-030X1	29 kpsi	Aluminum; Aluminum Alloy	0.030 in	1 lb
900-4043-030X16	29 kpsi	Aluminum; Aluminum Alloy	0.030 in	16 lb
900-4043-035X1	29 kpsi	Aluminum; Aluminum Alloy	0.035 in	16 lb
900-4043-035X16	29 kpsi	Aluminum; Aluminum Alloy	0.035 in	16 lb
900-4043-364X1	29 kpsi	Aluminum; Aluminum Alloy	3/64 in	1 lb
900-4043-040x1	27,000 to 43,000 psi; 200 to 305 Mpa	Aluminum	0.040 in	1 lb
900-4043-364X16	27,000 - 43,000 psi; 200 - 305 Mpa	Aluminum	3/64 in	16 lb



ER5356 MIG Welding Wires

Features:

- General-purpose type aluminum alloy which is typically chosen for its relatively high shear strength.
- Offers excellent corrosion resistance when exposed to salt water.
- Should be considered for welding 5000 series aluminum base metals.

SKU	Tensile Strength	Material	Dia.	Wt.
900-5356-030X1	38 kpsi	Aluminum; Aluminum Alloy	0.030 in	1 lb
900-5356-035X1	38 kpsi	Aluminum; Aluminum Alloy	0.035 in	1 lb
900-5356-035X16	38 kpsi	Aluminum Alloy	0.035 in	16 lb
900-5356-116X36X1	38 kpsi	Aluminum Alloy	1/16 in	1 lb
900-5356-18X36X1	38 kpsi	Aluminum Alloy	1/8 in	1 lb
900-5356-332X36X1	38 kpsi	Aluminum Alloy	3/32 in	1 lb
900-5356-364X1	38 kpsi	Aluminum Alloy	3/64 in	1 lb
900-5356-040X1	29,000 to 45,000 psi; 200 to 310 Mpa	Aluminum Alloy	0.040 in	1 lb



ER70S-3 MIG Welding Wires

Features:

- General purpose MIG wire suitable for many carbon steel welding applications.
- Silicon and manganese deoxidized wire makes it excellent for general fabrication.
- This product requires a shielding gas.

Dia.: 0.035 in

Wt.: 44 lb

SKU	Material
900-ER70S3-035X44	Carbon Steel



ER70S-6 MIG Premium Welding Wires


Features:

- Mild steel welding wire that contains high levels of manganese and silicon which produces high quality welds when used on dirty, oily or rusty steel.
- The high silicon content increases the fluidity of the weld pool, creating a smoother bead appearance resulting in minimal post-weld grinding.
- Engineered to provide porosity-free, x-ray quality welds at the highest tensile strength of all the plain carbon steel wires.

SKU	Tensile Strength	Material	Dia.	Wt.
900-70S6023X12S	85,000 psi	Carbon Steel	0.023 in	12 lb
900-70S6023X2S	85,000 psi	Carbon Steel	0.023 in	2 lb
900-70S6023X33S	85,000 psi	Carbon Steel	0.023 in	33 lb
900-70S6030X12S	85,000 psi	Carbon Steel	0.030 in	12 lb
900-70S6030X2S	85,000 psi	Carbon Steel	0.030 in	2 lb
900-70S6030X33S	85,000 psi	Carbon Steel	0.030 in	33 lb
900-70S6030X44S	85,000 psi	Carbon Steel	0.030 in	44 lb
900-70S6035X12S	85,000 psi	Carbon Steel	0.035 in	12 lb
900-70S6035X2S	85,000 psi	Carbon Steel	0.035 in	2 lb
900-70S6035X33S	85,000 psi	Carbon Steel	0.035 in	33 lb
900-70S6035X44S	85,000 psi	Carbon Steel	0.035 in	44 lb
900-70S6035X616S	85,000 psi	Carbon Steel	0.035 in	616 lb
900-70S6045X264S	85,000 psi	Carbon Steel	0.045 in	264 lb
900-70S6045X2S	85,000 psi	Carbon Steel	0.045 in	2 lb
900-70S6045X33S	85,000 psi	Carbon Steel	0.045 in	33 lb
900-70S6045X44S	85,000 psi	Carbon Steel	0.045 in	44 lb

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



ER70S-6 MIG Welding Wires

Features:

- High quality welds when used on dirty, oily, or rusty steel.
- Creates a smooth bead appearance resulting in minimal post-weld grinding.
- Provides porosity free, x-ray quality weld.

SKU	Tensile Strength	Material	Dia.	Wt.
900-70S6023x11	550 MPa	Carbon Steel	0.023 in	2 lb
900-70S6023X2	550 MPa	Carbon Steel	0.023 in	2 lb
900-70S6030x11	550 MPa	Carbon Steel	0.030 in	11 lb
900-70S6030X2	550 MPa	Carbon Steel	0.030 in	2 lb
900-70S6035x11	550 MPa	Carbon Steel	0.035 in	11 lb
900-70S6035X2	70 kpsi	Carbon Steel	0.035 in	2 lb
900-70S6035X550	550 MPa	Carbon Steel	0.035 in	550 lb
900-70S6045X550	550 MPa	Carbon Steel	0.045 in	2,200 lb
900-70S6035X33-PLT	550 MPa	Carbon Steel	0.035 in	2,376 lb
900-70S6035X33-BOX	550 MPa	Carbon Steel	0.035 in	33 lb
900-70S6035X44-PLT	550 MPa	Carbon Steel	0.035 in	2,640 lb
900-70S6035X44-BOX	550 MPa	Carbon Steel	0.035 in	44 lb
900-70S6045X33-BOX	550 MPa	Carbon Steel	0.045 in	33 lb
900-70S6045X33-PLT	550 MPa	Carbon Steel	0.045 in	33 lb
900-70S6045X44-BOX	550 MPa	Carbon Steel	0.045 in	44 lb
900-70S6045X44-PLT	550 MPa	Carbon Steel	0.045 in	2,640 lb
900-70S6030x33	550 MPa	Carbon Steel	0.030 in	33 lb
900-70S6116x36X1	77 psi	Carbon Steel	1/16 in	1 lb
900-70S6332x36X1	77 psi	Carbon Steel	1/16 in	1 lb
900-70S6045X11	550 MPa	Carbon Steel	0.045 in	11 lb

Tig Torches & Torch Bodies



Modular Torch Kits

Features:

- Meets or exceeds OEM quality and performance.
- Complies with industry standard part number.

Material: Silicone Rubber

Cooling Method: Air

SKU	Head Type	Cable Length	Includes
900-M-150-R	Modular	25 ft	(1) 150 A Air Cooled Torch Package, 25 ft; (5) Modular Torch Heads; (2) Torch Bodies, With and Without Valve; (1) Consumables Kit with Collets/Collet Bodies/Nozzles/Back Caps to Fit All Heads and Tungsten Sizes 0.040 in 1/16 in and 3/32 in; (1) Tungsten Kit with 3 Pure and 3 Lanthanated Tungsten Sizes 0.040 in 1/16 in and 3/32 in Each; (1) Reuseable Aluminum Attache Case; (2) Wrenches
900-M-200-R	Modular	25 ft	(1) 200 A Air Cooled Torch Package 25 ft; (5) Modular Torch Heads; (2) Torch Bodies With and Without Valve; (1) Consumables Kit with Collets/Collet Bodies/Nozzles/Back Caps to Fit All Heads and Tungsten Sizes 1/16 in 3/32 in; and 1/8 in; (1) Tungsten Kit with 3 Pure and 3 Lanthanated Tungsten Sizes 1/16 in 3/32 in and 1/8 in Each; (1) Reuseable Aluminum Attache Case; (2) Wrenches



TIG Torch Assemblies

Features:

- Torch body with head assembly for TIG welding torch.
- Reliable quality.

Material: Silicone Rubber

SKU	Head Type	Cooling Method	Includes
900-17FMT	Flex	Air	Body; 90° Flex Head
900-17FM	Flex	Air	Flex Head; 90°
900-24FMT	Flex	Air	Body; 90° Flex Head
900-26FM	Flex	Air	Flex Head; 90°
900-26FMT	Flex	Air	Body; 90° Flex Head
900-9FMT	Flex	Air	Body; 90° Flex Head
900-9F	Flex	Air	Flex Head; 60°
900-17F	Flex	Air	Flex Head; 60°
900-24FVMT	Flex with Valve	Air	Body with Valve; 90° Flex Head
900-9FV	Flex with Valve	Air	Flex Head with Valve; 90°
900-17FV	Flex with Valve	Air	Flex Head with Valve
900-17FVMT	Flex with Valve	Air	Body with Valve; 90° Flex Head
900-26FV	Flex with Valve	Air	Flex Head with Valve; 60°
900-017V	Rigid with Valve	Air	Rigid Head with Valve
900-9	Rigid	Air	Rigid Head; 60°
900-17	Rigid	Air	Rigid Head; 60°
900-24FM	Rigid	Air	Rigid Head; 90°
900-18SC	Rigid	Water	Body; 70° Rigid Head
900-20	Rigid	Water	Rigid Head; 60°
900-18F	Flex	Water	Flex Head; 60°
900-20F	Flex	Water	Flex Head; 60°



TIG Torch Component Style Packages

Features:

- Meets or exceeds OEM quality and performance.
- Complies with industry standard part number.

Cooling Method: Air

SKU	Head Type	Cable Length
Includes: Torch Package; (1) Handle; 1-Pc Rubber Power Cable; Insulator		
900-24FMT-12-R	Flex Torch Assembly	12.5 ft
900-24FMT-25-R	Flex Torch Assembly	25 ft
900-24FVMT-12-R	Flex with Valve Torch Assembly	12.5 ft
900-24FVMT-25-R	Flex with Valve Torch Assembly	25 ft
Includes: Torch Package; (1) Handle; 1-Pc Rubber Power Cable; Insulator; Medium Back Cap		
900-9FMT-12-R	Flex Torch Assembly	12.5 ft
900-9FMT-25-R	Flex Torch Assembly	25 ft
900-9FVMT-12-R	Flex with Valve Torch Assembly	12.5 ft
900-9FVMT-25-R	Flex with Valve Torch Assembly	25 ft
Includes: Torch Package; (1) Handle; 1-Pc Rubber Power Cable; Insulator; Long Back Cap		
900-17FMT-12-R	Flex Torch Assembly	12.5 ft
900-17FMT-25-R	Flex Torch Assembly	25 ft
900-17FVMT-25-R	Flex with Valve Torch Assembly	25 ft
Includes: Torch Package; (1) Handle; Rubber Power Cable; Insulator; Long Back Cap		
900-26FMT-12-R	Flex	12.5 ft
900-26FMT-25-R	Flex	25 ft
900-26FVMT-12-R	Flex with Valve	12.5 ft
900-26FVMT-25-R	Flex with Valve	25 ft
Includes: Torch Package; (1) Handle; 2-Pc Vinyl Power Cable; Insulator		
900-24FMT-12-2	Flex Torch Assembly	12.5 ft
900-24FMT-25-2	Flex Torch Assembly	25 ft
900-24FVMT-12-2	Flex with Valve Torch Assembly	12.5 ft
900-24FVMT-25-2	Flex with Valve Torch Assembly	25 ft
Head Type: Torch Package; (1) Handle; 2-Pc Vinyl Power Cable; Insulator; Medium Back Cap		
900-9FMT-12-2	Flex Torch Assembly	12.5 ft
900-9FMT-25-2	Flex Torch Assembly	25 ft
900-9FVMT-12-2	Flex with Valve Torch Assembly	12.5 ft
900-9FVMT-25-2	Flex with Valve Torch Assembly	25 ft
Includes: Torch Package; (1) Handle; 2-Pc Vinyl Power Cable; Insulator; Long Back Cap		
900-26FMT-12-2	Flex	12.5 ft
900-26FMT-25-2	Flex	25 ft
900-26FVMT-12-2	Flex with Valve	12.5 ft
900-26FVMT-25-2	Flex with Valve	25 ft
900-17FMT-12-2	Flex Torch Assembly	12.5 ft
900-17FMT-25-2	Flex Torch Assembly	25 ft



TIG Torch Heads

Features:

- Torch head for TIG welding torch.
- Reliable quality.


Material: Silicone Rubber

SKU	Head Type	Cooling Method	Includes
900-9FVMT	Flex with Valve	Air	Body with Valve; 90° Flex Head
900-1726M	Round	Air; Water	Round Head; 70°
900-1726PM	Round	Air; Water	Round Head; 180°
900-24-90	Rigid	Air	Rigid Head; 90°
900-24-90M	Round	Air; Water	Round Head; 90°
900-26FVMT	Flex with Valve	Air	Body with Valve; 90° Flex Head
900-9-70M	Round	Air; Water	Round Head; 70°
900-9-90M	Round	Air; Water	Round Head; 90°



TIG Torch Modular Style Packages

SKU	Head Type	Length
Includes: Torch Body; Flex Element; Solid Element; 1-Pc Rubber Power Cable; Handle; 9-70M Head; 1726M Head; Wrench		
900-150M-12-R	Flex	12.5 ft
900-150M-25-R	Flex	25 ft
900-150VM-12-R	Flex with Valve	12.5 ft
900-150VM-25-R	Flex with Valve	25 ft
Includes: Torch Body; Flex Element; Solid Element; 1-Pc Rubber Power Cable; Handle; 1726PM Head; 1726M Head; Wrench		
900-200M-12-R	Flex	12.5 ft
900-200M-25-R	Flex	25 ft
900-200VM-12-R	Flex with Valve	12.5 ft
900-200VM-25-R	Flex with Valve	25 ft
Includes: Torch Body; Flex Element; Solid Element; 2-Pc Vinyl Power Cable; Handle; 9-70M Head; 1726M Head; Wrench		
900-150M-12-2	Flex	12.5 ft
900-150M-25-2	Flex	25 ft
900-150VM-12-2	Flex with Valve	12.5 ft
900-150VM-25-2	Flex with Valve	25 ft
Includes: Torch Body; Flex Element; Solid Element; 2-Pc Vinyl Power Cable; Handle; 1726PM Head; 1726M Head; Wrench		
900-200M-12-2	Flex	12.5 ft
900-200M-25-2	Flex	25 ft
900-200VM-12-2	Flex with Valve	12.5 ft
900-200VM-25-2	Flex with Valve	25 ft
Includes: Flex Torch Body; Vinyl Power Cable; Water and Gas Hoses; Handle; 9-70M Head; 1726M Head		
900-225M-12	Flex	12.5 ft
900-225M-25	Flex	25 ft
Includes: Flex Torch Body; Rubber Power Cable; Water and Gas Hoses; Handle; 9-70M Head; 1726M Head		
900-225M-12-R	Flex	12.5 ft
900-225M-25-R	Flex	25 ft
900-225M-50-R	Flex	50 ft

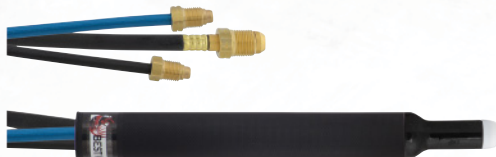

TIG Torch Packages

SKU	Head Type	Length	Material	Cooling Method
Includes: Torch; (1) Handle; 1-Pc Rubber Power Cable; Insulator; Medium Back Cap				
900-9FV-25-R	Flex with Valve	25 ft	Rubber	Air
Includes: Torch Assembly; (1) Handle; Rubber Power Cable; Insulator; Long Back Cap				
900-26FV-25-R	Flex with Valve	25 ft	Rubber	Air
Includes: Torch; (1) Handle; 1-Pc Rubber Power Cable; Insulator; Long Back Cap				
900-17FV-12-R	Flex with Valve	12.5 ft	Rubber	Air
900-17F-25-R	Flex	25 ft	Rubber	Air
900-17-25-R	Rigid	25 ft	Rubber	Air
900-17FV-25-R	Flex with Valve	25 ft	Rubber	Air
900-17V-25-R	Rigid with Valve	25 ft	Rubber	Air
Includes: Torch; (1) Handle; 2-Pc Vinyl Power Cable; Insulator; Long Back Cap				
900-17FV-12-2	Flex with Valve	12.5 ft	Vinyl	Air
900-17FV-25-2	Flex with Valve	25 ft	Vinyl	Air
900-17V-25-2	Rigid with Valve	25 ft	Vinyl	Air
Includes: Torch; (1) Handle; Rubber Power Cable; TTC-150 Connector; Insulator; Long Back Cap				
900-17FV-25-R-TTC	Flex with Valve	25 ft	Rubber	Air
Includes: Torch; Handle; Braided Rubber Power Cable; Water and Gas Hoses; Insulator; Medium Back Cap				
900-20-12-R	Rigid	12.5 ft	Braided Rubber	Water
900-20-25-R	Rigid	25 ft	Braided Rubber	Water
900-20-50-R	Rigid	50 ft	Braided Rubber	Water
900-20F-25-R	Flex	25 ft	Braided Rubber	Water
900-20P-12-R	Pencil	12.5 ft	Braided Rubber	Water
900-20P-25-R	Pencil	25 ft	Braided Rubber	Water
900-20M-12-R	250 A Machine Head	12.5 ft	Braided Rubber	Water
900-20M-25-R	250 A Machine Head	25 ft	Braided Rubber	Water
Includes: Torch; Handle; Braided Rubber Power Cable; Water and Gas Hoses; Insulator; Long Back Cap				
900-18F-12-R	Flex	12.5 ft	Braided Rubber	Water
900-18F-25-R	Flex	25 ft	Braided Rubber	Water
900-18-12-R	Rigid	12.5 ft	Braided Rubber	Water
900-18-25-R	Rigid	25 ft	Braided Rubber	Water
900-18V-12-R	Rigid with Valve	12.5 ft	Braided Rubber	Water

SKU	Head Type	Length	Material	Cooling Method
900-18V-25-R	Rigid with Valve	25 ft	Braided Rubber	Water
900-18P-12	500 A Machine Head	12.5 ft	Braided Rubber	Water
900-18P-25	500 A Machine Head	25 ft	Braided Rubber	Water
Includes: Torch; Handle; Braided Rubber Power Cable; Water and Gas Hoses; Long Back Cap				
900-18SC-25-R	Rigid	25 ft	Braided Rubber	Water
Includes: Torch; Handle; Vinyl Power Cable; Water and Gas Hoses; Insulator; Medium Back Cap				
900-20-25	Rigid	25 ft	Vinyl	Water
900-20P-12	Pencil	12.5 ft	Vinyl	Water
900-20P-25	Pencil	25 ft	Vinyl	Water
900-20M-12	250 A Machine Head	12.5 ft	Vinyl	Water
900-20M-25	250 A Machine Head	25 ft	Vinyl	Water
Includes: Torch; Handle; Vinyl Power Cable; Water and Gas Hoses; Long Back Cap				
900-18SC-12	Rigid	12.5 ft	Vinyl	Water
900-18SC-25	Rigid	25 ft	Vinyl	Water
Includes: Torch; Handle; Vinyl Power Cable; Water and Gas Hoses; Insulator; Long Back Cap				
900-18F-12	Flex	12.5 ft	Vinyl	Water
900-18F-25	Flex	25 ft	Vinyl	Water
900-18-25	Rigid	25 ft	Vinyl	Water
900-18V-12	Rigid with Valve	12.5 ft	Vinyl	Water
900-18V-25	Rigid with Valve	25 ft	Vinyl	Water
Includes: Torch; 1-Pc Power Cable; Water and Gas Hoses; Insulating Boot; Insulator				
900-22A-3	250 A Machine Head	3 ft	Braided Rubber	Water
900-22B-3	250 A Machine Head	3 ft	Braided Rubber	Water
900-22B-6	250 A Machine Head	6 ft	Braided Rubber	Water
900-22A-6	250 A Machine Head	6 ft	Braided Rubber	Water
900-22A-12	250 A Machine Head	12.5 ft	Braided Rubber	Water
900-22A-25	250 A Machine Head	25 ft	Braided Rubber	Water
900-22B-12	250 A Machine Head	12.5 ft	Braided Rubber	Water
900-22B-25	250 A Machine Head	25 ft	Braided Rubber	Water

Tig Torch Parts & Accessories



TIG Accessory Kits - AK-2

Features:

- Everything needed for a 0.040 in, 1/16 in and 3/32 in standard set-up.
- Includes E3 Tungsten.

SKU	Includes	Used on Torch(es)
900-AK-2	(1) Short Back Cap; (3) Collets 0.040 in, 1/16 in and 3/32 in; (3) Collet Bodies 0.040 in, 1/16 in and 3/32 in; (3) Alumina Nozzles Nos 4, 5, 6; (3) Tungsten 7 in 0.040 in, 1/16 in and 3/32 in	17; 18; 26




TIG Accessory Kits - AK-225

Features:

- Modular torch heads and everything needed for a 1/16 in, 3/32 in and 1/8 in standard set-up.
- Consumables for 225 A torch heads.

SKU	Includes	Used on Torch(es)
900-AK-225	(5) Modular Torch Heads; (1) Consumables Kit with Collets/Collet Bodies/Nozzles and Back Caps to Fit All Heads and Tungsten Sizes 1/16 in 3/32 in and 1/8 in; (1) Tungsten Kit with 3 Pure and 3 Lanthanated Tungsten Sizes 1/16 in 3/32 in and 1/8 in Each; (1) Reusable Aluminum Attaché Case	225M



TIG Accessory Kits - AK-3

Features:

- Everything needed for a 1/16 in, 3/32 in and 1/8 in standard set-up.
- Includes E3 Tungsten.

SKU	Includes	Used on Torch(es)
900-AK-3	(1) Short Back Cap; (3) Collets 1/16 in, 3/32 in and 1/8 in; (3) Collet Bodies 1/16, 3/32 in and 1/8 in; (3) Alumina Nozzles Nos 5, 6, 8; (3) Tungsten 7 in 1/16 in, 3/32 in and 1/8 in	17; 18; 26



TIG Accessory Kits - AK-4

Features:

- Everything needed for a 1/16, 3/32 in and 1/8 in standard set-up.
- Includes E3 Tungsten.

SKU	Includes	Used on Torch(es)
900-AK-4	(1) Long Back Cap; (3) Collets 1/16, 3/32 in and 1/8 in; (3) Collet Bodies 1/16, 3/32 in and 1/8 in; (3) Alumina Nozzles Nos 5, 6, 7; (3) Tungsten 7 in 1/16 in, 3/32 in and 1/8 in	9; 20; 22; 25




TIG Accessory Kits - MAK-1S

Features:

- Kit for standard and gas lens set-ups 0.040 in, 1/16 in, 3/32 in and 1/8 in.
- Reusable plastic case.

SKU	Includes	Used on Torch(es)
900-MAK-1S	(4) Back Caps (1) Short, (2) Medium, (1) Long; (12) Collets (2) 0.040 in, (4) 1/16 in, (4) 3/32 in, (2) 1/8 in; (7) Collet Bodies (1) 0.040 in, (2) 1/16 in, (2) 3/32 in, (2) 1/8 in; (4) Gas Lenses 0.040 in, 1/16 in, 3/32 in, and 1/8 in; (1) Cup Gasket; (4) O-Rings for Back Caps; (10) Wire Clamps	9; 20

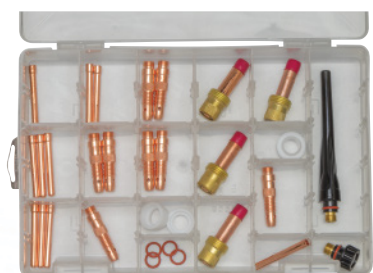

TIG Accessory Kits - MAK-2S

Features:

- Kit for standard and gas lens set-ups 0.040 in, 1/16 in, 3/32 in, 1/8 in and 5/32 in.
- Reusable plastic case.

SKU	Includes	Used on Torch(es)
900-MAK-2S	(2) Back Caps (1) Short (1) Long; (10) Collets (1) 0.040 in (3) 1/16 in (2) 3/32 in (2) 1/8 in (1) 5/32 in; (8) Collet Bodies (1) 0.040 in (2) 1/16 in (2) 3/32 in (2) 1/8 in (1) 5/32 in; (4) Gas Lenses 0.040 in 1/16 in 3/32 in and 1/8 in; (2) Cup Gaskets; (1) Gas Lens Insulator; (4) O-Rings for Back Caps	17; 18; 26



Power Cable Adapters

Features:

- Forged one-piece construction.
- Order adapters separately if needed, not included in torch packages.
- Power cable adapters are not supplied with the torch packages.

SKU	Used With	Thread - TPI or Pitch
900-45V11	One-Pc Water-Cooled Torch Packages	7/8 in-14
900-45V62	One-Pc Air-Cooled Torch Packages	7/8 in-14
900-105Z57	One-Pc Air-Cooled Torch Packages	3/8 in-24
900-53N43	One-Pc Air-Cooled Torch Packages	3/8 in-24



Back Caps

Features:

- Add a trusty tool to your kit with this industry standard part.
- High quality back caps offer a reliable solution.

SKU	Type	Used on Torch(es)	Length
900-41V33	Short Back Cap	9; 20	1-7/8 in
900-41V35	Medium Back Cap	9; 20	1-7/8 in
900-41V24	Long Back Cap	9; 20	5-3/4 in
900-57Y04	Short Back Cap	17; 18; 26	1-7/8 in
900-300M	Medium Back Cap	17; 18; 26	2-1/4 in
900-57Y02	Long Back Cap	17; 18; 26	4-3/4 in



Collet Bodies

Features:

- Add a trusty tool to your kit with this industry standard part.
- High quality collet bodies offer a reliable solution.

Material: Copper

SKU	Used On	Size	Type
900-17CB20	17; 18; 26	1/8 in	Stubby Collet Body
900-10N28	17; 18; 26	1/8 in	Standard Collet Body
900-10N30	17; 18; 26	0.040 in	Standard Collet Body
900-10N31	17; 18; 26	1/16 in	Standard Collet Body
900-10N32	17; 18; 26	3/32 in	Standard Collet Body
900-13N25	9; 20	0.020 in	Standard Collet Body
900-13N26	9; 20	0.040 in	Standard Collet Body
900-13N27	9; 20	1/16 in	Standard Collet Body
900-13N28	9; 20	3/32 in	Standard Collet Body
900-13N29	9; 20	1/8 in	Standard Collet Body
900-406488	18; 26	5/32 in	Standard Collet Body
900-24CB332	24	3/32 in	Standard Collet Body




Collets

Features:

- Add a trusty tool to your kit with this industry standard part.
- High quality collets offer a reliable solution.

Material: Copper

SKU	Used On	Size	Type
900-10N25HD	17; 18; 26	1/8 in	HD Collet
900-53N14	24	1/16 in	Standard Collet
900-54N20HD	17; 18; 26	5/32 in	Heavy-Duty Collet
900-10N22	17; 18; 26	0.040 in	Standard Collet
900-10N23	17; 18; 26	1/16 in	Standard Collet
900-10N23S	17; 18; 26	1/16 in	Stubby Collet
900-10N24	17; 18; 26	3/32 in	Standard Collet
900-10N24S	17; 18; 26	3/32 in	Stubby Collet
900-10N25	17; 18; 26	1/8 in	Standard Collet
900-10N25S	17; 18; 26	1/8 in	Stubby Collet
900-13N20	9; 20	0.020 in	Standard Collet
900-13N21	9; 20	0.040 in	Standard Collet
900-13N22	9; 20	1/16 in	Standard Collet
900-13N22L	9; 20	1/16 in	Long Collet
900-13N23	9; 20	3/32 in	Standard Collet
900-13N23L	9; 20	3/32 in	Long Collet
900-13N24	9; 20	1/8 in	Standard Collet
900-13N24L	9; 20	1/8 in	Long Collet
900-24C332	24	3/32 in	Standard Collet
900-24GLC332	24	3/32 in	Long Collet
900-54N20	17; 18; 26	5/32 in	Standard Collet
900-57N48	27	1/8 in	Collet
900-2304-0088	A16F; A16FV; A16HP; A16HPV; A35HP	1/16 in	Collet



Gas Lens Collet Bodies

Features:

- Gas lenses provide a more efficient stream of shielding gas to the welding process.

Material: Brass; Copper

SKU	Used On	Size	Type
900-45V116	18; 20; 22; 24W; 25	1/16 in	Large Standard Gas Lens
900-45V116S	18; 20; 22; 24W; 25	1/16 in	Large Stubby Gas Lens
900-45V25	17; 18; 26	1/16 in	Medium Standard Gas Lens
900-45V26	17; 18; 26	3/32 in	Medium Standard Gas Lens
900-45V27	17; 18; 26	1/8 in	Medium Standard Gas Lens
900-45V28	17; 18; 26	5/32 in	Medium Standard Gas Lens
900-45V41	9; 20	0.020 in	Small Standard Gas Lens
900-45V42	9; 20	0.040 in	Small Standard Gas Lens
900-45V43	9; 20	1/16 in	Small Standard Gas Lens
900-45V44	9; 20	3/32 in	Small Standard Gas Lens
900-45V45	9; 20	1/8 in	Small Standard Gas Lens
900-45V63	17; 18; 26	5/32 in	Large Standard Gas Lens
900-45V64	17; 18; 26	3/32 in	Large Standard Gas Lens
900-45V64S	17; 18; 26	3/32 in	Large Stubby Gas Lens
900-49V25	27	1/8 in	Gas Lens Collet Body
900-995795	17; 18; 26	1/8 in	Standard Gas Lens Collet Body
900-995795S	9; 20	1/8 in	Stubby Gas Lens Collet Body
900-116L53	12	5/32 in	Gas Lens Collet Body
900-49V23	27	1/16 in	Gas Lens Collet Body



TIG Gaskets and Insulators

Features:

- Industry standard part.
- High quality cup gasket.

SKU	Type	Size Group	Used on Torch(es)
900-18CG	Cup Gasket	Standard	17; 18; 26
900-598882	Cup Gasket	Small	9; 20
900-22-10	Cup Gasket	Small	22A; 22B
900-18-7	Insert	Medium	17; 18; 26
900-54N01	Gas Lens Cup Insulator	Medium	17; 18; 26
900-54N63	Gas Lens Cup Insulator	Large	17; 18; 26
900-54N63-20	Gas Lens Cup Insulator	Stubby	9; 20
900-18CG20	Cup Gasket	Stubby	17; 18; 26

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.




Alumina Nozzle TIG Cups

Features:

- Exceptionally high impact resistance, heat resistance and thermal conductivity.
- Higher heat resistance than lava nozzles.
- Most popular nozzle type in TIG welding.
- Resist splatter build-up.
- Recommended for most welding operations except for use in confined areas.
- Made from high strength alumina.
- Has very good electrical insulating properties.

Material: Alumina

SKU	Nozzle Size	Orifice Opening Size	Length	Type
900-2304-0082	8	1/2 in	1-5/8 in	Nozzle - Airco® Style
900-54N14L	8	1/2 in	3 in	Medium Gas Lens
900-57N74L	8	1/2 in	2-3/4 in	Large Gas Lens
900-57N74XL	8	1/2 in	3-1/4 in	Large Gas Lens
900-14N61-10	10	5/8 in	1-1/4 in	Standard
900-2304-0078	10	1/4 in	1-9/16 in	Plasma Cutting Nozzle
900-A796F76	5	5/16 in	2-1/2 in	Standard Long
900-10N44	12	3/4 in	1-7/8 in	Standard
900-10N45	10	5/8 in	1-7/8 in	Standard
900-10N46	8	1/2 in	1-7/8 in	Standard
900-10N47	7	7/16 in	1-7/8 in	Standard
900-10N47L	7	7/16 in	3 in	Long
900-10N48	6	3/8 in	1-7/8 in	Standard
900-10N48L	6	3/8 in	3 in	Long
900-10N49	5	5/16 in	1-7/8 in	Standard
900-10N49L	5	5/16 in	3 in	Long
900-10N50	4	1/4 in	1-7/8 in	Standard
900-13N08	4	1/4 in	1-3/16 in	Standard
900-13N09	5	5/16 in	1-3/16 in	Standard
900-13N10	6	3/8 in	1-3/16 in	Standard
900-13N11	7	7/16 in	1-3/16 in	Standard
900-13N12	8	1/2 in	1-3/16 in	Standard
900-13N13	10	5/8 in	1-3/16 in	Standard
900-2304-0081	6	3/8 in	1-5/8 in	Nozzle - Airco® Style
900-53N58	4	1/4 in	1 in	Small Gas Lens
900-53N59	5	5/16 in	1 in	Small Gas Lens
900-53N60	6	3/8 in	1 in	Gas Lens
900-53N61	7	7/16 in	1 in	Gas Lens
900-53N61S	8	1/2 in	1 in	Small Gas Lens
900-53N87	12	3/4 in	1-7/8 in	Large Gas Lens
900-53N88	10	5/8 in	1-7/8 in	Large Gas Lens
900-53N88L	10	5/8 in	2-3/4 in	Large Gas Lens Long
900-53N89	15	15/16 in	1-3/8 in	Large Gas Lens
900-54N14	8	1/2 in	1-5/8 in	Gas Lens
900-54N15	7	7/16 in	1-5/8 in	Gas Lens
900-54N16	6	3/8 in	1-5/8 in	Gas Lens
900-54N16L	6	3/8 in	3 in	Medium Gas Lens
900-54N17	5	5/16 in	1-5/8 in	Gas Lens
900-54N18	4	1/4 in	1-5/8 in	Gas Lens
900-54N19	10	5/8 in	1-1/8 in	Medium Gas Lens
900-57N74	8	1/2 in	1-7/8 in	Large Gas Lens
900-57N75	6	3/8 in	1-7/8 in	Large Gas Lens
900-57N75L	6	3/8 in	2-3/4 in	Large Gas Lens Long
900-2304-0072	5	0.04 in	1-1/8 in	Nozzle - Airco® Style



TIG Hook-Up Kits

Features:

- Includes hose and other accessories.
- Hose is either air-cooled or water-cooled rubber.

SKU	Length
900-HK-2	12.5 ft Gas Hose; 18 in Gas Hose
900-HK-1	12.5 ft Water and Gas Hoses
900-HK-3	12.5 ft Gas Hose; 18 in Gas Hose



TIG Ground Cables

Features:

- Industry standard part number is easily recognizable.
- Heavy-duty construction.

SKU	Type	Length
900-GCD-15	Dinse Connectors	15 ft
900-GCS-15	Stud Terminals	15 ft



TIG Extension Kits

Features:

- Industry standard part number is easily recognizable.
- Heavy-duty construction.

SKU	Type	Length	Material
900-EK-1-25	18, 20, 22 Series	25 ft	Vinyl
900-EK-1-25-R	18, 20, 22 Series	25 ft	Rubber
900-EK-26-25-R	26 Series	25 ft	Rubber
900-EK-2-25-R	9, 17 Series	25 ft	Rubber



TIG Extension Cables and Hoses

Features:

- Industry standard part number is easily recognizable.
- Heavy duty construction.

SKU	Length	Material
900-40V76	12.5 ft	Vinyl
900-40V76L	25 ft	Vinyl
900-40V77R	12.5 ft	Rubber
900-40V76R	12.5 ft	Rubber
900-40V77	12.5 ft	Vinyl
900-40V76LR	25 ft	Rubber
900-40V77L	25 ft	Vinyl
900-40V77LR	25 ft	Rubber
900-40V78	12.5 ft	Vinyl
900-40V78L	25 ft	Vinyl
900-40V78R	12.5 ft	Rubber
900-40V78LR	25 ft	Rubber



TIG Gas Hoses

Features:

- Industry standard part number is easily recognizable.

SKU	Length	Material
900-40V75	12.5 ft	Vinyl
900-40V75R	12.5 ft	Braided Rubber
900-40V82R-3	3 ft	Rubber
900-41V30	25 ft	Vinyl
900-41V30R	25 ft	Braided Rubber
900-45V09	12.5 ft	Vinyl
900-45V10	25 ft	Vinyl
900-45V10R	25 ft	Braided Rubber
900-40V82RL	25 ft	Rubber



TIG Power Cables

Features:

- One-piece power cable.
- Heavy-duty construction.
- Works well with a wide range of TIG welding machines.

SKU	Length	Material
900-40V64R	12.5 ft	Rubber
900-40V84R-3	3 ft	Rubber
900-45V03	12.5 ft	Vinyl
900-45V03R	12.5 ft	Braided Rubber
900-45V04	25 ft	Vinyl
900-45V04R	25 ft	Braided Rubber
900-57Y01R	12.5 ft	Rubber
900-57Y03-2	25 ft	Braided Gas Hose
900-57Y03R	25 ft	Rubber
900-57Y03R-50	50 ft	Rubber
900-40V64P	12.5 ft	Rubber
900-40V84R	12.5 ft	Rubber
900-40V84RL	25 ft	Rubber



TIG Power Cable and Hose Repair Kits

Features:

- High quality repair parts.
- Heavy duty construction.

SKU	Style	Used on Torch(es)
900-ZCRK20	250 A; Water Cooled	20; 20F; 20M; 22A; 22B
900-ZCRK26	200 A; Air Cooled	26; 26F; 26FV; 26V
900-ZCRK18	350 A; Water Cooled	18; 18F; 18FV; 18V
900-ZCRK17	125 A; 150 A; Air Cooled	9; 9F; 9FV; 9V; 17; 17F; 17FV; 17V
900-ZHRKG20	250 A; Water Cooled	20; 20F; 20M; 22A; 22B
900-ZCRK17-2	125 A; 150 A; Air Cooled	9; 9F; 9FV; 9V; 17; 17F; 17FV; 17V
900-ZCRK26-2	200 A; Air Cooled	26; 26F; 26FV; 26V
900-ZHRKW20	250 A; Water Cooled	20; 20F; 20M; 22A; 22B

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



TIG Water Hoses

Features:

- Industry standard part number is easily recognizable.
- Heavy duty construction.

SKU	Length	Material
900-40V74R	12.5 ft	Braided Rubber
900-40V74	12.5 ft	Vinyl
900-41V32	25 ft	Vinyl
900-41V32R	25 ft	Braided Rubber
900-45V07R	12.5 ft	Braided Rubber
900-45V08	25 ft	Vinyl
900-45V08R	25 ft	Braided Rubber
900-40V83R	12.5 ft	Rubber
900-40V83R-3	3 ft	Rubber
900-40V83RL	25 ft	Rubber



1.5% Lanthanated Tungsten Electrodes

Features:

- Non-radioactive substitute for 2% thoriated tungsten.
- Similar characteristics to ceriated tungsten.

Material: 1.5% Lanthanated

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-0407GL	0.040 in	7 in
900-1167GL	1/16 in	7 in
900-187GL	1/8 in	7 in
900-3167GL	3/16 in	7 in
900-3323GL	3/32 in	3 in
900-3327GL	3/32 in	7 in
900-5327GL	5/32 in	7 in



2% Ceriated Ground Tungsten Electrodes

Features:

- Different electrical characteristics from thoriated.
- Long lasting.

Material: 2% Ceria Ground

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-0407GC2	0.040 in	7 in
900-1167GC2	1/16 in	7 in
900-187GC2	1/8 in	7 in
900-3167GC2	3/16 in	7 in
900-3327GC2	3/32 in	7 in
900-5327GC2	5/32 in	7 in



2% Lanthanated Tungsten Electrodes

Features:

- Non-radioactive substitute for 2% thoriated tungsten.
- Similar characteristics to ceriated tungsten.

Material: 2% Lanthanated

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-5327GL2	5/32 in	7 in
900-1167GL2	1/16 in	7 in
900-187GL2	1/8 in	7 in
900-3167GL2	3/16 in	7 in
900-3327GL2	3/32 in	7 in



2% Thoriated Tungsten Electrodes

Features:

- Thoriated tungsten electrodes are consumed more slowly than other types of TIG electrodes and are the most commonly used type of tungsten electrode.
- They provide good arc starts and good arc stability for moderate-current AC or DC welding on copper, nickel, titanium, and stainless steel.
- The electrodes insert into a compatible TIG torch that is connected to a TIG welder that supplies current to the electrode.

Material: 2% Thoriated

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-1/16-7GT2	1/16 in	7 in
900-3/32-7GT2	3/32 in	7 in
900-1/8-7GT2	1/8 in	7 in



E3 Tungsten Electrodes

Features:

- Longer life than thoriated electrodes.
- Non-radioactive additives.
- Can be used in both AC and DC processes.
- Excellent arc starting and stability.
- Reduce amperage by 50 recalibrate from other tungsten.

Material: E3

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-3/16X7E3	3/16 in	7 in
900-3/32X7E3-3	3/32 in	7 in
900-0407GE3	0.040 in	7 in
900-1/167GE3	1/16 in	7 in
900-1/167GE3-3	1/16 in	7 in
900-1/818GE3	1/8 in	18 in
900-1/87GE3	1/8 in	7 in
900-1/8-7E3-3	1/8 in	7 in
900-3/3212GE3	3/32 in	12 in
900-3/3218GE3	3/32 in	18 in
900-3/327GE3	3/32 in	7 in
900-5/327GE3	5/32 in	7 in



Pure Ground Tungsten Electrodes

Features:

- Generally used in the welding of aluminum or magnesium.
- Good arc starting stability when used with AC.
- Tip forms clean balled end.

Material: Pure Ground

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-0407G	0.040 in	7 in
900-1/163G	1/16 in	3 in
900-1/167G	1/16 in	7 in
900-1/83G	1/8 in	3 in
900-1/87G	1/8 in	7 in
900-1/87G-3	1/8 in	7 in
900-3/167G	3/16 in	7 in
900-3/323G	3/32 in	3 in
900-3/327G	3/32 in	7 in
900-3/327G-3	3/32 in	7 in
900-5/327G	5/32 in	7 in



Zirconiated Ground Tungsten Electrodes

Features:

- Typically used for welding with higher AC currents on nonferrous metals.
- Also used for high speed welding.

Material: Zirconiated Ground

Type: TIG Tungsten Electrode

SKU	Dia.	Length
900-3/32X3ZG	3/32 in	3 in
900-1/167GZ	1/16 in	7 in
900-1/87GZ	1/8 in	7 in
900-3/327GZ	3/32 in	7 in



Chemical Sharpeners

Features:

- Over 500 perfect sharpenings, without grinding, without leaving work area, and without contaminating Tungsten.
- Tungsten points sharpened by grinders are subjected to chipping and over grinding.
- Eliminates the probability of chipping, extends life of points 2 to 4 times and produces a PERFECT point every time.

SKU	Type
900-CHEM-SHARP-JAR	Chemical Sharpener



TIG Torch and Machine Parts

Features:

- Replacement part for TIG welding torches and machines.
- Reliable quality.

SKU	Type	Used on Torch(es)
900-98W18	O-Ring	17; 18; 26
900-98W77	O-Ring	9; 20
900-105Z55	Handle; Smooth; Threaded	9FMT; 9FVMT; 17FMT; 24FMT; 24FVMT; 150M; HP17; HP24
900-105Z55R	Handle; Ribbed; Threaded	9FMT; 9FVMT; 17FMT; 24FMT; 24FVMT; 150M; HP17; HP24
900-53N04	Hose Clamp	20; 24; 225M
900-53N06	Handle; Smooth; Threaded	20; 225M; HP9; HP20
900-54N67	Screen; Coarse Mesh	HW-17; Gas Lens
900-H-100	Handle; Smooth; Push On	9; 17; 20; 24
900-H-100R	Handle	9; 17; 24
900-H-200	Handle; Smooth; Push On	18; 26
900-H-200R	Handle; Ribbed; Push On	26
900-SW-1	Momentary Bulb Switch	9; 9FMT; 17; 17FMT; 18; 20; 24; 24FMT; 26; 26FMT; 150M; 200M; 225M
900-SW-1F	Momentary Flat Switch	9; 9FMT; 17; 17FMT; 18; 20; 24; 24FMT; 26; 26FMT; 150M; 200M; 225M
900-VS-1	Valve Stem	200M; 26; 26V; 26FMT; 26FVMT
900-VS-2	Valve Stem	9; 9FMT; 17; 17FMT; 18; 24; 24FMT; 150M




Tig Torch Stand Magnetic Base

Features:

- Helps keep torch away from table clutter.
- Protects torch head from inadvertent damage.
- Magnetic base offers great flexibility as it attaches to any steel surface.
- Magnetic base prevents slippage of stand.

SKU	Used on Torch(es)	Type
900-BW-MTTS	Tig Torches	Welding Accessory



Tungsten Grinder Parts

Features:

- Replacement part for tungsten grinding machine.
- Reliable quality.

SKU	Size	Type
900-44510172	5/64 in	Electrode Clamp
900-44510174	5/32 in	Electrode Clamp
900-44510164	3/32 in	Electrode Clamp
900-44510171	1/25 in	Electrode Clamp
900-44510165	1/8 in	Electrode Clamp
900-W95/1-12	8 oz	Grinding Liquid
900-W95/1-40-1	1 gal	Grinding Fluid
900-44490512	3.90 in	Wet Tungsten Grinding Wheel
900-W95/1-05-1	3.90 in H x 0.20 in W	Wet Tungsten Grinding Wheel
900-W95/1-05-2	3.90 in H x 0.28 in W	Wet Tungsten Grinding Wheel
900-W95/1-45	1 gal	Liquid Containing Dust Receiving Bottle



Wet Tungsten Grinders

Features:

- Wet diamond grinding for a smooth finish.
- Minimal waste of tungsten electrodes.
- Stand organizes electrode clamps and electrode holders.
- Correct longitudinal grinding of electrode.
- Adjustable tip flattening.

SKU	Type
900-88897030	Wet Tungsten Grinder




Wet Tungsten Grinders/Cutters

Features:

- Wet diamond grinding for a smooth finish.
- Minimal waste of tungsten electrodes.
- Stand organizes electrode clamps and electrode holders.
- Correct longitudinal grinding of electrode.
- Adjustable tip flattening.
- Cuts electrode lengths from 6-1/8 in to 5/16 in.

SKU	Type
900-88897530	Wet Tungsten Grinder/Cutter

TIG Welding Wires




E308L TIG SMAW Stick Electrodes

Features:

- Extra low carbon electrode for the welding of type 304L, 321, and 347 stainless steels.
- Controlled ferrite in the weld deposit gives excellent notch toughness at cryogenic temperatures.
- Deposits a max of 4% carbon in the weld metal to minimize the formation of chromium carbides and consequent susceptibility to intergranular corrosion.
- Used on food and pharmaceutical equipment, also for architectural fabrication.

Wt.: 5 lb

SKU	Tensile Strength	Material	Dia.
900-308L18X16X5	75 min kpsi	Stainless Steel	1/8 in
900-308L332X16X5	75 min kpsi	Stainless Steel	3/32 in

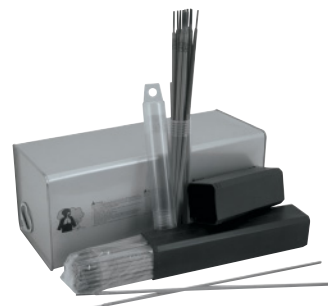

ER308L TIG Welding Rods

Features:

- Used for welding types 304, 304L, 308 and 308L stainless steels.
- Very similar to type 308 but has a carbon content held to a max of 0.03% to avoid carbide precipitation.

Wt.: 10 lb

SKU	Tensile Strength	Material	Dia.
900-308L035x36x10	84 kpsi	Stainless Steel	0.035 in
900-308L045X36x10	84 kpsi	Stainless Steel	0.045 in
900-308L116X36x10	84 kpsi	Stainless Steel	1/16 in
900-308L18X36x10	84 kpsi	Stainless Steel	1/8 in
900-308L332x36x10	84 kpsi	Stainless Steel	3/32 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



ER309L TIG Welding Rods

Features:

- Similar to type 309 except for the carbon content being lower than .03%.
- Extra low carbon content provides good resistance to carbide precipitation and intergranular corrosion.
- Works well for dissimilar joints that undergo heat treatment.

Wt.: 10 lb

SKU	Tensile Strength	Material	Dia.
900-309L116X36x10	86 kpsi	Stainless Steel	1/6 in
900-309L18X36x10	86 kpsi	Stainless Steel	1/8 in
900-309L332X36x10	86 kpsi	Stainless Steel	3/32 in



ER316L TIG Welding Rods

Features:

- Used for welding types 316 and 316L stainless steels.
- Maximum carbon content of 0.03% to reduce the possibility of formation of intergranular carbide precipitation.
- Primarily used for welding low carbon molybdenum bearing austenitic alloys.

SKU	Tensile Strength	Material	Dia.
900-316L116X36x10	55 ksi	Stainless Steel	1/16 in
900-316L18X36x10	55 ksi	Stainless Steel	1/8 in
900-316L332X36x10	55 ksi	Stainless Steel	3/32 in
900-316L532x36x10	55 ksi	Stainless Steel	5/32 in



ER4043 TIG Welding Rods

Features:

- One of the oldest and most widely used welding and brazing alloys.
- Contains silicon additives, which result in improved fluidity (wetting action) of the weld pool.
- Also produces a weld less sensitive to cracking.
- Can be used to weld various grades of aluminum.

SKU	Material	Dia.	Wt.
900-4043-18X36X1	Aluminum; Aluminum Alloy	1/8 in	1 lb
900-4043-116X36X10	Aluminum; Aluminum Alloy	1/16 in	10 lb
900-4043-18X36X10	Aluminum; Aluminum Alloy	1/8 in	10 lb
900-4043-332X36X10	Aluminum; Aluminum Alloy	3/32 in	10 lb
900-4043-532X36X10	Aluminum; Aluminum Alloy	5/32 in	10 lb



ER5356 TIG Welding Rods

Features:

- General-purpose type aluminum alloy which is typically chosen for its relatively high shear strength.
- Offers excellent corrosion resistance when exposed to salt water.
- Should be considered for welding 5000 series aluminum base metals.

Wt.: 10 lb

SKU	Tensile Strength	Material	Dia.
900-5356-116X36X10	38 kpsi	Aluminum; Aluminum Alloy	1/16 in
900-5356-18X36X10	38 kpsi	Aluminum; Aluminum Alloy	1/8 in
900-5356-332X36X10	38 kpsi	Aluminum; Aluminum Alloy	3/32 in




ER70S-6 TIG Welding Rods

Features:

- High quality welds when used on dirty, oily, or rusty steel.
- Creates a smooth bead appearance resulting in minimal post-weld grinding.
- Provides porosity free, x-ray quality weld.

Wt.: 10 lb

SKU	Tensile Strength	Material	Dia.
900-70S6116X36X10	550 MPa	Carbon Steel	1/16 in
900-70S618X36X10	550 MPa	Carbon Steel	1/8 in
900-70S6332X36X10	550 MPa	Carbon Steel	3/32 in
900-70S6532X36X10	77 psi	Carbon Steel	5/32 in



ER70S2-36 TIG Welding Rods

Features:

- For welding on all grades of mild and carbon steels with minimal porosity.
- Triple deoxidized wire (Zirconium, Titanium, and Aluminum) makes excellent choice for welding over rust and mill scale.

SKU	Tensile Strength	Material	Dia.
900-70S2116X36X10	58 kpsi	Carbon Steel	1/16 in
900-70S218X36X10	58 kpsi	Carbon Steel	1/8 in
900-70S2332X36X10	58 kpsi	Carbon Steel	3/32 in

Solder Alloys & Fluxes




A5.7 Silicon Bronze Filler Metals

Features:

- Primarily used for MIG, TIG, and gas welding of copper, copper-silicon and copper-zinc base metals to themselves and to steel.
- Ideal choice for joining plain or galvanized sheet metal as well as other coated metals.

Applicable Materials: Copper; Copper-Silicon; Copper-Zinc

SKU	Capacity Wt.	Dia
900-SILBRZ116X36-10	10 lb	1/16 in
900-SILBRZ18X36X10	10 lb	1/8 in

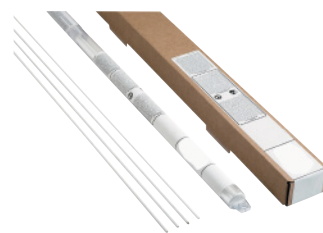

A5.8 Low Fuming Bronze Filler Metals

Features:

- Low melting point makes it easily machinable and excellent for sheet metal work.
- High tensile strength and good ductility.
- Versatile, suitable for general purpose applications.



Applicable Materials: Copper Alloys; Nickel Alloys; Stainless Steel; Steel

SKU	Capacity Wt.	Dia
900-BRZFLX18X36X1	1 lb	1/8 in
900-BRZFLX18X36X10	10 lb	1/8 in
900-BRZFLX332X36X1	1 lb	3/32 in
900-BRZFLX332X36X10	10 lb	3/32 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Welding Stick Electrodes

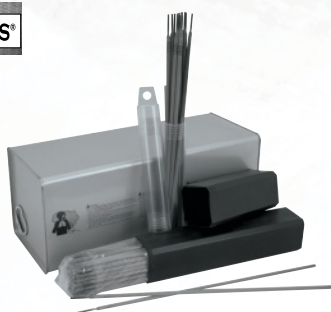

Mild Steel Electrodes

Features:

- Excellent arc starting and stability.
- For best performance, store in rod oven at recommended temperature.

Material: Carbon Steel

Length: 14 in

SKU	Type	Dia
900-6011-532X50	E6011	5/32 in
900-6010-18X5	E6010	1/8 in
900-6010-332X5	E6010	3/32 in
900-6010-532X5	E6010	5/32 in
900-6011-18X5	E6011	1/8 in
900-6011-18X50	E6011	1/8 in
900-6011-332X5	E6011	3/32 in
900-6011-532X5	E6011	5/32 in
900-6013-18X5	E6013	1/8 in
900-6013-18X50	E6013	1/8 in
900-6013-332X5	E6013	3/32 in
900-6013-532X5	E6013	5/32 in
900-7014-18X5	E7014	1/8 in
900-7014-18X50	E7014	1/8 in
900-7014-332X5	E7014	3/32 in
900-7018-18X5	E7018	1/8 in
900-7018-18X50	E7018	1/8 in
900-7018-332X5	E7018	3/32 in
900-7018-332X50	E7018	3/32 in
900-7018-532X5	E7018	5/32 in
900-7018-532X50	E7018	5/32 in
900-7018AC18X5	E7018AC	1/8 in
900-7018AC332X5	E7018AC	3/32 in
900-7024-18X50	E7024	1/8 in
900-7024-532X5	E7024	5/32 in
900-6010-18X50	E6010	1/8 in
900-6010-332X50	E6010	3/32 in
900-6011-332X50	E6011	3/32 in
900-6013-332X50	E6013	3/32 in

Welding/Brazing Alloys & Fluxes



55 Nickel Welding Electrodes

Features:

- Designed for welding gray iron castings to themselves as well as joining them to mild steel.
- Can also be used to repair castings.
- A preheat and interpass temperature of at least 350°F is required during welding.

Type: Welding Electrode

Tensile Strength: 58 to 84 ksi

Wt.: 1 lb

SKU	Material	Dia.	Length
900-55NI18X1	55 Nickel	1/8 in	14 in
900-55NI332X1	55 Nickel	3/32 in	12 in



99 Nickel Welding Electrodes

Features:

- Designed for welding gray iron castings to themselves as well as joining them to mild steel.
- Can also be used to repair castings.
- A preheat and interpass temperature of at least 350°F is required during welding.

Tensile Strength: 58 to 84 ksi

SKU	Material	Dia.	Length
900-99NI18X1	99 Nickel	1/8 in	14 in
900-99NI332X1	99 Nickel	3/32 in	12 in



E71T-11 Flux Cored Welding Wires

Features:

- Limited multi-pass, all position, flux cored welding wire designed to weld carbon steel.
- Shielding gas is not required.
- Produces smooth arc action, low spatter, full slag coverage, and easy slag removal.

SKU	Material	Dia.	Tensile Strength
900-71T11030X10	E71T-11 Alloy	0.030 in	70 ksi
900-71T11035X10	E71T-11 Alloy	0.035 in	70 to 90 kpsi



E71T-GS Flux Cored Welding Wires

Features:

- All position, single pass, flux cored welding wire designed to weld carbon steel.
- Shielding gas is not required.
- Produces smooth arc action, low spatter, full slag coverage, and easy slag removal.

SKU	Material	Dia.	Tensile Strength	Wt.
900-71TGS030X10	E71T-GS Alloy	0.030 in	70,000 psi	10 lb
900-71TGS030X2	E71T-GS Alloy	0.030 in	70,000 psi	2 lb
900-71TGS035X10	E71T-GS Alloy	0.035 in	70,000 psi	10 lb
900-71TGS035X2	E71T-GS Alloy	0.035 in	70,000 psi	2 lb
900-71TGS045X10	E71T-GS Alloy	0.045 in	70,000 psi	10 lb
900-71TGS045X2	E71T-GS Alloy	0.045 in	70,000 psi	2 lb
900-71TGS035X33	E71T-GS Alloy	0.035 in	86400 psi	33 lb
900-71TGS045X33	E71T-GS Alloy	0.045 in	86400 psi	33 lb



R45 Carbon Steel Solid Welding Rods

Features:

- General purpose, copper coated oxy-acetylene gas welding rod used for welding low carbon steels up to 1/4 in thick.
- Great selection when ductility and machinability are most important.
- No need for a flux when brazing with this product.

Length: 36 in

Tensile Strength: 45 ksi

SKU	Material	Dia.	Packing Type	Wt.
900-RG4518x36X1	R45 Alloy	1/8 in	Tube	1 lb
900-RG4518x36x10	R45 Alloy	1/8 in	Carton	10 lb
900-RG45332x36X1	R45 Alloy	3/32 in	Tube	1 lb
900-RG45332x36x10	R45 Alloy	3/32 in	Carton	10 lb



RG60 Gas Welding Rods

Features:

- Moly alloyed, high strength, oxy-acetylene gas welding rod used for gas brazing of low carbon and low alloy steels.
- Used in applications where a high tensile strength is needed.
- The high silicon and manganese content in the product eliminates the need for flux when welding.

Length: 36 in

Tensile Strength: 60 ksi



Wt.: 10 lb

SKU	Material	Dia.
900-RG6018x36x10	R60 Alloy	1/8 in
900-RG60316x36x10	R60 Alloy	3/16 in
900-RG60332x36x10	R60 Alloy	3/32 in
900-RG60532x36x10	R60 Alloy	5/32 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Arc Gouging Electrodes

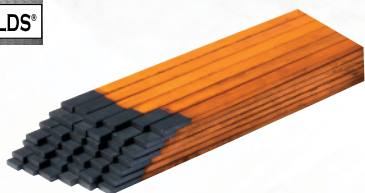

DC Air Carbon Gouging Electrodes

Features:

- New formula with all synthetic graphite.
- Superb arc starting and stability.
- Uniform diameters.

Length: 12 in

Model Type: Flat

SKU	Dia.	Thickness
900-35-099-003X	3/8 in	5/32 in
900-35-033-003X	5/8 in	3/16 in



DC Copperclad Gouging Electrodes

Features:

- Full synthetic graphite.
- Superb arc starting and stability.

SKU	Amps	Coating	Dia.	Length	Model Type
900-22-023-003X	60 A - 90 A	Copper	1/8 in	12 in	Pointed
900-22-033-003X	200 A - 250 A	Copper	3/16 in	12 in	Pointed
900-22-043-003X	300 A - 400 A	Copper	1/4 in	12 in	Pointed
900-22-053-003X	350 A - 450 A	Copper	5/16 in	12 in	Pointed
900-22-063-003X	450 A - 600 A	Copper	3/8 in	12 in	Pointed
900-22-082-003X	800 A - 1000 A	Copper	1/2 in	14 in	Pointed
900-22-983-003X	90 A - 150 A	Copper	5/32 in	12 in	Pointed
900-24-064-003X	450 A - 600 A	Copper	3/8 in	17 in	Jointed
900-24-084-003X	800 A - 1000 A	Copper	1/2 in	17 in	Jointed
900-24-104-003X	1000 A - 1250 A	Copper	5/8 in	17 in	Jointed

Rod Holders



200 Rod Bags

Features:

- Constructed of heavy duty barktan strap leather.
- Heavy duty steel rivets and hardwood bottom.
- Includes leather divider for organization and belt loop.
- Convenient for keeping rods.

SKU	Capacity Wt.	Material
902-200	10 lb	Saddle Leather



75 Rod Bags

Features:

- Belt loop.
- Double leather bottom.
- Sewn and riveted.
- Convenient for keeping rods.

SKU	Capacity Wt.	Material
902-75	5 lb	Side Split Cowhide



Rod Bags

Features:

- Double leather construction.
- Kevlar® stitching.
- Holds up to five pounds rods.

SKU	Capacity Wt.	Material
902-Q-14	5 lb	Leather



Rod Storage Tubes

Features:

- Easy way to store and organize all of your filler metals properly.
- 1/8-inch nominal wall thickness for superior strength and durability.
- Neoprene seal keeps your rods air and water tight.
- Each rod storage tube comes with a key tag to identify the contents.
- Made of high impact polyethylene.
- Available in a variety of lengths and colors.
- Increase tube to accommodate 1-meter rods with 3-inch extension (BW36-BLA-EXT) sold separately.

SKU	Capacity Wt.	Material	Color
900-BW14-BLU	10 lb	High Impact Polyethylene	Blue
900-BW14-BLA	10 lb	High Impact Polyethylene	Black
900-BW14-GRE	10 lb	High Impact Polyethylene	Green
900-BW14-PIN	10 lb	High Impact Polyethylene	Pink
900-BW36-GRE	10 lb	High Impact Polyethylene	Green
900-BW36-PUR	10 lb	High Impact Polyethylene	Purple
900-BW14-PUR	10 lb	High Impact Polyethylene	Purple
900-BW36-BLA	10 lb	High Impact Polyethylene	Black
900-BW14-RED	10 lb	High Impact Polyethylene	Red
900-BW36-PIN	10 lb	High Impact Polyethylene	Pink
900-BW36-RED	10 lb	High Impact Polyethylene	Red
900-BW14-BRO	10 lb	High Impact Polyethylene	Brown
900-BW18-BLU	10 lb	High Impact Polyethylene	Blue
900-BW36-BLU	10 lb	High Impact Polyethylene	Blue



Rod-RAK Canister Storage Racks

Features:

- Filler metal organizer for 14 in and 36 in Rod Storage Tubes.
- Holds 5 each 36 in length TIG/GAS rod storage tubes.
- Pre-drilled holes for easy mounting.
- 16 GA cold rolled – A1008 steel construction.
- Powder coated satin black.
- Made in USA.

SKU	Material
900-BW-RODRAK-36-5	Steel
900-BW-RODRAK-14-5	Steel

Dry Rod Ovens



Electrode Ovens

Features:

- Includes external thermostat control.
- Each oven is tested and heated to rated temperature before shipping.

Voltage: 110 V


Digital Thermometer: No

SKU	Capacity Wt.	Includes	Watts
900-BW-ELECTRODE-OVEN-ET	10 lb	Analog Thermostat	80 W
900-20LB-ELECTRODE-OVEN	20 lb	Thermostat	220 V
900-50LB-ELECTRODE-OVEN	50 lb	Thermostat	220 V

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.

Anti-Spatter & Chemicals



Anti-Spatters

Features:

- Helps protect MIG gun nozzles, contact tips, accessories and all welding zones during single- and multi-pass welding.
- Non-flammable.
- Reduces spatter build-up on MIG nozzles, prevents spatter adhesion.
- Heat-resistant to withstand high temperature use.
- Paint compatible.
- Contains no silicones, no fluorocarbons.

SKU	Capacity Vol.	Type
905-620-16OZ	16 oz	Anti-Spatter & Nozzle Shield
905-620-24OZ	24 oz	Anti-Spatter
905-D-500-1GAL	1 gal	Anti-Spatter
905-D-500-5GAL	5 gal	Anti-Spatter



Bright Zinc Galvanizing Primers

Features:

- Reduced M.I.G.
- weld spattering.
- Prevents rust and corrosion.
- Protects welded surfaces.
- Repairs Hot Dip Galvanizing with brighter finish.
- Will not blister or burn away.

SKU	Capacity Vol.
905-RW109B-12	12.75 oz



Lube Pad Lubricants

Features:

- Specially formulated to re-lubricate welding wire lube pads.
- Save money by re-using pads.
- Lower production costs by reducing wire feed drag.
- Removes wire dirt, rust and increases tip and liner life.

SKU	Capacity Vol.	Packing Type
905-RW146	8 oz	Bottle



Lube Pads

Features:

- Eliminates erratic wire feed caused by dust particles of flashing being trapped inside conduit lines.
- Contains no solvents, abrasives, carbon, sulfur, nitrogen, moly disulphide or silicon.
- Non-flammable, non-toxic.

SKU	Type
905-LUBE-PAD-6PK-TREATED	Treated Wire Lube Pad
905-LUBE-PAD-6PK-PLAIN	Plain Wire Lube Pad
905-LUBE-PAD-COMBO	Plain/Treated Wire Lube Pads



Nozzle Dip Gels

Features:

- Prevents spatter build up on nozzles and tips.
- Odorless—no unpleasant or harmful odors.

SKU	Capacity Vol.	Packing Type
905-NOZZLE-DIP	16 oz	Jar




Spat Safe Plus Anti-Spatters

Features:

- Prevents spatter adhesion.
- Non-messy formula—washes off easily.
- Environmentally friendly.

SKU	Capacity Vol.	Packing Type
905-630-16OZ	16 oz	Aerosol Can
905-630-1GL	1 gal	Jug

Welding Blankets, Curtains, & Rolls



Curtain Frames

Features:

- Freestanding, portable curtain frame is easy to assemble and can be used individually or in multiple units to form various configurations.
- Providing sturdiness and strength, square steel tubing and bolted bracket system prevent slipping and twisting.
- Combined with Best Welds safety fabrics, curtain frames provide protection for welding areas, machine shops, grinding and other safety applications.
- Quick assembly design.

Material: Steel

Includes: 1 in Square Steel Tubing; Bolted Brackets; 24 in Platform T Legs; Lacing Ties

SKU	Length	Width
902-CURTAIN-FRAME	6 ft	6 ft



Heavyweight Fiberglass Fabric

Features:

- Industry-strength, plain-weave fiberglass fabric with a light clear acrylic coating to minimize fraying and unraveling of cut edges.
- Designed for use in areas where a fabric with high heat resistance is required.
- Protects against light sparks and spatter.

Material: Fiberglass

SKU	Length	Width
902-2400-OR-40	50 yd	40 in

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Roll Goods

Features:

- Protects against light sparks and spatter.
- Grommets and hemmed with fiberglass thread.
- Designed for use in areas where a fabric with high heat resistance is required.

Material: Fiberglass

SKU	Length	Width	Color
902-RG-2025-40	50 yd	40 in	Tan
902-RG-2523RA-40	50 yd	40 in	Red
902-RG-2025-60	50 yd	60 in	Tan
902-RG-2523RA-60	50 yd	60 in	Red





Welding Blankets

Features:

- Protects against light sparks and spatter.
- Grommets and hemmed with high temperature thread.
- Designed for use in areas where a fabric with high heat resistance is required.

SKU	Length	Width	Material
902-2025-18-6x6	6 ft	6 ft	Fiberglass
902-AC2300-24-6X6	6 ft	6 ft	Fiberglass
902-2025-18-6x8	6 ft	8 ft	Fiberglass
902-AC2300-24-6X8	6 ft	8 ft	Fiberglass
902-AC2300-24-6X8BLK	6 ft	8 ft	Fiberglass
902-AC2300-24-8X8	8 ft	8 ft	Fiberglass
902-2025-18-10X10	10 ft	10 ft	Fiberglass
902-AC2300-24-10X10	10 ft	10 ft	Fiberglass
902-1800CFM-16-6X6	6 ft	6 ft	Carbon Fiber
902-1800CFM-16-6X8	6 ft	8 ft	Carbon Fiber



Welding Curtains

Features:

- Heavy duty PVC designed to filter far/near UV radiation and blue light.
- Transparent curtains providing UV and blue light protection when visibility is necessary.
- Curtains are grommets across top and in each corner.
- Hemmed with high temperature thread.

Material: PVC

SKU	Length	Width	Color
902-CURTAIN-5X8-ORG	8 ft	5 ft	Orange
902-CURTAIN-6X6-GRN	6 ft	6 ft	Green
902-CURTAIN-6X6-ORG	6 ft	6 ft	Orange
902-CURTAIN-6X6-YEL	6 ft	6 ft	Yellow
902-CURTAIN-6X8-GRN	8 ft	6 ft	Green
902-CURTAIN-6X8-ORG	8 ft	6 ft	Orange
902-CURTAIN-6X8-YEL	8 ft	6 ft	Yellow
902-CURTAIN-6X10-YEL	10 ft	6 ft	Yellow
902-CURTAIN-6X10-ORG	10 ft	6 ft	Orange

Arc Gouging Torches, Parts, & Cables



Arc Gouging Torch Cables

Features:

- Strong cable made with durable construction.
- Fully interchangeable with other gouging torch brands.

SKU	Cable Length
900-GT70-084-207	7 ft




BEST WELDS®

CURTAIN FRAME

- Freestanding, portable curtain frame is easy to assemble and can be used individually or in multiple units to form various configurations.
- Providing sturdiness and strength, square steel tubing and bolted bracket system prevent slipping and twisting
- Combined with Best Welds safety fabrics, curtain frames provide protection for welding areas, machine shops, grinding and other safety applications.
- Welding curtains sold seperately.

SKU	WIDTH	HEIGHT
902-CURTAIN-FRAME	6 - 8 FT	6 FT

**Expandable
Width Frame**

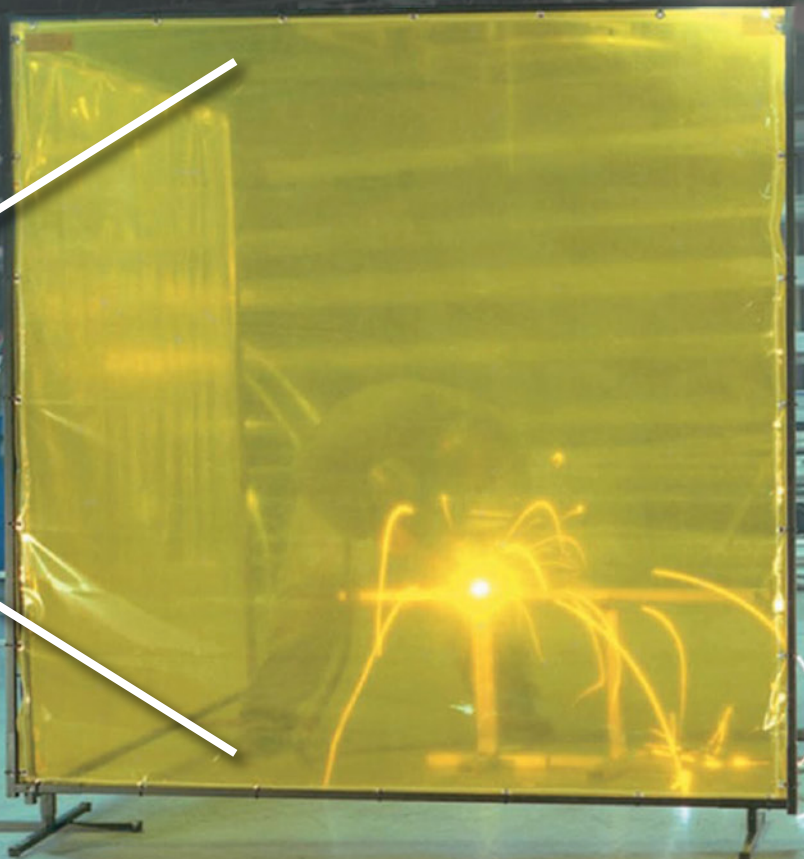



Arc Gouging Torches With Cables

Features:

- Sturdy gouging torch with cable is made with durable construction.
- Fully interchangeable with other gouging torch brands.
- Heavy duty construction, yet lightweight for everyday usage.

SKU	Cable Length	Amps
900-GT61-065-006	7 ft	600 A
900-GT61-082-008	7 ft	1000 A
900-GT61-065-007	10 ft	600 A
900-GT61-082-009	10 ft	1000 A



Arc Gouging Torch Parts

Features:

- Durable construction.
- Fully interchangeable with other gouging torch brands.

SKU	Type	For Model
900-GT94-370-179	Handle	GT-3000
900-GT94-378-366	Head and Screw	GT-3000
900-GT94-433-193	Insulator Assembly with Screws	GT-3000
900-GT94-476-080	Lever Assembly with Screw	GT-3000
900-GT94-103-232	Torch Body	GT-3000
900-GT94-048-088	Upper Arm	GT-4000
900-GT94-103-206	Torch Body	GT-4000
900-GT94-104-012	Bonnet	GT-3000; GT-4000
900-GT94-104-016	Valve with Bonnet	GT-3000; GT-4000
900-GT94-105-014	Insulating Boot	GT-3000; GT-4000
900-GT94-370-163	Handle	GT-4000
900-GT94-378-368	Head and Screw	GT-4000
900-GT94-433-183	Insulator Assembly with Screw	GT-4000
900-GT94-476-066	Lever Assembly with Screw	GT-4000
900-GT94-632-094	Hinge Pin	GT-4000
900-GT94-710-036	O-Ring	GT-3000; GT-4000
900-GT94-800-077	Spring	GT-4000
900-GT94-801-011	Valve with O-Rings	GT-3000; GT-4000

Electrode Holders & Parts



Electrode Holder Parts Tip Insulator 2 Pc Sets

Features:

- Replacement part for electrode holder.
- Made of fiber glass reinforced polyester resin.

SKU	Type
900-TI-4	2-Pc Replacement Tip Insulator
900-TI-5	2-Pc Replacement Tip Insulator



Electrode Holder Magnetic Base

Features:

- Helps keep torch away from table clutter.
- Protects torch head from inadvertent damage.
- Magnetic base offers great flexibility as it attaches to any steel surface.
- Magnetic base prevents slippage of stand.

Cable Cap.: 3/16 in

Length: 5.5 in

Body Material: Magnet; Steel

SKU	Process	Amps
900-BW-MEHS	Manual Metal Arc Welding (Stick/Rod Welding)	300 A



Electrode Holders - High Tong Type

Features:

- Lever designed for better hand clearance and better hold.
- Made from high quality materials for both high conductivity and improved cable connections.
- Ergonomically designed heavy-duty shock-proof nylon handle.

Body Material: Brass

Process: Manual Arc Welding

SKU	Amps	Electrode Cap.	Cable Cap.	Length
900-A-14	350 A	8 mm	2/0	10.04 in
900-A-14-HD	400 A	10 mm	3/0	12.5 in
900-A-316	250 A	4 mm	1/0	9.25 in
900-A-38-HD	500 A	10 mm	3/0	12.60 in
900-A-532	200 A	3.2 mm	#3	8.46 in
900-A-732	300 A	5 mm	1/0	10.04 in
900-A3-S	500 A	4 mm	1/0	9.5 in



Electrode Holders - Stub Type

Features:

- Lightweight and easy to use.
- Better maneuverability-great for tight places.
- Angle-head allows excellent visibility of production work.
- Efficient grooved jaw design insures firm electrode grip.

Electrode Cap.: 6.3 mm

Cable Cap.: 1/0

Length: 8.78 in

Body Material: Brass

Process: Manual Arc Welding

SKU	Amps
900-40-B	400 A



Lever Designed Electrode Holders

Features:


- Lever designed for better hand clearance and better hold.
- Made from high quality materials for both high conductivity and improved cable connections.
- Ergonomically designed heavy-duty shock-proof nylon handle.

Body Material: Brass

Process: Manual Arc Welding

SKU	Amps	Electrode Cap.	Cable Cap.	Length
900-AF-1	150 A	3.2 mm	#3	8.54 in
900-AF-2	200 A	3.2 mm	#3	8.54 in
900-AF-25	250 A	5 mm	1/0	8.54 in
900-AF-3	300 A	5 mm	2/0	10.31 in
900-AF-35	350 A	6.3 mm	2/0	10.31 in
900-AF-50	500 A	10 mm	4/0	12.25 in
900-AW-C	300 A	10 mm	3/0	13 in
900-JH-1	200 A	4 mm	#3	8.35 in

Ground Clamps



CGC Series Ground Clamps

Features:

- Superior clamping pressure.
- High alloy conductor assures maximum conductivity.
- Large contact surface area ensures positive grounding.


Jaw Opening: Up to 3-¼ in

Throat Depth: 2 in

SKU	Cable Cap.
900-CGC-600	1/0-4/0

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Ground Clamps

Features:

- Contoured handle lever for easy jaw opening.
- Large contact area assures positive grounding.
- Conductor body holds the cable securely.

SKU	Amps	Cable Cap.	Jaw Opening
900-GC-500	500 A	4/0	1.5 in
900-GC-200	200 A	1/0	1 in
900-GC-300	300 A	2/0	1 in
900-LGC-200	200 A	1/0	1.5 in
900-LGC-300	300 A	2/0	1.5 in
900-LGC-500	500 A	4/0	1.5 in
900-TGC-200	200 A	1/0	2 in
900-TGC-300	300 A	3/0	2 in
900-TGC-500	500 A	4/0	1 in



Magnetic Ground Clamps

Features:

- Large contact area for optimum electrical contact.
- Superior gripping power.
- Insulated to prevent annealing.

SKU	Amps	Cable Cap.
900-MGC-300	300 A	2; 1/0
900-MGC-500	500 A	2/0 to 3/0



Steel Ground Clamps

Features:

- Galvanized steel plated.
- Large hex screw cable connection assures safe cable connection every time.
- Pure copper braided shunts allows both jaws to carry welding current.

SKU	Amps	Cable Cap.	Jaw Opening	Throat Depth
900-EG-200	200 A	#2	1 in	3.28 in
900-EG-300	300 A	1/0	1.5 in	4.57 in
900-EG-500	500 A	3/0	2 in	6.2 in

Cable Connectors & Lugs




Cable Connectors

Features:

- Designed to efficiently conduct current through detachable-type connection.
- Cam-action design allows lock-in with a twist and pulls the two halves tightly together.
- Metal parts are precision machined from heavy brass extrusion; resists rust and corrosion.
- Molded rubber connector covers have good resistance to heat, cold, abrasion, ozone, oils and solvents.
- Tapered ends lock out moisture, oil, and dirt.
- Male/female connectors are interchangeable with popular like-size competitor models.

Connection Type: Ball Point

SKU	Type	Style	Cable Cap.
900-4-MBP-1	Male Cable Connector	Male	4/0 AWG - 3/0 AWG
900-LC-10-F	LC10 Female Cable Connector	Female	#4 - #1
900-LC-10-M	LC10 Male Cable Connector	Male	#4 - #1
900-LC-40-BULK	LC40 Male and Female Cable Connectors	Male; Female	1/0 - 2/0
900-LC-40F-BULK	LC40 Female Cable Connector	Female	2/0 AWG - 1/0 AWG
900-LC-40M	LC40 Male Cable Connector	Male	1/0 - 2/0
900-LC-40-F	LC40 Female Cable Connector	Female	1/0 - 2/0
900-1-MBP	Male and Female Cable Connectors	Male; Female	#4 - #1
900-1-MBP-1	Male Cable Connector	Male	#4 - #1
900-1-MBP-2	Female Cable Connector	Female	#4 - #1
900-2-MBP	Male and Female Cable Connectors	Male; Female	1/0 - 3/0
900-2-MBP-1	Male Cable Connector	Male	1/0 - 3/0
900-2-MBP-2	Female Cable Connector	Female	1/0 - 3/0
900-4-MBP	Male and Female Cable Connectors	Male; Female	3/0 - 4/0
900-4-MBP-2	Female Cable Connector	Female	3/0 - 4/0
900-LC-10	LC10 Male and Female Cable Connectors	Male; Female	#4 - #1
900-LC-40	LC40 Male and Female Cable Connectors	Male; Female	1/0 - 2/0
900-LC-40M-BULK	LC40 Male Cable Connector	Male	1/0 - 2/0

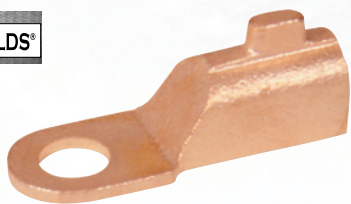

Cable Lugs - Hammer On

Features:

- More robust than a tubular lug.
- No soldering required.
- Heavy duty cast copper for higher amperage.

Connection Type: Hammer On

SKU	Type	Cable Cap.
900-BW-HOL1020	Heavy Duty Hammer-On Cable Lug	1/0 - 2/0
900-BW-HOL2030	Hammer-On Connection Cable Lug	3/0 AWG - 2/0 AWG
900-BW-HOL210	Hammer-On Connection Cable Lug	#2 - 1/0 AWG
900-BW-HOL3040	Hammer-On Connection Cable Lug	4/0 AWG - 3/0 AWG
900-BW-HOL42	Hammer-On Connection Cable Lug	#4 - #2



Dinse Connectors

Features:

- Simple and safe, plug in and tighten with short strong turn.
- Positive stop-lock action and maximum conductivity.
- Connects power cables and gas-auxiliary hose.

SKU	Type
900-DA-26R	Dinse Machine Plug
900-DA-1820L	Dinse Adapter
900-DA-917F	Dinse Machine Plug
900-DP-25M	Dinse Connector for 2-Pc Cable
900-DP-50M	Dinse Connector for 2-Pc Cable
900-DA-917FS	Dinse Machine Plug
900-DA-5095	Euro 10-25 Panel Socket to USA Type MBP-1 (or LC10) Plugs



Dinse In-Line Connectors

Features:

- Dinse in-line connector, for main use with power cables.
- OEM quality TIG consumables are compatible with all major brands.

SKU	Type	Style	Connection Type
900-DI-26R	Dinse Machine Plug	In-Line Hole	7/8 in-14 RH
900-DI-24F	Dinse Machine Plug	In-Line Hole	3/8 in-24 RH
900-DI-26F	Dinse Machine Plug	In-Line Hole	5/8 in-18 RH



Dinse Style Cable Plugs and Sockets


Features:

- International Dinse style cable plug and sockets for use on most welding power sources.
- Simple and safe, plug in and tighten with short strong turn.
- Positive stop-lock action and maximum conductivity.
- Molded rubber connector covers have good resistance to heat, cold, abrasion, ozone, oils, and solvents.
- Tapered ends lock out moisture oil and dirt.
- Male/female connectors are interchangeable with popular like-size competitor models.

SKU	Type	Style	Connection Type	Cable Cap.
900-BK-25	Female Cable Socket	Dinse	Female Cable Socket; Ball Point	#6 - #2
900-BK-50	Female Cable Socket	Dinse	Female Cable Socket; Ball Point	#1 - 1/0 AWG
900-BK-70	Female Cable Socket	Dinse	Female Cable Socket; Ball Point	2/0 AWG - 1/0 AWG
900-BK-95	Female Cable Socket	Dinse	Female Cable Socket; Ball Point	3/0 AWG - 2/0 AWG
900-SK-25	Dinse Male Cable Plug	Male	Male Cable Plug; Ball Point	#6 - #2
900-SK-50	Dinse Male Cable Plug	Male	Male Cable Plug; Ball Point	#1 - 1/0 AWG
900-SK-70	Male Cable Plug	Dinse	Male Cable Plug; Ball Point	2/0 AWG - 1/0 AWG
900-SK-95	Male Cable Plug	Dinse	Male Cable Plug; Ball Point	3/0 AWG - 2/0 AWG

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



Solder On Lugs

Features:

- Precision made from copper tubing.
- Extra long barrel for easy soldering or possible connection.
- Easy to use, flared-end for easy cable access.

Connection Type: Solder On

SKU	Type	Cable Cap.
900-L-1020	Power Cable Lug	1/0 - 2/0
900-L-12	Lug	#2 - #1
900-L-3040	Lug	4/0 AWG - 3/0 AWG
900-L-46	Lug	#6 - #4
900-L-62	Power Cable Lug	#6 - #2
900-L-68	Lug	#8 - #6



Terminal Lugs

Features:

- HD Cast Cu Lug.
- Angle head enables easy connection with Camlock style male connector.
- For use with 2-MBP, 2-MPC, and 4-MPC connectors.

Connection Type: Camlock

SKU	Type
900-2-AF	HD Cast Cu Lug

Cable Covers



Cable Covers with Snaps

Features:

- Convenient snaps secure the cover to the cable assembly.
- Sewn with Kevlar thread.
- Can also be used for extra protection on welding and cutting torches.
- Abrasion resistant.
- Protects gas hoses.

Closure Type: Snap

Material: Leather

Resistance: Heat

SKU	Size Group	Length	Temp Range	Applications
900-5048CC	Large	50 ft	200° F	MIG
900-2038CC	Small	20 ft	200° F	TIG
900-1048CC	Large	10 ft	200° F	MIG
900-10048CC	Large	100 ft	200° F	MIG
900-2048CC	Large	20 ft	200° F	MIG



Cable Covers with Zipper

Features:

- Non-conductive zipper with an overlap flap protects the zipper from weld splatter.
- Special snug-straps serve as a cinching mechanism at both ends of the cable cover.
- Tabs secure the cover to the cable assembly.

Closure Type: Zipper

Material: Black Nylon

Applications: TIG; MIG

Resistance: Abrasion; Chemical; Ultraviolet Light; Tear

SKU	Size Group	Length	Temp Range
900-WC-3-10	Medium	10 ft	2100° F
900-WC-3-22	Medium	22 ft	2100° F
900-WC-4-10	Large	10 ft	2,100° F
900-WC-4-22	Large	22 ft	2,100° F
900-WC-3-50	Medium	50 ft	2,100° F
900-WC-4-50	Large	50 ft	2,100° F



TIG Cable Covers

Features:

- Kevlar® stitching prevents wear and tear due to heat.
- Durable select shoulder split cowhide.

Closure Type: Snap

Temp Range: 1000° F

Material: Leather

Applications: TIG

Resistance: Heat

SKU	Size Group	Length
900-Q-19	Large	22 ft

Welding Clamps, Spreaders & Holders




Cable Hitches

Features:

- Hooked to a support near the work area, the hitch frees the welder from the cable weight.
- It allows the cable to be pulled through but will not let it slip back.

SKU	Material
900-CH-240	Steel



Multi-Purpose Magnetic Holders

Features:

- Enables fast and accurate holding of any ferrous object.
- Can be utilized as double-sided holder for welding and assembly work.
- Will hold sheets or tubes at 45°, 90° and 135° angles.
- Compact design allows use in tight places.

SKU	Capacity Wt.	Length	Width	Height
900-M-063	80 lb	6.3 in	4 in	0.63 in
900-M-065	95 lb	9 in	5 in	0.88 in
900-M-061	45 lb	4-7/10 in	3-2/5 in	14/50 in

Welding Cables & Power Cables



SO Power Cables

Features:

- Oil-resistant jacket.
- Highly flexible.

Style: Multi-Stranded Conductor

Amps: Consult Ampacity Chart

Temp Range: -40° C - 90° C

Jacket Material: TPE

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper

SKU	Cable/Wire Description	Includes	Number of Conductors	Insulation Thickness
911-18363-50	6 AWG x 50 ft	Cable Only	3	0.05 in
911-18364-25	6 AWG x 25 ft	Cable Only	4	0.05 in
911-18364-50	6 AWG x 50 ft	Cable Only	4	0.05 in
911-18383-50	8 AWG x 50 ft	Cable Only	3	0.05 in
911-18384-50	8 AWG x 50 ft	Cable Only	4	0.06 in



SOOW Non UL Power Cables

Features:

- Designed for use with industrial equipment, heavy tools, battery chargers, portable lights, and power extensions.
- Suitable for outdoor use.
- Sunlight, water, oil, and weather resistant.

Temp Range: -40° C - 90° C

Jacket Material: CPE

Insulation Thickness: 0.06 in

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper

SKU	Cable/Wire Description	Amps	Number of Conductors
911-6/3X250	6 AWG x 250 ft	55	3
911-6/4X250	6 AWG x 250 ft	45	4
911-8/3X250	8 AWG x 250 ft	40	3
911-8/4X250	8 AWG x 250 ft	35	4

NOT ALL PRODUCTS ARE STOCKED IN EVERY WAREHOUSE.

The information contained in this flyer is for information purposes only, not for sales, and is subject to change at any time without notice. Certain items may be restricted for sales in certain states.



SOOW Power Cables

Features:

- Extremely flexible.
- Excellent abrasion, ozone, sunlight, chemical and oil resistance.
- Ideal for portable tools and equipment, appliances and machinery with small motors.

Temp Range: -40° C - 90° C

Voltage: 600 V

Insulation: EPDM

SKU	Cable/Wire Description	Jacket Material	Number of Conductors	Conductor Material
911-10/3X250	10 AWG x 250 ft	Carolprene®	3	Copper
911-10/4X250	10 AWG x 250 ft	CPE	4	Stranded Copper
911-12/4X250	12 AWG x 250 ft	Carolprene®	4	Copper
911-14/3X250	14 AWG x 250 ft	Carolprene®	3	Copper
911-16/2X250	16 AWG x 250 ft	CPE	2	Stranded Copper
911-16/4X250	16 AWG x 250 ft	Carolprene®	4	Copper
911-4/4X250	4 AWG x 250 ft	TPE	4	Copper



Welding Cable Assemblies

Features:

- Foot markings are printed on cable jacket so you can cut to the precise length without measuring.
- Flexible bare copper wire stranding.
- Tough jacket resists abrasion and chemicals.

Jacket Material: EPDM

Voltage: 600 V

SKU	Cable/Wire Description	Insulation Thickness
LC40 Connectors		
911-2/0-100-LC40	2/0 AWG x 100 ft	0.08 in
2MPC Connectors		
911-2/0-100-2MPC	2/0 AWG x 100 ft	0.08 in
2MBP Connectors		
911-2/0-50-2MBP	2/0 AWG x 50 ft	0.08 in
911-EC15-1/0DMPH-200	1/0 AWG x 15 ft	0.08 in
911-GC50-2/0TMTG-300	2/0 AWG x 50 ft	0.08 in
911-GC15-1/0SK70GC-300	1/0 AWG x 15 ft	0.08 in
911-2-15-BW/LE-H25-M	2 AWG x 15 ft	0.06 in
911-1/0-50-2MPC	1/0 AWG x 50 ft	0.08 in
911-1/0-50-LC40	1/0 AWG x 50 ft	0.08 in
911-2/0-50-2MPC	2/0 AWG x 50 ft	0.08 in
911-2/0-50-EH58-67	2/0 AWG x 50 ft	0.08 in
911-2/0-50-GC60-67	2/0 AWG x 50 ft	0.08 in
911-2/0-50-LC40	2/0 AWG x 50 ft	0.08 in



Welding Cable Kits

Features:

- Chemical and abrasion resistant.
- Sequentially marked every foot.
- Ultra flexible cable.
- Made in USA.

Style: MBP

Temp Range: 58° F - 221° F

Jacket Material: EPDM

Number of Conductors: 1

Insulation Thickness: 0.08 in

Voltage: 600 V

Insulation: EPDM

Conductor Material: Copper

SKU	Cable/Wire Description	Includes
911-2/0-100-2mbp	2/0 AWG x 100 ft	1 Male Connector; 1 Female Connector; Welding Cable



Whip Cables

Features:

- Class M stranding provides the ultimate in flexibility.
- EPR insulation provides outstanding cut and abrasion resistance.
- Resistant to oil, chemicals, water and solvents.

Jacket Material: EPDM

Number of Conductors: 1

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper

SKU	Cable/Wire Description	Style	Insulation Thickness
911-10614X12	1 AWG x 12 ft	Best Welds®	0.06 in
911-10615X12	1/0 AWG x 12 ft	Best Welds®	0.08 in
911-10613X12	2 AWG x 12 ft	Best Welds®	0.06 in
911-10613-250	2 AWG x 250 ft	Whip Cable	0.06 in
911-10614-250	1 AWG x 250 ft	Whip Cable	0.06 in
911-10615-250	1/0 AWG x 250 ft	Best Welds®	0.08 in
911-10618-250	2/0 AWG x 250 ft	Whip Cable	0.08 in



Welding Cables

Features:

- Custom lengths available.
- Custom assemblies available.
- Resistant to oil, chemicals, and solvents.

Amps: Consult Ampacity Chart

Number of Conductors: 1

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper

SKU	Cable/Wire Description	Includes	Jacket Material	Insulation Thickness
911-4/0-1000	4/0 AWG x 1,000 ft	Cable Only	EPDM	0.08 in
911-4-1000	4 AWG x 1,000 ft	Cable Only	EPDM	0.06 in
911-3/0x100	3/0 AWG x 100 ft	Cable Only	EPDM	0.08 in
911-2/0X100-BOXED	2/0 AWG x 100 ft	Cable Only	EPDM	0.08 in
911-2/0X50-BOXED	2/0 AWG x 50 ft	Cable Only	EPDM	0.08 in
911-4/0X50-BOXED	4/0 AWG x 50 ft	Cable Only	EPDM	0.08 in
911-1X100-BOXED	1 AWG x 100 ft	Cable Only	EPDM	0.06 in
911-2X100-BOXED	2 AWG x 100 ft	Cable Only	EPDM	0.06 in
911-4X100-BOXED	4 AWG x 100 ft	Cable Only	EPDM	0.06 in
911-4X50-BOXED	4 AWG x 50 ft	Cable Only	EPDM	0.06 in
911-1/0X50-BOXED	1/0 AWG x 50 ft	Cable Only	EPDM	0.08 in
911-1X50-BOXED	1 AWG x 50 ft	Cable Only	EPDM	0.06 in
911-2X50-BOXED	2 AWG x 50 ft	Cable Only	EPDM	0.06 in
911-1/0X100-BOXED	1/0 AWG x 100 ft	Cable Only	EPDM	0.08 in
911-1-250	1 AWG x 250 ft	Cable Only	EPDM	0.06 in
911-1-250-RED	1 AWG x 250 ft	Cable Only	EPDM	0.06 in
911-1-500	1 AWG x 500 ft	Cable Only	TPE	0.06 in
911-1/0-1000	1/0 AWG x 1000 ft	Cable Only	EPDM	0.08 in
911-1/0-250	1/0 AWG x 250 ft	Cable Only	EPDM	0.08 in
911-1/0-250-RED	1/0 AWG x 250 ft	Cable Only	EPDM	0.08 in
911-1/0-500	1/0 AWG x 500 ft	Cable Only	EPDM	0.08 in
911-1/0-500-RED	1/0 AWG x 500 ft	Cable Only	EPDM	0.08 in
911-2-1000	2 AWG x 1,000 ft	Cable Only	EPDM	0.06 in
911-2-250	2 AWG x 250 ft	Cable Only	EPDM	0.06 in
911-2-250-RED	2 AWG x 250 ft	Cable Only	EPDM	0.06 in
911-2-500	2 AWG x 500 ft	Cable Only	EPDM	0.06 in
911-2-500-RED	2 AWG x 500 ft	Cable Only	EPDM	0.06 in
911-2/0-1000	2/0 AWG x 1000 ft	Cable Only	EPDM	0.08 in
911-2/0-250	2/0 AWG x 250 ft	Cable Only	EPDM	0.08 in
911-2/0-250-RED	2/0 AWG x 250 ft	Cable Only	EPDM	0.08 in
911-2/0-500	2/0 AWG x 500 ft	Cable Only	EPDM	0.08 in
911-2/0-500-RED	2/0 AWG x 500 ft	Cable Only	EPDM	0.08 in
911-2/0X25	2/0 AWG x 25 ft	Cable Only	EPDM	0.08 in
911-3/0-250	3/0 AWG x 250 ft	Cable Only	EPDM	0.08 in
911-4-250	4 AWG x 250 ft	Cable Only	EPDM	0.06 in
911-4-250-RED	4 AWG x 250 ft	Cable Only	EPDM	0.06 in
911-4-500	4 AWG x 500 ft	Cable Only	EPDM	0.06 in
911-4-500-RED	4 AWG x 500 ft	Cable Only	EPDM	0.06 in
911-4/0-250	4/0 AWG x 250 ft	Cable Only	EPDM	0.08 in
911-6-500	6 AWG x 500 ft	Cable Only	EPDM	0.06 in



Welding Cables with Foot Markings

Features:

- Foot markings are printed on cable jacket for precise cutting without measuring.
- Flexible bare copper wire stranding.
- Tough jacket resists abrasion and chemicals.

Style: Welding Cable with Sequential Footage Marking

Amps: Consult Ampacity Chart

Insulation Thickness: 0.08 in

Voltage: 600 V

Insulation: EPDM

SKU	Cable/Wire Description	Jacket Material	Conductor Material
911-3/0-1000	3/0 AWG x 1000 ft	TPE	Copper
911-1-500-RED	1 AWG x 500 ft	Highly Flexible EPDM	Bare Copper

Table of Contents

Adjustable Wrenches	19	Cylinder Carts & Trucks	64
Anti-Spatter & Chemicals	90	Cylinder Pliers & Wrenches	63
Aprons	28	Diagonal Pliers	17
Arc Gouging Electrodes	88	Dry Rod Ovens	89
Arc Gouging Torches, Parts, & Cables	92	Electrode Holders & Parts	94
Bar Sets	19	End Brushes	6
Battery Clamps	22	Faceshields & Visors	37
Bolt & Chain Cutters	17	Floor & Carpet Cleaners	25
Bonded Abrasive Parts & Accessories	4	Footwear Covers	35
Booster Cables	22	Gloves	43
Boots & Shoes	35	Ground Clamps	95
Brushes, Brooms, & Broom Handles	23	Half Round Files	15
Cable Connectors & Lugs	96	Hammers	15
Cable Covers	98	Hand Pads & Warmers	42
Cable Ties	10	Handsaws	15
Clamps & Spreaders	14	Hex Key Sets	15
Coated Disc Abrasives	5	Knee Pads	35
Coated Flap Disc Abrasives	5	Knife Blades	16
Coats & Jackets	31	Knives	16
Coco Mats	25	Levels	21
Combination Wrenches & Sets	20	Linemans Pliers	17
Crimpers & Strippers	14	Markers	26
Cup Brushes	5	Mig Gun Parts & Accessories	66
Cutting & Burning Guides	63	Mig Guns	65
Cylinder & Caps	63	MIG Welding Wires	70
Cylinder Cart Parts & Accessories	64	Multi-Purpose Scrubbing Wipes	35

Needle Nose Pliers	18	Stands & Ramps	27
Outfits	54	Sweat Bands	41
Pipe Sealant Tapes	11	Tape Measures	21
Pipe Wrenches	20	Tarps	23
Pressure Gauges	62	Tig Torches & Torch Bodies	72
Rainwear	34	Tig Torch Parts & Accessories	75
Resin Bonded Abrasives	3	TIG Welding Wires	83
Rig Wash & Creme Beads	26	Tip Cleaners	62
Rod Holders	88	Tips & Nozzles	55
Rollers	28	Tongue & Groove Pliers	18
Safety Fences	53	Tool Pouches & Holders	18
Safety Glasses, Parts, & Accessories	36	Welding Blankets, Curtains, & Rolls	91
Safety Tapes	53	Welding/Brazing Alloys & Fluxes	86
Sand Strainers	21	Welding Cables & Power Cables	99
Scrapers & Putty Knives	16	Welding Clamps, Spreaders & Holders	99
Scratch Brushes	9	Welding Helmet Parts & Accessories	38
Sleeves & Bibs	32	Welding Hoses	59
Slip Joint Pliers	17	Welding Stick Electrodes	86
Soapstone Holders	27	Wheel Brushes	7
Soapstones	26	Winter Liners & Hoods	42
Socket Sets	19		
Solder Alloys & Fluxes	85		
Sorbents	52		
Spark Lighter & Flints	62		
Specialty Gages	22		
Specialty Pliers	18		

PERMANENT PAINT MARKERS


Our fast-curing, permanent formula adheres to any surface—clean, dirty, or even oily—without compromise. Plus, it's completely free of lead and xylene, making it a safer choice without sacrificing performance. Need precision? The reversible tip lets you switch between broad and fine lines with ease.

Marking temp. range: -50°F - 150°F
(-46°C - 66°C)



Fast-drying, permanent
paint for immediate handling

Dura-Nib™ medium
bullet tip can be flipped
to a chisel point

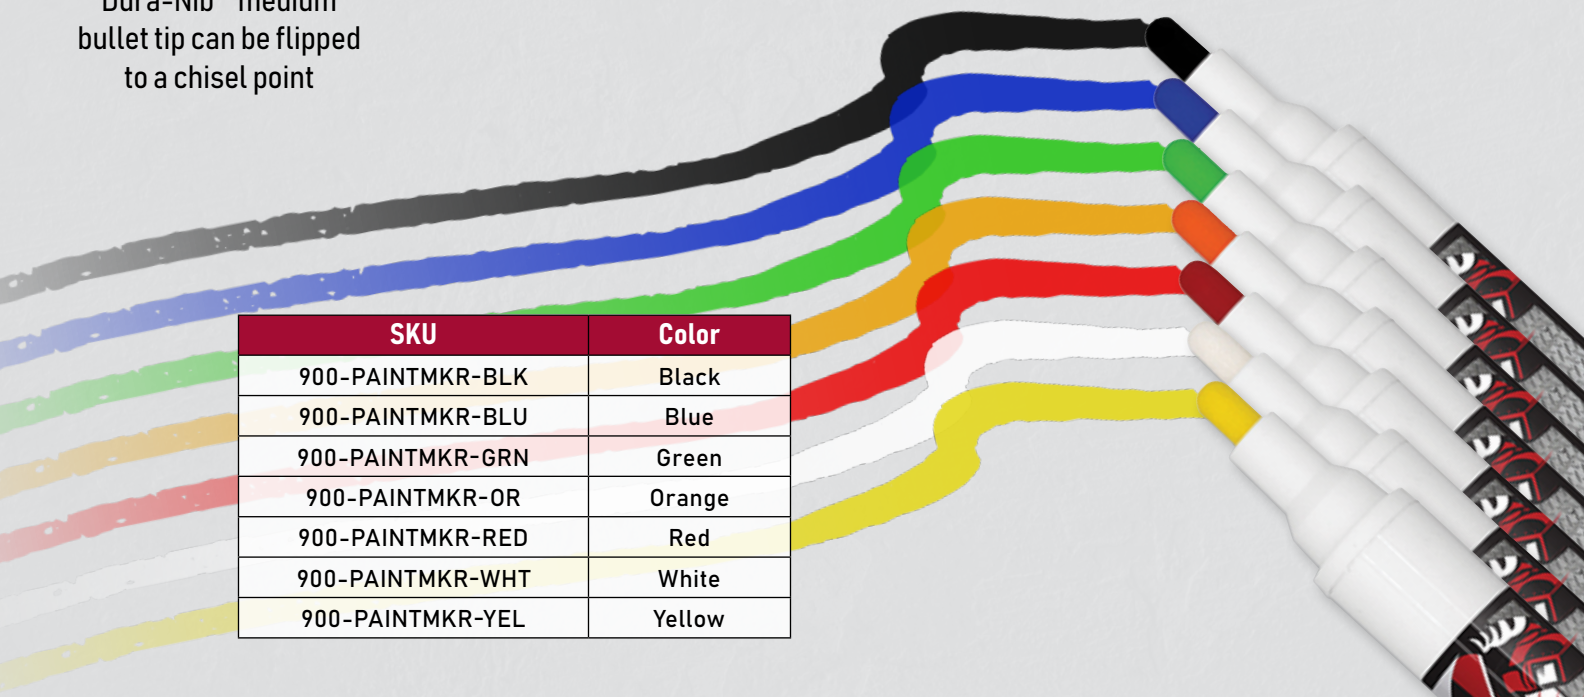

SKU	Color
900-PAINTMKR-BLK	Black
900-PAINTMKR-BLU	Blue
900-PAINTMKR-GRN	Green
900-PAINTMKR-OR	Orange
900-PAINTMKR-RED	Red
900-PAINTMKR-WHT	White
900-PAINTMKR-YEL	Yellow



