



CE
ALL TOOLS
CONFORM TO
EC DIRECTIVE

Catalog C-13

TOP CAT

Air Tools

QUALITY TOOLS & PARTS

FULL TECHNICAL SUPPORT

CUSTOM TOOL DESIGN & PRODUCTION

FAST DELIVERY

MADE IN THE U.S.A.



Primary Industries Served

STEEL/IRON FOUNDRY



POPULAR TOOLS



58C Vertical Cup Grinder



400RA Right Angle Type 27 Grinder



400HGE Die Grinder



520H Horizontal CW Ginder



56H Horizontal Type 1 Grinder



400GHD Horizontal Die Grinder

ALUMINUM FOUNDRY



POPULAR TOOLS



400RA Right Angle Sander



300HGE Die Grinder



Belt Sander



300GH Horizontal Die Grinder

Primary Industries Served

LIGHT FABRICATOR



POPULAR TOOLS



300RAD Right Angle Die Grinder



300RA Right Angle Type 27 Grinder



300GH Horizontal Die Grinder



320RA Right Angle Type 27 Grinder



300HGE Die Grinder

HEAVY FABRICATOR



POPULAR TOOLS



54VK Vertical Cup Grinder



400RA Right Angle Type 27 Grinder



400GH Horizontal Die Grinder



400HGE Die Grinder



WORK SAFETY – Safe Installation & Working Healthy	Page 3-5
---	----------

VERTICAL GRINDER/SANDER INFORMATION	Page 6
-------------------------------------	--------

Vertical Grinders for use with Type 27, Type 27 Cut-Off (Type 42) & 28 Depressed Center Wheels

MODEL NUMBER	PAGE NO.
	520V
	54V
	64V
	727V Coming Soon!
	Page 7
	Page 8

Vertical Grinders for use with Type 11 Cup Wheels

MODEL NUMBER	PAGE NO.
	520V
	58C
	68C
	711C Coming Soon!
	Page 9
	Page 10

Pile Cutters for use with Bonded Type 1 Cut-off (Type 41) or Diamond Wheels

MODEL NUMBER	PAGE NO.
	56PC
	66PC
	Page 11

Vertical Sanders for use with Surface Conditioning Abrasives

MODEL NUMBER	PAGE NO.
	520V
	56S
	Page 12

RIGHT ANGLE GRINDER INFORMATION	Page 14
---------------------------------	---------

Right Angle Grinders for Type 27, Type 27 Cut-Off (Type 42), Type 1 Cut-Off (Type 41) Wheels

MODEL NUMBER	PAGE NO.
	300RA
	400RA
	300RAE
	400RAE
	320RA
	420RA
	520RA
	Page 16
	Page 17
	Page 18
	Page 19

RIGHT ANGLE DIE GRINDER INFORMATION	Page 20
-------------------------------------	---------

Right Angle Grinders for Carbide Burrs, Mounted Stones and Surface Conditioning Abrasives

MODEL NUMBER	PAGE NO.
	300RAD
	410RAD
	300RAED
	410RAED
	330RAD
	340RAD
	Page 22
	Page 23
	Page 24

	320RAD	Page 25
	420RAD	
	300VGE	Page 26

RIGHT ANGLE SANDER INFORMATION	Page 28
--------------------------------	---------

Right Angle Sanders for Surface Conditioning Abrasives

	300RA/307RA	Page 30
	400RA/407RA	
	300RAE/307RAE	Page 31
	400RAE/407RAE	
	330RA6	Page 32
	340RA6	
	320RA6	Page 33
	420RA6	
	3101RA6	Page 34
	4101RA6	
	4520RA/4620RA	Page 35
	520RA	
	300RA(X)M	Page 36
	400RA(X)M/410RA(X)M	
	460RA(X)M	
	300RAE(X)M	Page 37
	400RAE(X)M/410RAE(X)M	

HORIZONTAL GRINDER INFORMATION	Page 38
--------------------------------	---------

Horizontal Grinders for Type 1 Wheels

	400GH/407GH	Page 40
	507H	
	5201H	Page 41
	56H	
	65H	Page 41


Horizontal Grinders for Cone Wheels

	400GH	Page 42
	507H	
	400GH	Page 43
	507H	
	520H	

Horizontal Die Grinders (Collet Output)

	300EH	Page 44
	300GH	

TABLE OF CONTENTS

	400GH 507H	Page 45
Geared Horizontal Polishers/Sanders		
	300GH(X)M/400GH(X)M	Page 46
	500H1M	Page 46
EXTENDED GRINDER INFORMATION Page 48		
Extended Grinders for Burrs, Mounted Stones & 3/8-24 Cone Wheels		
	400EH	Page 50
Extended Grinders for Burrs, Mounted Stones, 3/8-24 Cone Wheels 5/8-11 Cone Wheels & 4 Inch Type 1 Wheels		
	400GEH/407GEH	Page 51
Extended Grinders for 5/8-11 Cone Wheels & 6 Inch Type 1 Wheels		
	520HGEH	Page 52
	65HGEH	Page 53
	65NEH	Page 54
HORIZONTAL DIE GRINDER INFORMATION Page 56		
Horizontal Die Grinders (Collet Output)		
	300GE/307GE	Page 58
	300HGE/307HGE	Page 58
	400GE	Page 59
	400HGE	Page 59
	400GT	Page 59
Horizontal Die Grinders for Type 1, Type 1 Cut-Off & Type 41 Wheels		
	400GT	Page 60
	407GT	Page 60
Horizontal Die Grinders for 3/8-24 Cone Wheels		
	400GTCW	Page 61
	407GTCW	Page 61
Geared Horizontal Die Grinders (Collet Output)		
	300HGE(X)M	Page 62
	400HGE(X)M	Page 62
Geared Horizontal Die Grinders for Surface Conditioning Abrasives		
	300GT(X)M	Page 63
	400GT(X)M	Page 63
AIR DRILLS INFORMATION Page 64		
	300D(X)M	Page 66
	400D(X)M	Page 66
	400D(X)MP	Page 67
	500D2M	
	300DRA(X)M 300DRAE(X)M	Page 68
	400DRA(X)M 400DRAE(X)M	
	400FD(X)M	Page 69
	500FD1M	
BELT SANDER		
	300BL/K	Page 70
BENCH GRINDER		
	66BVG	Page 71
ABRASIVE CUTTING TOOLS		
	65VBW	Page 72
	662VBW	
SCALERS, NEEDLE SCALERS & CHIPPING HAMMERS INFORMATION Page 74		
Scalers		
	TC-1	Page 75
	TC-182	
Needle Scalers		
	TC-1	Page 76
	TC-182	
Chipping Hammers		
	80	Page 77
	TC-183	
MOTORS INFORMATION Page 78		
	300 Series	Page 79
	400 Series	Page 80
	500 Series	Page 81
	520 Series	
	664 Series	Page 82
SANDING PADS Page 84		
BUSHINGS, COLLETS & ADAPTERS Page 85		
GUARDS Page 86		
MAINTENANCE TOOLS Page 87		
REPAIR KITS Page 88-89		
WARRANTY Page 90		
INDEX Page 91		



Work Safety

When care is taken to insure that the right tool is operated properly, and the safety and maintenance procedures are followed, accidents may be avoided.

 Read and understand tool manual before work starts to reduce risk of injury to operator, visitors, and tool. Many more guidelines are provided in the tool manual.

Users are responsible for following all established safety codes and regulations such as:

- General Industry Safety & Health Regulations 29 CFR, Part 1910 and, where applicable, Construction Industry Safety & Health Regulations 29 CFR, Part 1929 available from the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402
- Safety Requirements for the Use, Care and Protection of Abrasive Wheels – ANSI B7.1, available from American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018
- Applicable State and Local Regulations.

Personal Protection

 Do not use while under the influence of drugs, alcohol or medication. Attention is required to avoid accidents.


Beware of loose hair and clothing so as not to become tangled or trapped during operation.

 Eye protection must be worn at all times to prevent particulates from causing eye injury. Eye protection shall conform to ANSI Z87.1.

 Ear protection is to be worn when exposure to sound exceeds the limits of applicable Federal, State or local statutes, ordinances or regulations.

 Respiratory protection to be used when exposed to contaminants that exceed the applicable threshold limit values required by law.

The following suggestions will help reduce or moderate the effects of repetitive work motion and/or extended vibration exposure:

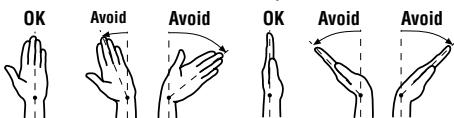

- 1) Do NOT over-grip the machine/tool. Use only the force required to maintain control.
- 2) Keep hands and body dry and warm. (Blood flow is important – exercise hands and arms as often as necessary).
- 3) Keep wrists as straight as possible. (AVOID hand positions that require the wrist to be flexed, hyper extended or turned side-to-side).
- 4) AVOID anything that may inhibit blood circulation such as smoking tobacco or

prolonged exposure to cold temperatures.

- 5) Do NOT support body-weight on the tool during operation.
- 6) Maintain a stress-free posture for the entire body.

Prolonged exposure to vibrations created by vibrating sources may cause health hazards. There are gloves, handle wraps and other forms of protective measures available to help reduce the hazard. The fit and condition of any vibration abatement measure must be monitored.

Workplace Safety



Pressurized air supply lines and flexible hoses can cause serious injury. Do not use damaged, frayed or deteriorated air hoses and fittings.

The workplace should be clear of hazards and well lit. Dark, cluttered areas make injury more likely

Keep bystanders away while operating a tool. Be aware of the direction of sparks and other grinding and cutting debris.

Make sure that the workpiece is well secured before working. A moving workpiece can cause tools to slip and lead to injury.

Grinder Safety



Machines, attachments and accessories must be used only for the purpose for which they were designed. Do not modify any part of any tool or accessory. Do not use any unapproved accessory.

All tools are designed for use with a pressure of 90 PSI (6.2 Bar) maximum. Excess pressure will cause speed to increase leading to a potential unsafe operating speed.



Inspect the wheel guard for any signs of wear and that it is properly mounted to the tool. Any guard showing signs of wear such as bends, chips, nicks, or cracks shall be replaced.

Verify that the wheel flanges, wheel adapters and spindle threads are correct for the wheel type to be mounted. Only use recommended flanges and wheel adapters. Verify that the guard is correct for the wheel type to be mounted.

Make sure that the tool is in good working order. For example, make sure handles are tight, the spindle bearings are solid—the spindle should not move in and out of the tool when pulled—the flanges are clean and free of nicks and the motor spindle spins freely.

There are a few things that must be checked before using a wheel:

- The rated speed of the grinding wheel and all accessories must equal or exceed the rated speed of the machine. Spinning items too fast may cause them to fail and result in injury.



- Inspect wheel for cracks or chips—if found, do not use. Cracks and chips weaken the wheel making a failure more probable

- Do not fit a wheel that has been soaked in or exposed to any liquids. Liquids may loosen the bonds of the wheel and lead to failure.

- Wheels without built in threads should fit on spindle but not loose. Loose wheels may be greatly out of balance and cause undue stress on the wheel leading to failure.
- Wheels should be uniform and balanced. Out of balance wheels increase the stress in the wheel and may lead to injury.
- Follow the proper handling and storage of abrasive wheels and inserted tooling as described in ANSI B7.1.



The spindle speed of the tool must be checked. This measured speed shall always be less than the rated speed of the tool. If the tool's speed measures higher than its rated speed it shall be removed from use and corrected before being returned to use.

- Verify that the air line pressure is 90 PSI (6.2 Bar) maximum. Excess pressure will cause speed to increase leading to a potential unsafe operating speed.
- Several speed readings should be taken with the tool being turned on and off between readings. More tests make sure that the tool is reliably reaching the same speed.
- Tachometers must be checked and calibrated on a regular basis according to the manufacturer's recommendations. Precise numbers can only be arrived at by accurate equipment.
- This form of inspection should be made with the grinding wheel or other tooling removed.
- Measure the speed of grinders every 20 hours of actual use or once per week, whichever comes first.
- Measure the speed of grinders after maintenance or repair, whenever a grinder is issued from the tool crib and at each wheel change.
- Test a wheel by running the tool under a bench and away from bystanders.
 - Run for a minimum of one minute.
 - Turn the tool on and off several times.
 - This test should be performed any time a wheel may have been pinched, dropped, when the tool is issued or when first using the tool for the day.



Seguridad laboral

Es posible evitar accidentes cuando se tiene cuidado de usar la herramienta correcta de forma adecuada, y se siguen los procedimientos de seguridad y mantenimiento.



Lea y comprenda el manual de la herramienta antes de comenzar a trabajar para reducir el riesgo de lesiones al operario, a los visitantes y a la herramienta. En el manual de la herramienta se proporciona más información.

Los usuarios son responsables de seguir todos los códigos y normativas de seguridad establecidos, como son:

- La normativa de seguridad y salud en la industria general (29 CFR, Parte 1910) y, donde corresponda, la normativa de seguridad y salud en la industria de la construcción (29 CFR, Parte 1929) disponibles en Superintendent of Documents, Government Printing Office, Washington, D.C. 20402
- Los requisitos de seguridad para el Uso, el cuidado y la protección de ruedas abrasivas (ANSI B7.1), disponible en American National Standards Institute, Inc., 1430 Broadway, Nueva York, NY 10018
- Las normativas estatales y locales correspondientes.

Protección personal



No utilizar mientras si ha consumido drogas, alcohol o medicamentos. Se requiere atención para evitar accidentes.

Tenga cuidado con el cabello y la ropa suelta para que no se llegue a enredar o quedar atrapada durante la operación.



Debe usar protectores para los ojos en todo momento para evitar que las partículas causen daños a los ojos. Los protectores de ojos deben ajustarse a la norma ANSI Z87.1.



Debe usar protectores para los oídos cuando la exposición a los ruidos excede los límites de los estatutos, ordenanzas o normativas federales, estatales o locales correspondientes.



Debe usar protección respiratoria cuando se expone a contaminantes que excedan los valores límite que exigen las leyes correspondientes.

Las siguientes sugerencias le ayudarán a reducir o moderar los efectos del movimiento repetitivo en el trabajo y/o la exposición prolongada a la vibración:



1) NO agarre la máquina o herramienta con demasiada fuerza. Aplique únicamente la fuerza necesaria para mantener el control.

2) Mantenga las manos y el cuerpo secos y cálidos. (El flujo sanguíneo es importante; ejercite las manos y los brazos tan a menudo como sea necesario).

3) Mantenga las muñecas tan rectas como sea posible. (EVITE las posiciones de mano que requieren que la muñeca esté doblada, hiper extendida o girada de lado a lado.)

4) EVITE cualquier cosa que pueda inhibir el flujo sanguíneo como son fumar tabaco o la

exposición prolongada a temperaturas frías.

5) NO apoye el peso corporal en la herramienta durante la operación.

6) Mantenga una postura relajada para el cuerpo entero.

La exposición prolongada a las vibraciones creadas por fuentes vibratorias puede causar un riesgo para la salud. Hay guantes, cubiertas de asidero y otras formas de medidas protectoras disponibles para ayudar a reducir el riesgo. Debe vigilar el ajuste y la condición de cualquier medida para la disminución de vibración.

Seguridad en el lugar de trabajo



Las líneas de suministro neumático presurizadas y las mangueras flexibles pueden causar heridas graves. No utilice mangueras y accesorios neumáticos dañados, deshilachados o deteriorados.

El lugar de trabajo debe estar libre de riesgos y bien iluminado. Las áreas oscuras y atestadas aumentan las probabilidades de heridas.

Aleje a los espectadores mientras opera una herramienta. Preste atención a la dirección de las chispas y otros residuos que se producen al moler y cortar.

Asegúrese de que la pieza de trabajo esté bien asegurada antes de trabajar. Una pieza de trabajo móvil puede hacer que la herramienta resbale y conducir a heridas.

Seguridad en el Pulido



Las máquinas, los aditamentos y los accesorios deben ser utilizados únicamente para el propósito para los que fueron diseñados. No modifique ninguna parte de alguna herramienta o accesorio. No utilice

un accesorio que no ha sido previamente aprobado.

Todas las herramientas están diseñadas para usarse a una presión máxima de 90 psi (6.2 Bar). Un exceso en la presión hará que aumente la velocidad, lo cual llevará a una velocidad de operación potencialmente peligrosa.



Inspeccione el guarda de la rueda en cuanto a señales de desgaste y que esté correctamente instalada en la herramienta. La guarda que muestre señas de desgaste como dobleces, despostillamientos, mellas o grietas debe ser reemplazada.

Verifique que las bridas de rueda, los adaptadores de rueda y la rosca del eje sean los correctos para el tipo de rueda que se instalará. Utilice únicamente las bridas y los adaptadores de rueda recomendados. Verifique que la guarda sea la correcta para el tipo de rueda que se instalará.

Compruebe que la herramienta esté funcionando. Por ejemplo, compruebe que los asideros están apretados y los cojinetes de eje están sólidos; que el eje no entre y salga de la herramienta cuando se jala; que las bridas estén limpias y sin mellas y que el eje del motor gire libremente.

Hay algunas cosas que debe revisar antes de utilizar una rueda:

• La velocidad nominal de la rueda de amolar y todos los accesorios debe ser igual o mayor a la velocidad nominal de la máquina. Si los artículos giran demasiado rápido pueden fallar

y resultar en lesiones.

• Inspecione la rueda en cuanto a grietas o despostillamientos; si encuentra algo, no la utilice. Las grietas y despostillamientos debilitan la rueda haciendo que sea más probable que falle.

• No coloque una rueda que ha sido sumergida o expuesta a algún líquido. Los líquidos pueden aflojar el vínculo de la rueda y conducir a fallas.

• Las ruedas que no tienen rosca deben quedar en el eje pero no quedar sueltas. Las ruedas flojas pueden estar muy desequilibradas y causar una tensión excesiva en la rueda, haciendo que falle.

• Las ruedas deben ser uniformes y equilibradas. Las ruedas desequilibradas aumentan la tensión en la rueda y pueden llevar a lesiones.

• Siga el manejo y almacenamiento adecuados de las ruedas abrasivas y de las herramientas instaladas, como se describe en la norma ANSI B7.1.



La velocidad del eje de la herramienta debe ser verificada. La velocidad medida siempre debe ser menor que la velocidad nominal de la herramienta. Si la velocidad de la herramienta resulta más alta que la velocidad nominal, debe eliminar del uso y corregir el problema antes de que se utilice de nuevo.

• Verifique que la presión máxima de la línea neumática sea de 90 psi (6.2 Bar). Un exceso en la presión hará que aumente la velocidad, lo cual llevará a una velocidad de operación potencialmente peligrosa.

• Debe tomar varias lecturas de la velocidad con la herramienta, encendiendo y apagando la herramienta entre lecturas. Las pruebas adicionales aseguran que la herramienta alcance la misma velocidad de forma confiable.

• Los tacómetros deben ser verificados y calibrados con regularidad según las recomendaciones del fabricante. Únicamente se pueden lograr números precisos con un equipo exacto.

• Realice esta forma de inspección quitando primero la rueda de amolar u otros accesorios.

• Mida la velocidad de los moledores cada 20 horas de uso real o una vez a la semana, lo que sea primero.

• Mida la velocidad de los moledores después de un mantenimiento o reparación, siempre que saque un moledor de la bodega de herramienta o cuando se instale un moledor nuevo.

• Pruebe una rueda haciendo funcionar la herramienta debajo de un banco y lejos de los espectadores.

• Déjela encendida al menos durante un minuto.

• Encienda y apague la herramienta varias veces.

• Realice esta prueba siempre que comprima o deje caer una rueda, cuando utilice la herramienta por primera vez o cuando utilice la herramienta por primera vez en el día.

Conseils de sécurité

Quand on prend soin de s'assurer que le bon outil est utilisé correctement, et que les procédures de sécurité et d'entretien sont respectées, les accidents peuvent être évités.

 Lire et comprendre le manuel de l'outil avant le début des travaux pour réduire le risque de blessures pour l'opérateur, les visiteurs, et l'endommagement de l'outil. Beaucoup plus de conseils sont fournis dans le manuel de l'outil.

Les utilisateurs sont tenus de suivre tous les codes de sécurité et les règlements établis tels que:

- General Industry Safety & Health Regulations 29 CFR, Partie 1910 et, le cas échéant, Construction Industry Safety & Health Regulations 29 CFR, Partie 1929, disponible auprès du Superintendent of Documents, Government Printing Office, Washington, D.C. 20402
- Safety Requirements for the Use, Care and Protection of Abrasive Wheels – ANSI B7.1, disponible auprès de American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018
- Règlements locaux et d'État applicables.

Protection individuelle



Ne pas utiliser sous l'influence de drogues, d'alcool ou de médicaments. L'attention est nécessaire pour éviter les accidents.

 Méfiez-vous des cheveux et des vêtements trop lâches afin de ne pas vous emmeler ou être piégé pendant le fonctionnement.

 Une protection des yeux doit être portée en tout temps pour empêcher les particules de causer des blessures aux yeux. La protection des yeux doivent être conformes à la norme ANSI Z87.1.

 Une protection auditive doit être portée lors de l'exposition au bruit dépassant les limites des statuts, ordonnances ou règlements applicables au niveau fédéral, provincial ou local.

 Une protection respiratoire doit être utilisée en cas d'exposition à des contaminants qui dépassent les valeurs limites d'exposition applicables prévues par la loi.

Les suggestions suivantes vous permettront de réduire ou d'atténuer les effets du mouvement de tâches répétitives et / ou l'exposition aux vibrations prolongées:



- 1) NE PAS tenir trop fermement la machine ou l'outil. Utilisez juste la force nécessaire pour maintenir le contrôle.
- 2) Garder les mains et le corps sec et chaud. (La circulation du sang est importante - relaxez les mains et les bras aussi souvent que nécessaire).
- 3) Gardez les poignets aussi droits que possible. (ÉVITER les positions de main qui nécessitent le pliement et une tension excessive du poignet ou le fait de le tourner d'un côté ou de l'autre).
- 4) ÉVITER tout ce qui peut entraver la circulation du sang tel que le tabagisme ou l'exposition prolongée à des températures

froides.

- 5) NE PAS mettre le poids de votre corps sur l'outil pendant l'opération.
- 6) Maintenir une posture sans stress pour le corps tout entier.

Une exposition prolongée aux vibrations créées par des sources de vibration peut provoquer des dangers pour la santé. Il y a des gants, des enveloppements de poignées et d'autres formes de mesures de protection disponibles pour aider à réduire les risques. L'ajustement et la condition de toute mesure de réduction de vibration doivent être surveillés.

Sécurité du lieu de travail



Les conduites d'air sous pression et les tuyaux flexibles peuvent causer des blessures graves. Ne pas utiliser de tuyaux d'air et de raccords endommagés, effilochés ou détériorés.

Le lieu de travail doit être débarrassé de tout risque et bien éclairé. Les zones sombres et encombrées représentent une possibilité plus grande de blessures.

Éloignez les passants lorsqu'on utilise un outil. Soyez conscient de la direction des étincelles et autres débris de meulage et de coupe.

Assurez-vous que la pièce est bien fixée avant de travailler. Une pièce en mouvement peut causer le glissement des outils et provoquer des blessures.

Sécurité concernant les meules



Les machines, équipements et accessoires doivent être utilisés uniquement aux fins pour lesquelles ils ont été conçus. Ne modifier aucune partie de n'importe quel outil ou accessoire. N'utiliser aucun accessoire non approuvé.

Tous les outils sont conçus pour une utilisation sous une pression de 90 psi (6,2 bar) au maximum. Une pression excessive provoque une augmentation de la vitesse, ce qui entraîne une vitesse de fonctionnement potentiellement dangereuse.



Inspecter le carter de protection de la meule pour détecter tout signe d'usure et pour voir s'il est correctement monté sur l'outil. Tout carter de protection montrant des signes d'usure tels que coudes, écaillures, entailles ou fissures doit être remplacé.

Vérifiez que les brides des meules, adaptateurs de meules et filetages de l'axe du moteur sont corrects pour le type de meule qui doit être montée. N'utilisez que les brides et adaptateurs de meule recommandés. Vérifiez que le dispositif de protection est correct pour le type de meule à monter.

Assurez-vous que l'outil est en bon état de fonctionnement. Par exemple, assurez-vous que les poignées sont bien serrées, que les roulements de l'arbre du moteur sont solides: l'axe ne doit pas se déplacer vers l'intérieur ou l'extérieur de l'outil lorsqu'il est tiré, les brides doivent être propres et exempts d'entailles et l'axe du moteur doit tourner librement.

Il y a certaines choses qui doivent être vérifiées avant d'utiliser une meule:

- La vitesse nominale de la meule et tous les accessoires doivent égaler ou dépasser la vitesse nominale de la machine. Faire tourner des pièces trop rapidement peut les faire rater et entraîner des blessures.



- Inspecter la meule pour voir si elle a des fissures ou des copeaux, si vous en trouvez, ne l'utilisez pas. Les fissures et les écaillures affaiblissent la meule, ce qui rend plus probable le ratage de la pièce

- Ne montez pas une meule qui a été trempée dans un liquide ou exposé à un liquide. Les liquides peuvent relâcher les liens de la meule et conduire à l'échec.

- Les meules sans filetage incorporé doivent tenir sur l'axe mais sans être lâche. Les meules libres peuvent être fortement déséquilibrées et causer un stress excessif sur la meule, ce qui conduit à l'échec.

- Les meules doivent être uniformes et équilibrées. Une meule déséquilibrée augmente le stress dans la meule et peut entraîner des blessures.

- Suivre la manutention et l'entreposage des meules abrasives et des outils qui y sont attachés tel que cela est décrit dans la norme ANSI B7.1.



La vitesse de l'axe de l'outil doit être vérifiée. Cette vitesse mesurée est toujours inférieure à la vitesse nominale de l'outil. Si la vitesse de l'outil est supérieure à sa vitesse nominale il doit être retiré de l'utilisation et corrigé avant d'être réutilisé.

- Assurez-vous que la pression de la conduite d'air est de 90 PSI (6,2 bar) maximum. Une pression excessive provoque une augmentation de la vitesse, ce qui conduit à une vitesse de fonctionnement potentiellement dangereux.

- Plusieurs lectures de vitesse doivent être prises alors que l'outil est allumé et éteint entre les lectures. D'autres tests permettent de s'assurer que l'outil est fiable pour atteindre la même vitesse.

- Les compte-tours doivent être vérifiés et étalonnés régulièrement, conformément aux recommandations du fabricant. Les chiffres précis ne peuvent être obtenu qu'avec des équipements précis.

- Ce formulaire d'inspection doit être effectué avec la meule ou autre outillage retiré.






- Mesurer la vitesse des meules toutes les 20 heures d'utilisation réelle ou une fois par semaine, selon ce qui se produit en premier.

- Mesurer la vitesse des meules après un entretien ou une réparation, chaque fois qu'une meule sort de l'armoire à outils et à chaque changement de roue.



- Tester une meule en exécutant l'outil sous un établi et à l'abri des passants.
- faire tourner la meule pendant un minimum d'une minute.
- Mettez en marche et arrêtez la meule plusieurs fois.
- Ce test doit être effectué chaque fois qu'une meule a été pincée, est tombée, lorsque l'outil est délivré ou lors de la première utilisation de l'outil pour la journée.

Vertical Tools

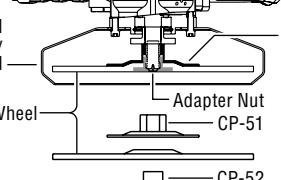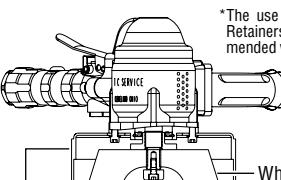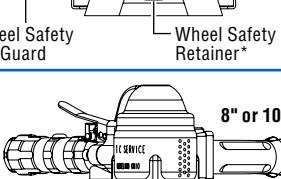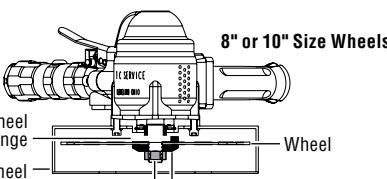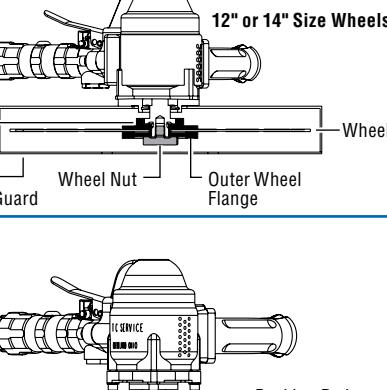Page Number	Application	Abrasive Size	Model Series	Power Output	Mounting of Abrasives
7	Type 27, Type 27 Cut-Off (Type 42) & 28 Depressed Center Wheels	7 Inch (180 mm)	520V	2 H.P. (1.5 kW)	 Type 27 Wheel w/o Hub Wheel Safety Guard Adapter Wheel Adapter Nut CP-51 CP-52
		7 Inch (180 mm)	54V	3 H.P. (2.3 kW)	
		9 Inch (230 mm)			
8	Type 27 Wheel with Built-in Adapter	7 Inch (180 mm)	64V	4 H.P. (3.0 kW)	 Type 27 Wheel with Built-in Adapter
		9 Inch (230 mm)	727V	4.3 H.P. (3.2 kW)	
		9 Inch (230 mm)			
9	Type 11 Cup Wheels	4 Inch (100 mm)	520V	2 H.P. (1.5 kW)	 *The use of Wheel Safety Retainers is highly recommended with cup wheels.
		4 Inch (100 mm)	58C	3 H.P. (2.3 kW)	
		6 Inch (150 mm)			
10	Type 11 Wheel	6 Inch (150 mm)	68C	4 H.P. (3.0 kW)	 Wheel Safety Guard Wheel Safety Retainer*
		6 Inch (150 mm)	711C	4.3 H.P. (3.2 kW)	
		Cup Wheel Maximum Height is 2.0 inches (50mm).			
11	Type 1 Cut-Off (Type 41) Bonded or Diamond Wheels	8 Inch (200 mm)	56PC	3 H.P. (2.3 kW)	 8" or 10" Size Wheels
		10 Inch (250 mm)			
		12 Inch (300 mm)	66PC	4 H.P. (3.0 kW)	
		14 Inch (350 mm)			
12	Surface Conditioning or Sanding Abrasives	7 Inch (180 mm)	520V	2 H.P. (1.5 kW)	 12" or 14" Size Wheels
		56S	3 H.P. (2.3 kW)		
		9 Inch (230 mm)	56S	3 H.P. (2.3 kW)	
		Flap Wheels, Sand Paper or Scotch® Discs			

HANDLES

Several different handle styles are offered on our vertical tools. Pictured below are each in detail.



(L) Regular Lever



(K) Safety Lever



(B) Thumb Switch

SPEED/GUARD SIZE SELECTION

The rated speed and guard size are closely linked to promote safety and maximize efficiency of the grinding operation. Each model offers various options that are specific to the size/type of the abrasive.

MOUNTING OF ABRASIVES

Each wheel type mounts onto the tool in a specific way. Please consult the diagrams above for details on how your particular wheel mounts onto the tool. More details on the mounting of wheels can be found in ANSI B7.1 and ANSI B186.1. Mounting wheels in ways other than those shown are non-compliant and may lead to injury.

Depressed Center
Type 27 Wheel

 Depressed Center Type 27
Cut-Off (Type 42) Wheel


7 Inch • 9 Inch Diameter Wheels
(180 mm) (230 mm)

Vertical Grinders for use with Type 27, Type 27 Cut-Off (Type 42) & 28 Depressed Center Wheels



520V Series


520VK;8000;727


54V Series

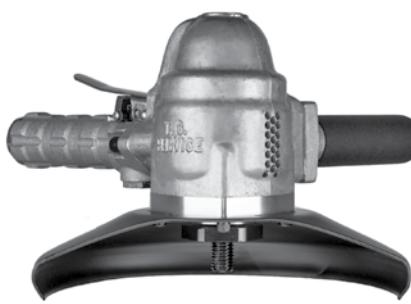
54VK;6000;927

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	
7 Inch (180 mm)	8000 RPM	Standard Lever	520VL;8000;727	7 Inch (180 mm)	8000 RPM	Standard Lever	54VL;8000;727	
		Safety Lever	520VK;8000;727			Safety Lever	54VK;8000;727	
				9 Inch (230 mm)	6000 RPM	Standard Lever	54VL;6000;927	
						Safety Lever	54VK;6000;927	

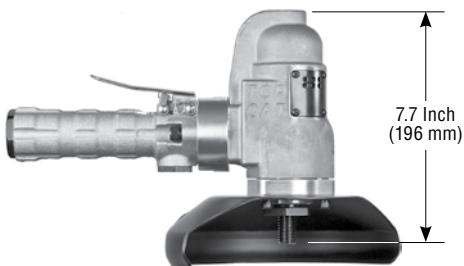
 2.0 H.P.
(1.5 kW)

 20 cfm (9.4 L/s) Free Speed
40 cfm (18.9 L/s) Max

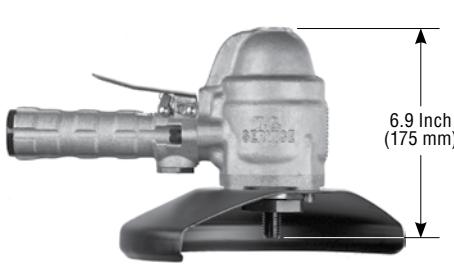 7.4 Lbs.
(3.3 Kg)

 1/2" NPT Inlet
1/2" (13 mm) Hose Size

 3.0 H.P.
(2.3 kW)

 25 cfm (18.8 L/s) Free Speed
60 cfm (28.3 L/s) Max

 9.8 Lbs.
(4.4 Kg)

 1/2" NPT Inlet
1/2" (13 mm) Hose Size


Piped Away Exhaust Available to Reduce Sound Emissions.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS

Operating Speed



The tools above can be rated at speeds slower than 8000 RPM when used with a 7 Inch (180 mm) wheel.

Handles



WHEEL MOUNTING



Type 27 or Type 27 Cut-Off (Type 42)

The depressed center wheel adapters are not supplied as standard equipment with the tools. If you are using a wheel that requires the adapters, they must be purchased separately.


Depressed Center
Type 27 WheelDepressed Center Type 27
Cut-Off (Type 42) Wheel7 Inch • 9 Inch Diameter Wheels
(180 mm) (230 mm)

Vertical Grinders for use with Type 27, Type 27 Cut-Off (Type 42) & 28 Depressed Center Wheels

64V Series




64VK;6000;927

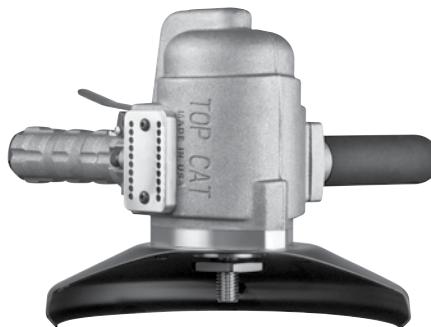727V Series Coming Soon!

727VK;6000;927

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER
7 Inch (180 mm)	8000 RPM	Standard Lever	64VL;8000;727	9 Inch (230 mm)	6000 RPM	Standard Lever	727VL;6000;927
		Safety Lever	64VK;8000;727			Safety Lever	727VK;6000;927
9 Inch (230 mm)	6000 RPM	Standard Lever	64VL;6000;927			Standard Lever	727VL;6000;927
		Safety Lever	64VK;6000;927			Safety Lever	727VK;6000;927

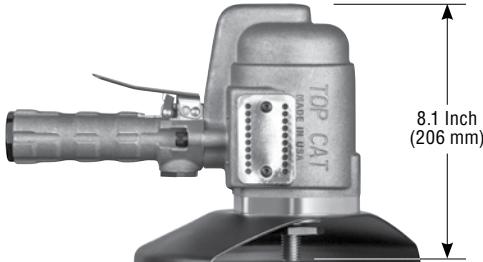4.0 H.P.
(3.0 kW)25 cfm (18.8 L/s) Free Speed
75 cfm (35.4 L/s) Max11.3 Lbs.
(5.1 Kg)1/2" NPT Inlet
1/2" (13 mm) Hose Size4.3 H.P.
(3.2 kW)25 cfm (18.8 L/s) Free Speed
85 cfm (40.1 L/s) Max12.8 Lbs.
(5.8 Kg)1/2" NPT Inlet
1/2" (13 mm) Hose Size

Piped Away Exhaust Available to Reduce Sound Emissions.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS

Operating Speed




The tools above can be rated at speeds slower than 8000 RPM when used with a 7 Inch (180 mm) wheel.

Handles



WHEEL MOUNTING

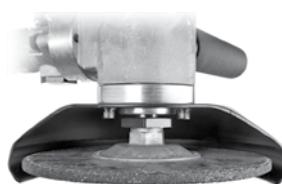

Type 27 or Type 27 Cut-Off (Type 42)

The depressed center wheel adapters are not supplied as standard equipment with the tools. If you are using a wheel that requires the adapters, they must be purchased separately.



4 Inch • 6 Inch Diameter Wheels
(100 mm) (150 mm)


Vertical Grinders for use with Type 11 Cup Wheels

520V Series




520VK;8000;411

58C Series

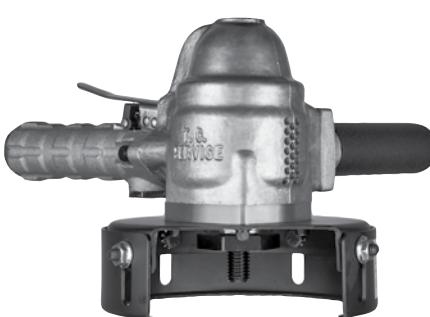

58CK;6000;611

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER
4 Inch (100 mm)	8000 RPM	Standard Lever	520VL;8000;411	4 Inch (100 mm)	8000 RPM	Standard Lever	58CL;8000;411
		Safety Lever	520VK;8000;411			Safety Lever	58CK;8000;411
				6 Inch (150 mm)	6000 RPM	Standard Lever	58CL;6000;611
						Safety Lever	58CK;6000;611

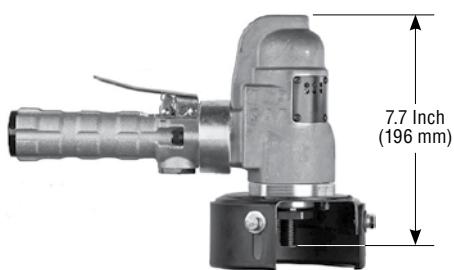

2.0 H.P.
(1.5 kW)




7.5 Lbs.
(3.4 Kg)



20 cfm (9.4 L/s) Free Speed
40 cfm (18.9 L/s) Max



1/2" NPT Inlet
1/2" (13 mm) Hose Size

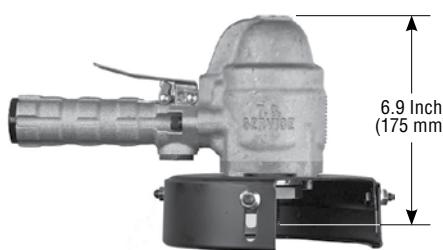

3.0 H.P.
(2.3 kW)



25 cfm (18.8 L/s) Free Speed
60 cfm (28.3 L/s) Max



10.3 Lbs.
(4.7 Kg)



1/2" NPT Inlet
1/2" (13 mm) Hose Size



Piped Away Exhaust Available to Reduce Sound Emissions.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS



Versions are Available on Model 58C for use with 5 Inch (125 mm) Wheels.



WHEEL MOUNTING



Type 11 Wheel



Type 11 Wheel

4 Inch • 6 Inch Diameter Wheels
(100 mm) (150 mm)

Vertical Grinders for use with Type 11 Cup Wheels


68C Series

**68CK;6000;611**

711C Series Coming Soon!

**711CK;6000;611**

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER
6 Inch (150 mm)	6000 RPM	Standard Lever	68CL;6000;611	6 Inch (150 mm)	6000 RPM	Standard Lever	711CL;6000;611
		Safety Lever	68CK;6000;611			Safety Lever	711CK;6000;611

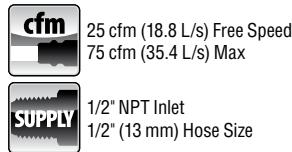4.0 H.P.
(3.0 kW)11.8 Lbs.
(5.3 Kg)25 cfm (18.8 L/s) Free Speed
75 cfm (35.4 L/s) Max1/2" NPT Inlet
1/2" (13 mm) Hose Size4.3 H.P.
(3.2 kW)13.3 Lbs.
(6.0 Kg)25 cfm (18.8 L/s) Free Speed
85 cfm (40.1 L/s) Max1/2" NPT Inlet
1/2" (13 mm) Hose Size

Piped Away Exhaust Available to Reduce Sound Emissions.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS



Wheel Size

Versions are Available on
Model 68C for use with
5 Inch (125 mm) Wheels.

Handles



WHEEL MOUNTING



Type 11 Wheel

Pile Cutters for use with Bonded Type 1 Cut-off (Type 41) or Diamond Wheels

56PC Series



56PCK;6000;841

66PC Series



66PCK;4000;1441

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER
8 Inch X 5/8 ID (200 mm)	6000 RPM	Standard Lever	56PCL;6000;841	10 Inch X 5/8 ID (250 mm)	6000 RPM	Standard Lever	66PCL;6000;1041
		Safety Lever	56PCK;6000;841			Safety Lever	66PCK;6000;1041



3.0 H.P.
(2.3 kW)



25 cfm (18.8 L/s) Free Speed
60 cfm (28.3 L/s) Max



11.3 Lbs.
(5.1 Kg)



1/2" NPT Inlet
1/2" (13 mm) Hose Size

10 Inch X 5/8 ID (250 mm)	6000 RPM	Standard Lever	66PCL;6000;1041
		Safety Lever	66PCK;6000;1041
12 Inch X 1.0 ID (300 mm)	5000 RPM	Standard Lever	66PCL;5000;1241
		Safety Lever	66PCK;5000;1241
14 Inch X 1.0 ID (350 mm)	4000 RPM	Standard Lever	66PCL;4000;1441
		Safety Lever	66PCK;4000;1441



4.0 H.P.
(3.0 kW)



25 cfm (18.8 L/s) Free Speed
75 cfm (35.4 L/s) Max



15.8 Lbs.
(7.2 Kg)



1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches
(sizes based on options)

ALTERNATE OPTIONS



WHEEL MOUNTING





7 Inch • 9 Inch Sanding Abrasives
(180 mm) (230 mm)

Vertical Sanders for use with Surface Conditioning Abrasives

520V Series




520VK;8000;7SP

56S Series



56SK;6000;7SP

Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	Wheel Size	Operating Speed	Lever Style	MODEL NUMBER	
7 Inch (180 mm)	6000 RPM	Standard Lever	520VL;6000;7SP	7 Inch (180 mm)	6000 RPM	Standard Lever	56SL;6000;7SP	
		Safety Lever	520VK;6000;7SP			Safety Lever	56SK;6000;7SP	
	8000 RPM	Standard Lever	520VL;8000;7SP		8000 RPM	Standard Lever	56SL;8000;7SP	
		Safety Lever	520VK;8000;7SP			Safety Lever	56SK;8000;7SP	
				9 Inch (230 mm)	6000 RPM	Standard Lever	56SL;6000;9SP	
						Safety Lever	56SK;6000;9SP	

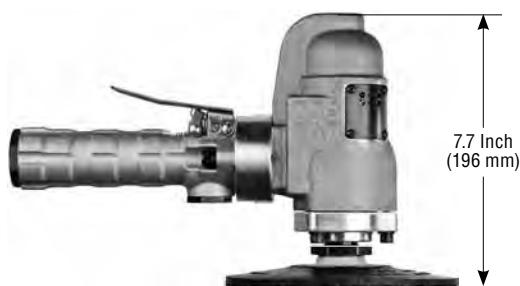

2.0 H.P.
(1.5 kW)



20 cfm (9.4 L/s)
40 cfm (18.9 L/s) Max



6.8 Lbs.
(3.1 Kg)



1/2" NPT Inlet
1/2" (13 mm) Hose Size



3.0 H.P.
(2.3 kW)



25 cfm (18.8 L/s)
60 cfm (28.3 L/s) Max



8.8 Lbs.
(4.0 Kg)



1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

ALTERNATE OPTIONS

Handles



ABRASIVE MOUNTING



Sanding Disc



Right Angle Grinding & Cutting Tools


Application	Page Number	Tool Configuration	Abrasive Size	Model Series	Power Output	
Type 27 Depressed Center Wheels	16		• Large Bearing & Gears for High Duty Cycle & Longevity	4 Inch (100 mm) 4 1/2 Inch (115 mm) 5 Inch (125 mm)	300RA 400RA 300RA 400RA	0.7 H.P. (600 W) 1.2 H.P. (900 W) 0.7 H.P. (600 W) 1.2 H.P. (900 W)
Type 1 Cut-off (Type 41) Bonded Wheels	17		• Large Bearing & Gears for High Duty Cycle & Longevity • Extended Neck	4 Inch (100 mm) 4 1/2 Inch (115 mm) 5 Inch (125 mm) 6 Inch (150 mm)	300RAE 400RAE 300RAE 400RAE	0.7 H.P. (600 W) 1.2 H.P. (900 W) 0.7 H.P. (600 W) 1.2 H.P. (900 W)
	18		• Small Head for Restricted Applications • Extended Neck	4 Inch (100 mm)	320RA 420RA	0.7 H.P. (600 W) 1.2 H.P. (900 W)
	19		• Large Head for Larger Size Abrasives	7 Inch (180 mm) 9 Inch (230 mm) 10 Inch (250 mm)	520RA	2.0 H.P. (1.5 kW)

LEVER STYLE



Safety Lever Standard Lever

EXHAUST DIRECTION

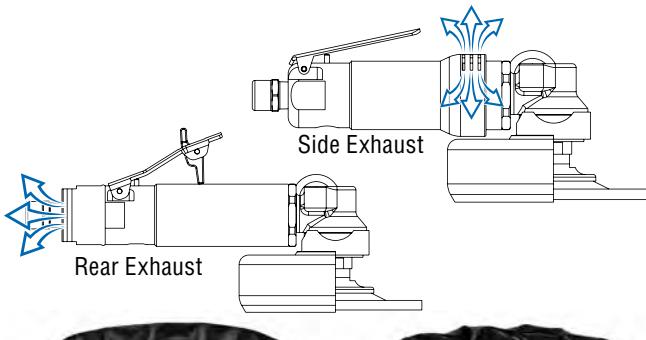

Rear exhaust overhose
for the 300 Series
Only available on Rear Exhaust tools.

Rear exhaust overhose
for the 400 Series
Only available on Rear Exhaust tools.

CASE MATERIAL




Aluminum Case Material Steel Case Material


The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.

Extended Neck vs Standard

Extended neck tools allow the operator to reach further into the workpiece. This extended reach coupled with the small heads found on Top Cat tools can allow fine finishing in the tightest of areas. Furthermore, the extended neck tools can be fitted with larger diameter abrasives allowing for more efficient material removal and better, more consistent surface finishes.

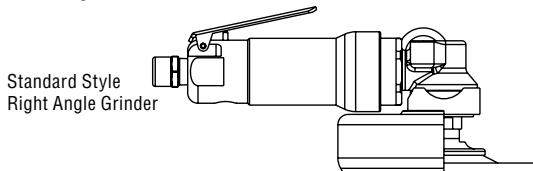

Standard Style
Right Angle Grinder

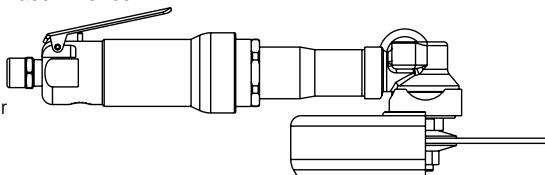


Right Angle Grinding & Cutting Tools

	3/8-24 x 1.0 Inch Spindle	5/8-11 x 1.0 Inch Spindle	3/8-24 x 0.6 Inch Spindle
Output Thread Size & Length			
Popular Wheel Sizes & Type	<ul style="list-style-type: none"> • 4 Inch Type 27 and Type 27 Cut-Off (Type 42) • 4 Inch Type 1 Cut-off (Type 41) 	<ul style="list-style-type: none"> • 4 1/2 Inch Type 27 and Type 27 Cut-Off (Type 42) • 4 1/2 Inch Type 1 Cut-Off (Type 41) 	4" Type 1 Cut-Off (Type 41)
Optional Wheel Sizes & Type	<ul style="list-style-type: none"> • 4 1/2 Inch Type 27 and Type 27 Cut-Off (Type 42) • 4 1/2 Inch Type 1 Cut-Off (Type 41) • 5 Inch Type 27 and Type 27 Cut-Off (Type 42) • 5 Inch Type 1 Cut-off (Type 41) • 6 Inch Type 1 Cut-off (Type 41) 	<ul style="list-style-type: none"> • 5 Inch Type 27 and Type 27 Cut-Off (Type 42) • 5 Inch Type 1 Cut-off (Type 41) • 6 Inch Type 1 Cut-off (Type 41) 	


Wheel Mounting for Right Angle Grinders

Type 27 and 42 Wheels with 3/8" ID Mounting Hole

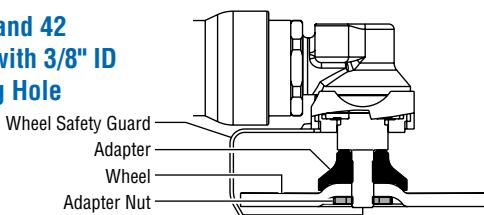

Adapter Set Number	Spindle Size
490-KR	3/8-24 x 0.6 Inch
490-K	3/8-24 x 1.0 Inch


Type 1 Cut-Off (Type 42) Wheels

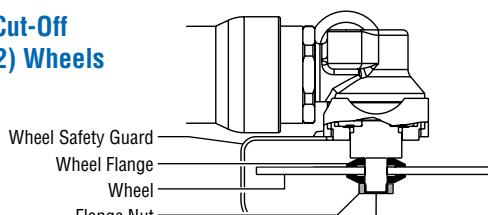


Part Number	Spindle Size	Wheel Mounting Hole
400-G-42	3/8-24	4" or Smaller
1100-682		4-1/2" or Larger
1100-680	5/8-11	

Ordered as individual parts


520RA Type 27 and 42 Wheels

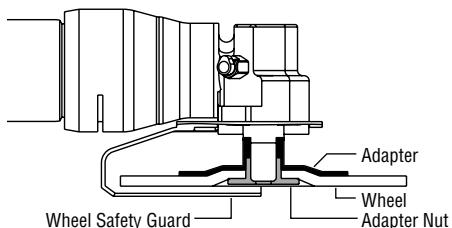

520RA Type 1 Cut-Off (Type 41) Wheels

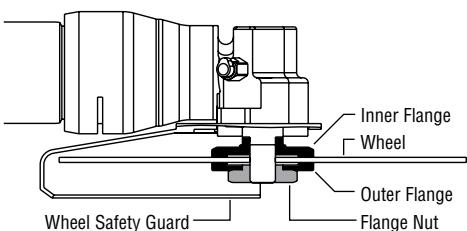


Type 27 and 42 Wheels with 5/8" or 7/8" ID Mounting

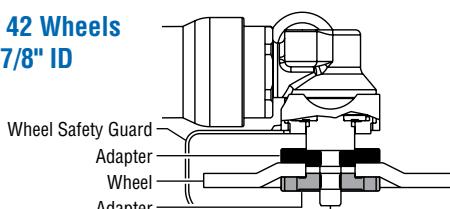

Part Number	Spindle Size	Wheel Mounting Hole
ADT27-354	3/8-24	5/8"
ADT27-375		7/8"
ADT27-575	5/8-11	

Ordered as individual parts

These Adapters can be used to mount either Type 27, Type 27 Cut-Off (Type 42) or Type 1 Cut-Off (Type 41) wheels

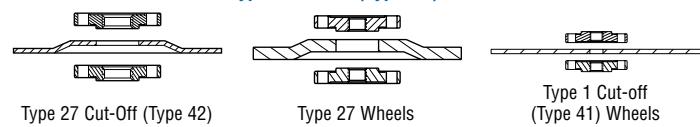



Depressed Center
Type 27 Wheel

Type 1 Cut-Off
(Type 41) Wheel

Type 27 Cut-Off
(Type 42) Wheel

4 Inch • 4 1/2 Inch
(100 mm) (115 mm)


Short Right Angle Grinders for Type 27, Type 27 Cut-Off (Type 42) & Type 1 Cut-Off (Type 41) Wheels

300RA Series



300RA4K;15000;427

400RA Series


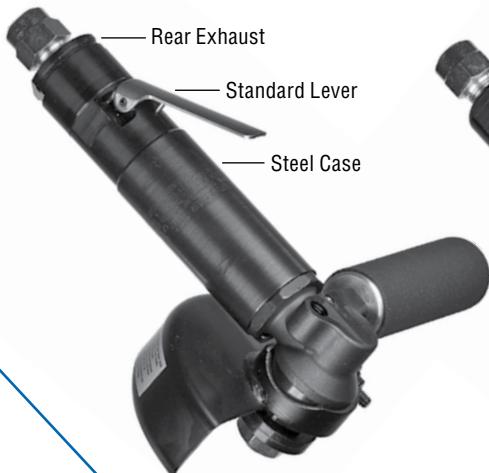


400RA2RS;10000;4527



400RA2SK;10000;4527

Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER		Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER	
			Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)				Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)
4 Inch (100 mm)	Rear	Standard Lever	300RA4;15000;427	300RA4;15000;441	4 1/2 Inch (115 mm)	Side	Standard Lever	400RA2S;10000;4527	400RA2S;10000;4541
		Safety Lever	300RA4K;15000;427	300RA4K;15000;441			Safety Lever	400RA2SK;10000;4527	400RA2SK;10000;4541
	Rear	Standard Lever	300RA2;13000;4527	300RA2;13000;4541		Rear	Standard Lever	400RA2RS;10000;4527	400RA2RS;10000;4541
		Safety Lever	300RA2K;13000;4527	300RA2K;13000;4541			Safety Lever	400RA2RSK;10000;4527	400RA2RSK;10000;4541

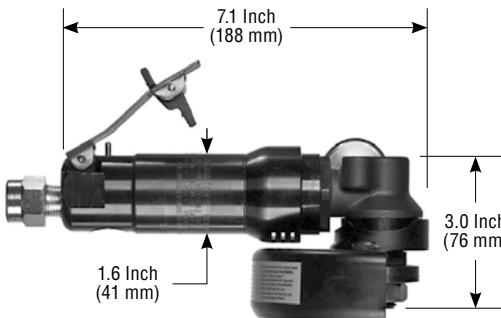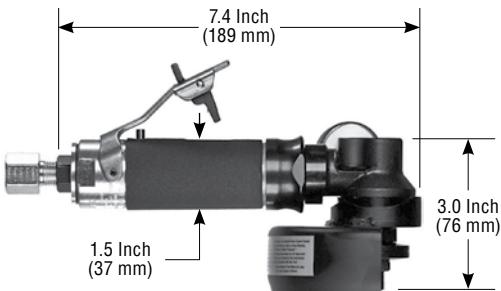

0.7 H.P.
(600 W)



2.8 Lbs. (1.3 Kg) Aluminum
3.2 Lbs. (1.5 Kg) Steel



25 cfm
(11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size



1.2 H.P.
(900 W)



3.2 Lbs. (1.5 Kg) Aluminum
3.8 Lbs. (1.7 Kg) Steel



35 cfm
(16.5 L/s) Max



3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

Wheel Size

Versions are Available for use with 5 Inch (125 mm) Wheels.

300RA Alternate Options



Aluminum Case
Steel Case

400RA Alternate Options



Aluminum Case
Steel Case

Wheel Mounting



Type 27 or Type 27 Cut-Off
(Type 42) Wheel



Type 1 or Type 1 Cut-Off
(Type 41) Wheel

Depressed Center
Type 27 Wheel

 Type 1 Cut-Off
(Type 41) Wheel

 Type 27 Cut-Off
(Type 42) Wheel


 4 Inch • 4 1/2 Inch • 6 Inch
(100 mm) (115 mm) (150 mm)

Extended Right Angle Grinders for Type 27, Type 27 Cut-Off (Type 42) & Type 1 Cut-Off (Type 41) Wheels


300RAE Series


300RAE2;13000;4527

400RAE Series

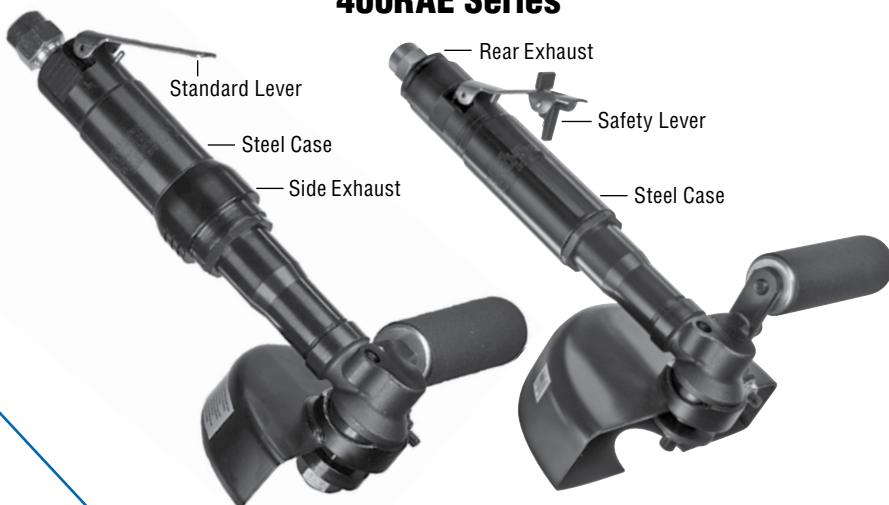

400RAE2S;10000;4527
400RAE2SRK;10000;641

Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER		Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER	
			Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)				Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)
4 Inch (100 mm)	Side	Standard Lever	300RAE4;15000;427	300RAE4;15000;441	4 1/2 Inch (115 mm)	Side	Standard Lever	400RAE2S;10000;4527	400RAE2S;10000;4541
		Safety Lever	300RAE4K;15000;427	300RAE4K;15000;441			Safety Lever	400RAE2SK;10000;4527	400RAE2SK;10000;4541
	Rear	Standard Lever	300RAE4R;15000;427	300RAE4R;15000;441		Rear	Standard Lever	400RAE2SR;10000;4527	400RAE2SR;10000;4541
		Safety Lever	300RAE4RK;15000;427	300RAE4RK;15000;441			Safety Lever	400RAE2SRK;10000;4527	400RAE2SRK;10000;4541
4 1/2 Inch (115 mm)	Side	Standard Lever	300RAE2;13000;4527	300RAE2;13000;4541		Side	Standard Lever	400RAE2S;10000;641	400RAE2S;10000;641
		Safety Lever	300RAE2K;13000;4527	300RAE2K;13000;4541			Safety Lever	400RAE2SK;10000;641	400RAE2SK;10000;641
	Rear	Standard Lever	300RAE2R;13000;4527	300RAE2R;13000;4541		Rear	Standard Lever	400RAE2SR;10000;641	400RAE2SR;10000;641
		Safety Lever	300RAE2RK;13000;4527	300RAE2RK;13000;4541			Safety Lever	400RAE2SRK;10000;641	400RAE2SRK;10000;641

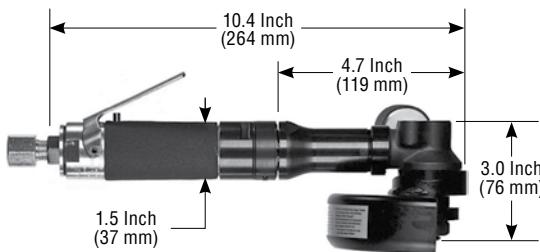
 0.7 H.P.
(600 W)

 25 cfm
(11.8 L/s) Max

 3.3 Lbs. (1.5 Kg) Aluminum
3.7 Lbs. (1.7 Kg) Steel

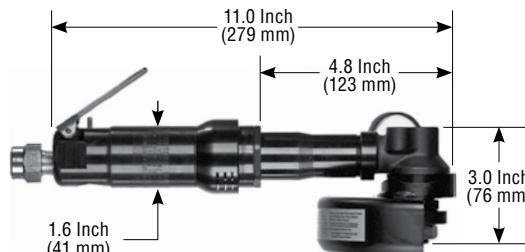 1/4" NPT Inlet
3/8" (10 mm) Hose Size

 1.2 H.P.
(900 W)

 35 cfm
(16.5 L/s) Max

 3.8 Lbs. (1.7 Kg) Aluminum
4.4 Lbs. (2.0 Kg) Steel

 3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

Wheel Size

Versions are Available for use with 5 Inch (125 mm) Wheels.

300RAE Alternate Options

Case Material



Aluminum Case

Steel Case

400RAE Alternate Options

Case Material



Aluminum Case

Steel Case

Wheel Mounting



Type 27 or Type 27 Cut-Off (Type 42) Wheel



Type 1 or Type 1 Cut-Off (Type 41) Wheel

Depressed Center
Type 27 Wheel

 Type 1 (Type 41)
Cut-off Wheel

 Type 27 Cut-Off
(Type 42) Wheel

4 Inch
(100 mm)

Extended Right Angle Grinders with Small Heads for Type 27 Depressed Center & Type 1 Cut-Off (Type 41) Wheels


320RA Series


320RA4K;15000;441

420RA Series



420RA4RS;13000;427
420RA4SK;13000;441

Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER		Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER	
			Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)				Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)
4 Inch (100 mm)	Side	Standard Lever	320RA4;15000;427	320RA4;15000;441	4 Inch (100 mm)	Side	Standard Lever	420RA4S;13000;427	420RA4S;13000;441
		Safety Lever	320RA4K;15000;427	320RA4K;15000;441			Safety Lever	420RA4SK;13000;427	420RA4SK;13000;441
	Rear	Standard Lever	320RA4R;15000;427	320RA4R;15000;441		Rear	Standard Lever	420RA4RS;13000;427	420RA4RS;13000;441
		Safety Lever	320RA4RK;15000;427	320RA4RK;15000;441			Safety Lever	420RA4RSK;13000;427	420RA4RSK;13000;441

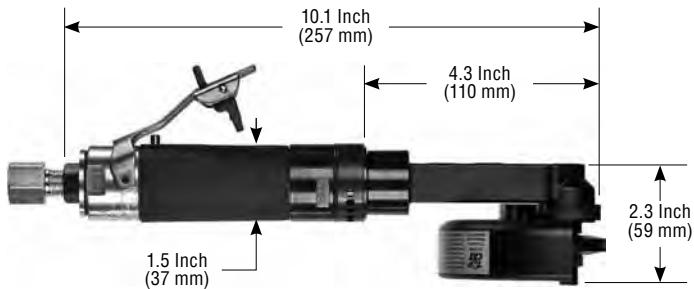
 0.7 H.P.
(600 W)

 2.8 Lbs. (1.2 Kg) Aluminum
3.2 Lbs. (1.4 Kg) Steel

 25 cfm
(11.8 L/s) Max

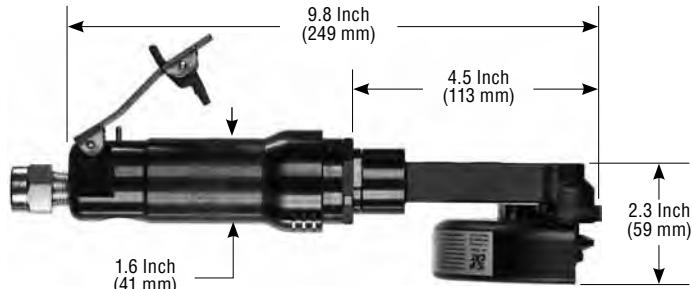 1/4" NPT Inlet
3/8" (10 mm) Hose Size

 1.2 H.P.
(900 W)

 3.1 Lbs. (1.4 Kg) Aluminum
3.5 Lbs. (1.6 Kg) Steel

 35 cfm
(16.5 L/s) Max

 3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

320RA Alternate Options

Case Material



Aluminum Case Steel Case

420RA Alternate Options

Case Material



Aluminum Case Steel Case


Wheel Mounting



Type 27 or Type 27 Cut-Off (Type 42) Wheel



Type 1 or Type 1 Cut-Off (Type 41) Wheel

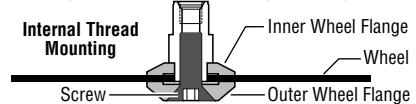
 Internal Thread Mounting
Screw
Inner Wheel Flange
Outer Wheel Flange
Wheel

Depressed Center
Type 27 WheelType 1 (Type 41)
Cut-off WheelType 27 Cut-Off
(Type 42) Wheel7 Inch • 9 Inch • 10 Inch
(180 mm) (230 mm) (250 mm)

Right Angle Grinders for Type 27, Type 27 Cut-Off (Type 42), Type 1 Cut-Off (Type 41) Wheels

520RA Series





520RAK;8000;727



520RA2L;6000;1041

Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER	
			Type 27 Wheels (Type 42)	Type 1 or Type 1 Cut-Off Wheels (Type 41)
7 Inch (180 mm)	6000 RPM	Standard Lever	520RAL;6000;727	
		Safety Lever	520RAK;6000;727	
	8000 RPM	Standard Lever	520RAL;8000;727	
		Safety Lever	520RAK;8000;727	
9 Inch (230 mm)	6000 RPM	Standard Lever	520RAL;6000;927	
		Safety Lever	520RAK;6000;927	
10 Inch (250 mm)	6000 RPM	Standard Lever		520RAL2;6000;1041
		Safety Lever		520RAK2;6000;1041

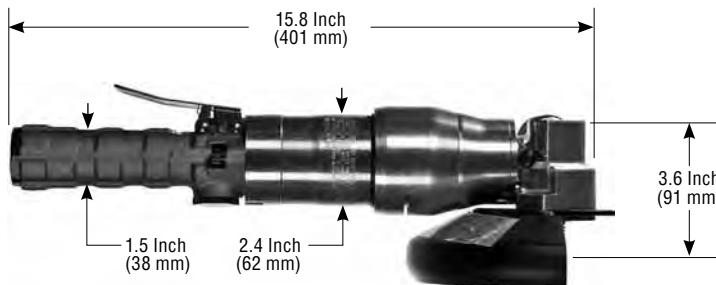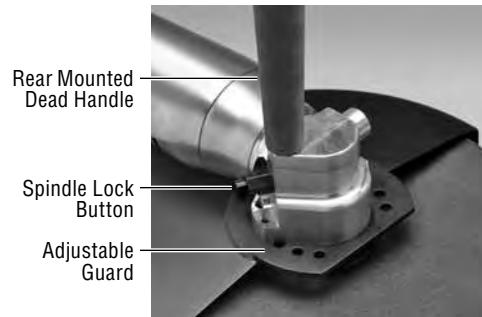2.0 H.P.
(1.5 kW)

7.8 Lbs. (3.5 Kg)

20 cfm (9.4 L/s) Free Speed
40 cfm (18.9 L/s) Max1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

520RA Alternate Options



Thumb Switch Safety Lever Standard Lever

Wheel Mounting

Type 27 or Type 27 Cut-Off
(Type 42) WheelType 1 or Type 1 Cut-Off
(Type 41) Wheel

The depressed center wheel adapters are not supplied as standard equipment with the tools. If you are using a wheel that requires the adapters, they must be purchased separately.


Right Angle Die Grinders

Page Number	Tool Configuration	Abrasive Size	Model Series	Power Output
22		<ul style="list-style-type: none"> • Large Bearing & Gears for High Duty Cycle & Longevity 	300RAD	0.7 H.P. (600 W)
			410RAD	1.2 H.P. (900 W)
23		<ul style="list-style-type: none"> • Large Bearing & Gears for High Duty Cycle & Longevity • Extended Neck 	300RAED	0.7 H.P. (600 W)
			410RAED	1.2 H.P. (900 W)
24		<ul style="list-style-type: none"> • Small Head for Restricted Applications 	330RAD	0.7 H.P. (600 W)
			340RAD	
25		<ul style="list-style-type: none"> • Small Head for Restricted Applications • Extended Neck 	320RAD	0.7 H.P. (600 W)
			420RAD	1.2 H.P. (900 W)
26		<ul style="list-style-type: none"> • Vertical Motor Design • No Gears 	300VGE	0.7 H.P. (600 W)

LEVER STYLE



EXHAUST DIRECTION

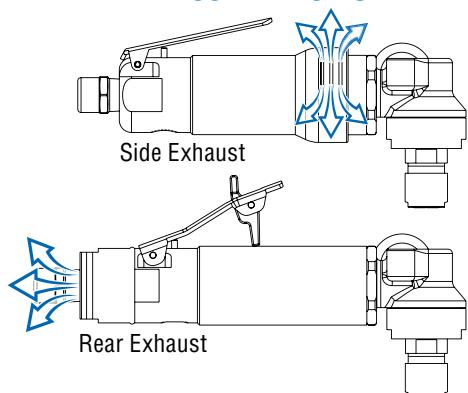

CASE MATERIAL



Rear exhaust overhose
for the 300 Series
Only available on Rear Exhaust tools.

Rear exhaust overhose
for the 400 Series
Only available on Rear Exhaust tools.

The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.

Right Angle Die Grinders

1/4 Inch (6 mm) - 3/8 Inch (8 mm) Mandrel Size (3/8 Inch Max.)



- 300RAD/300RAED
- 410RAD/410RAED

1/8 Inch (3 mm) - 1/4 Inch (6 mm) Mandrel Size (1/4 Inch Max.)



- 330RAD/340RAD
- 320RAD/420RAD



Carbide Burrs



Cartridge Roll w/ Rubber
Expanding Wheel



Flap Wheels



Mounted Stones



Sandpaper



Surface Finishing/
Conditioning Wheels




Cartridge Rolls

Your Abrasive/Mounting Accessory must be rated at higher speeds than the rating on the tools.


Please consult the abrasive manufacturer for proper speed ratings.

Extended Neck vs Standard

The extended neck option helps in regards to clearance issues when using various types of larger surface finishing abrasives. In these instances, the surface finishing abrasive can interfere with the area around the motor case normally used by the operator to grip the tool. The extended neck option moves the surface finishing abrasive forward which clears the area around the motor case for the operators hand.

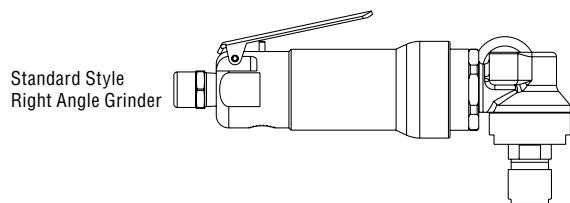




Standard Style
Right Angle Grinder

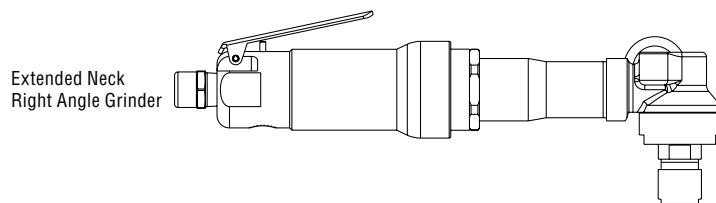

Extended Neck
Right Angle Grinder

Inserted Tool Mounting

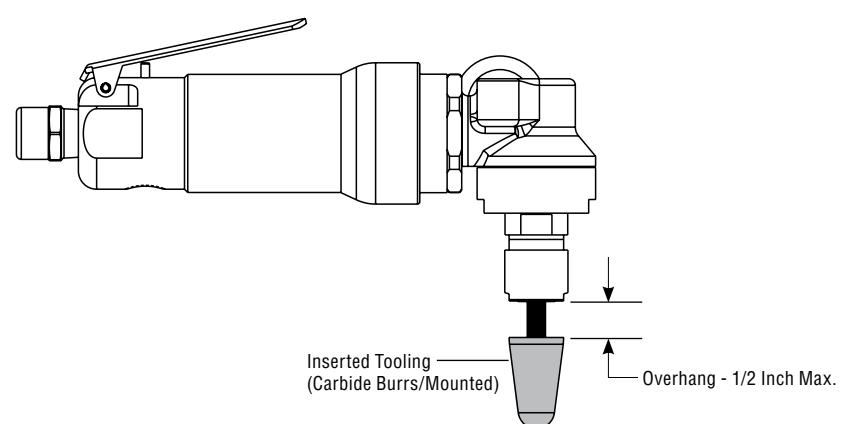

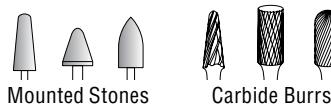

Mandrel Sizes: 1/4 Inch • 3/8 Inch
(6 mm) (8 mm)

Short Right Angle Collet Grinders

300RAD Series



300RADK;15000;1/4


410RAD Series



410RADSK;13000;1/4

410RADRS;13000;1/4

Lever Style	MODEL NUMBER	Exhaust Direction	Lever Style	MODEL NUMBER	
Standard Lever	300RAD;15000;1/4	Side	Standard Lever	410RADS;13000;1/4	
Safety Lever			Safety Lever	410RADSK;13000;1/4	
		Rear	Standard Lever	410RADRS;13000;1/4	
			Safety Lever	410RADRSK;13000;1/4	

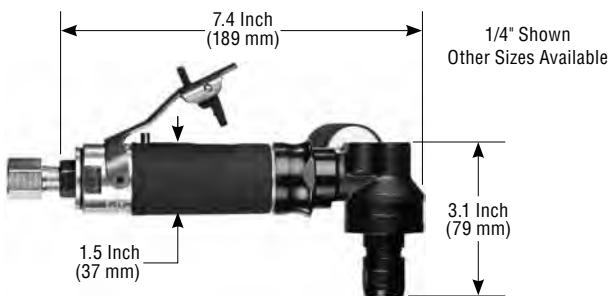

0.7 H.P.
(600 W)




2.2 Lbs. (1.0 Kg) Aluminum
2.8 Lbs. (1.3 Kg) Steel



25 cfm
(11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size

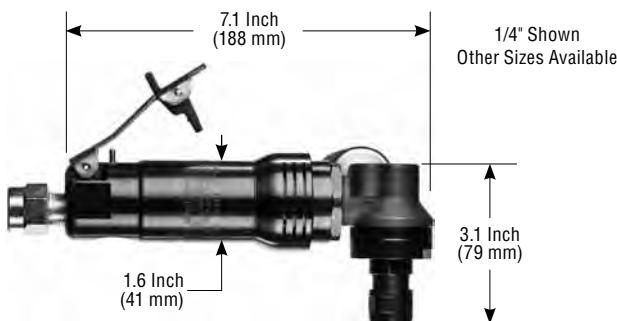

1.2 H.P.
(900 W)



35 cfm
(16.5 L/s) Max



3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)



The ER Heavy Duty Collet is Standard Equipment on 300RAD & 410RAD Series.

300RAD Alternate Options

Case Material



Aluminum Case
Steel Case

Lever Style*



Safety Lever
Standard Lever

410RAD Alternate Options

Case Material



Aluminum Case
Steel Case

Exhaust Direction



Rear Exhaust
Side Exhaust

Abrasive Mounting



*APPLIES TO BOTH TOOL SERIES

Extended Neck Right Angle Collet Grinders


300RAED Series


300RAED;15000;1/4

410RAED Series



410RAEDS;13000;1/4
410RAEDRSK;13000;1/4

Exhaust Direction	Lever Style	MODEL NUMBER	Exhaust Direction	Lever Style	MODEL NUMBER
Side	Standard Lever	300RAED;15000;1/4	Side	Standard Lever	410RAEDS;13000;1/4
	Safety Lever	300RAEDK;15000;1/4		Safety Lever	410RAEDSK;13000;1/4
Rear	Standard Lever	300RAEDR;15000;1/4	Rear	Standard Lever	410RAEDRS;13000;1/4
	Safety Lever	300RAEDRK;15000;1/4		Safety Lever	410RAEDRSK;13000;1/4

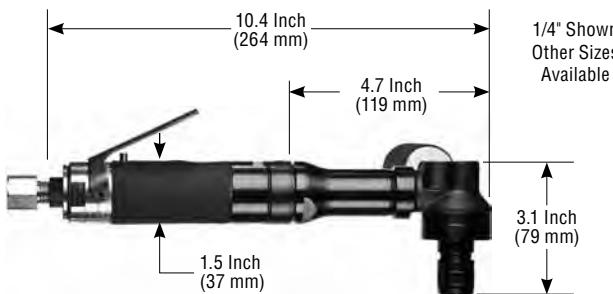
0.7 H.P.
(600 W)

2.7 Lbs. (1.2 Kg) Aluminum
3.1 Lbs. (1.4 Kg) Steel

25 cfm
(11.8 L/s) Max

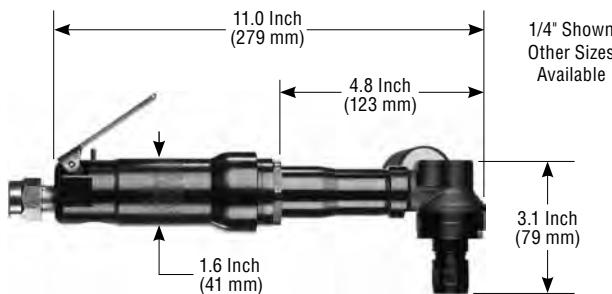1/4" NPT Inlet
3/8" (10 mm) Hose Size

1.2 H.P.
(900 W)

3.2 Lbs. (1.2 Kg) Aluminum
3.8 Lbs. (1.4 Kg) Steel

35 cfm
(16.5 L/s) Max

3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)



The ER Heavy Duty Collet is Standard Equipment on 300RAED & 410RAED Series.

300RAED Alternate Options

- | | |
|---------------|--------------|
| Case Material | Lever Style* |
| | |
| | |

Aluminum Case
Steel Case

Safety Lever
Standard Lever

410RAED Alternate Options

- | | |
|---------------|-------------------|
| Case Material | Exhaust Direction |
| | |
| | |


Aluminum Case
Steel Case

Rear Exhaust
Side Exhaust

Abrasive Mounting



*APPLIES TO BOTH TOOL SERIES




Short Right Angle Collet Grinders

330RAD/340RAD Series



330RADK;12000;1/4

Maximum Rated Operating Speed	Lever Style	Model Number
12,000 RPM	Standard Lever	330RAD;12000;1/4
	Safety Lever	330RADK;12000;1/4
20,000 RPM	Standard Lever	340RAD;20000;1/4
	Safety Lever	340RADK;20000;1/4

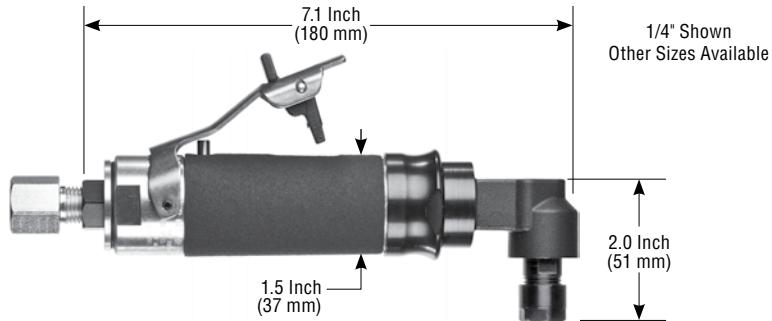

0.7 H.P.
(600 W)



**1.6 Lbs. (0.7 Kg) Aluminum
2.0 Lbs. (0.9 Kg) Steel**



25 cfm
(11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size



STANDARD EQUIPMENT

- Tool
 - Operating Instructions and Service Manual
 - Wrenches
(sizes based on options)



The ER Heavy Duty Collet is Standard Equipment on 330RAD & 340RAD Series.

330RAD/340RAD Alternate Options




Safety Lever

Standar
Lever

Ste
Ca

Abrasive Mounting

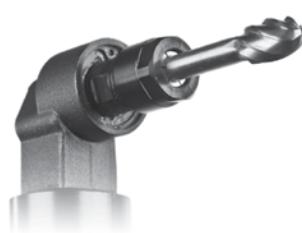

Extended Right Angle Collet Grinders



320RAD Series


320RADK;20000;1/4

420RAD Series


420RADSK;13000;1/4
420RADRS;13000;1/4

Exhaust Direction	Lever Style	MODEL NUMBER	Exhaust Direction	Lever Style	MODEL NUMBER
Side	Standard Lever	320RAD;20000;1/4	Side	Standard Lever	420RADS;13000;1/4
	Safety Lever	320RADK;20000;1/4		Safety Lever	420RADSK;13000;1/4
Rear	Standard Lever	320RADR;20000;1/4	Rear	Standard Lever	420RADRS;13000;1/4
	Safety Lever	320RADRK;20000;1/4		Safety Lever	420RADRSK;13000;1/4

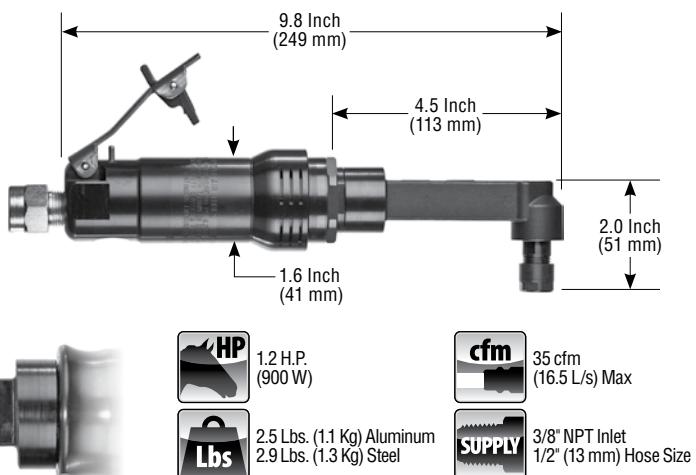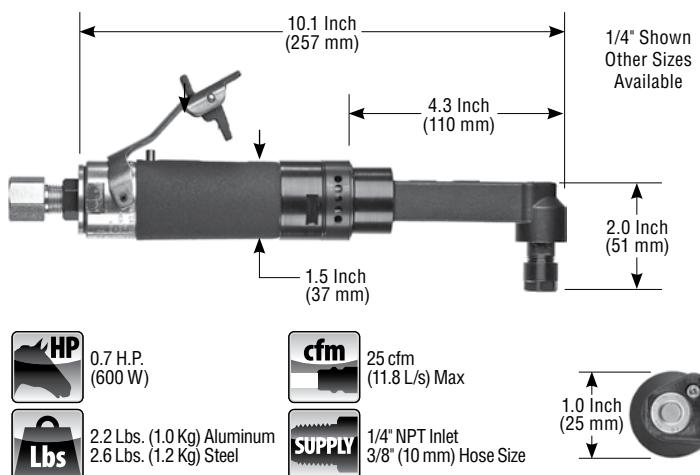

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)



The ER Heavy Duty Collet is Standard Equipment on 320RAED & 420RAED Series.

320RAD Alternate Options

Case Material	Lever Style*
Aluminum Case	Safety Lever
Steel Case	Standard Lever

*APPLIES TO BOTH TOOL SERIES

420RAED Alternate Options

Case Material	Exhaust Direction*
Aluminum Case	Rear Exhaust
Steel Case	Side Exhaust

Abrasive Mounting






Mandrel Sizes: 1/8 Inch • 3/8 Inch
(3 mm) (8 mm)


Vertical Collet Grinders

300VGE Series

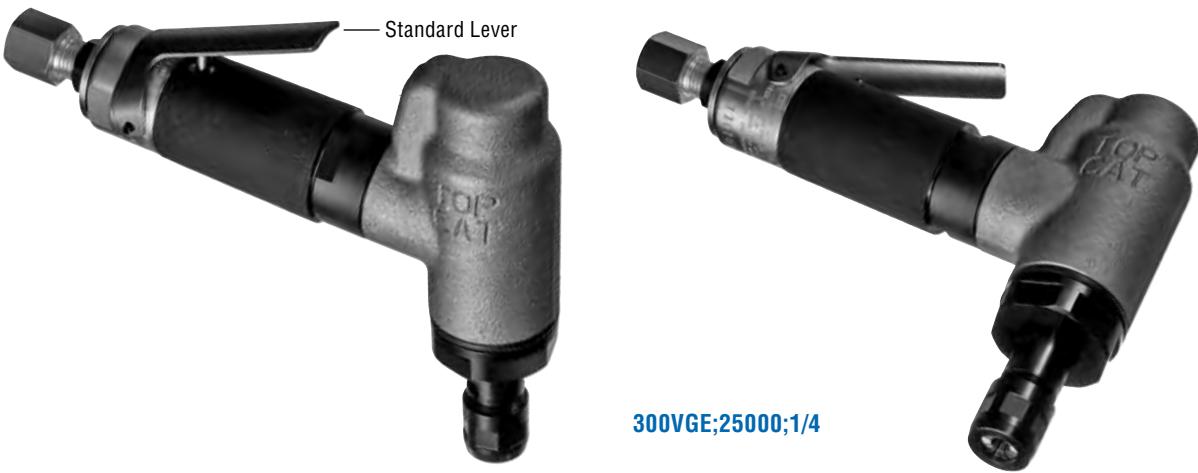

300VGE;25000;1/4

	Maximum Rated Operating Speed	Lever Style	MODEL NUMBER
Double Front Bearing ER Style Insert Collet 3/8 Inch (8 mm) Maximum	30,000 RPM	Standard Lever	300VGE;30000;1/4
		Safety Lever	300VGEK;30000;1/4
	25,000 RPM	Standard Lever	300VGE;25000;1/4
		Safety Lever	300VGEK;25000;1/4
	20,000 RPM	Standard Lever	300VGE;20000;1/4
		Safety Lever	300VGEK;20000;1/4
	18,000 RPM	Standard Lever	300VGE;18000;1/4
		Safety Lever	300VGEK;18000;1/4

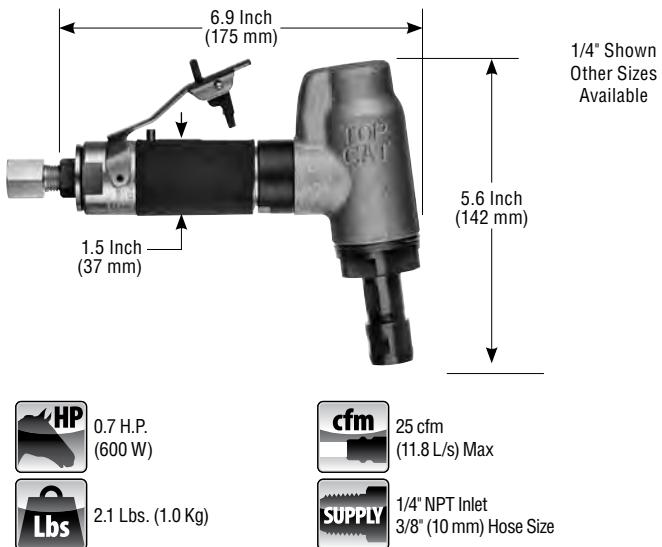

0.7 H.P.
(600 W)



2.1 Lbs. (1.0 Kg)



25 cfm
(11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)



The ER Heavy Duty Collet is Standard Equipment on 300VGE Series.

300VGE Alternate Options

Lever Style



Safety Lever Standard Lever

Abrasive Mounting



RIGHT ANGLE GRINDERS



Right Angle Sanders, Buffers & Polishers

Surface Conditioning Abrasives	Page Number	Tool Configuration	Abrasive Size	Model Series	Power Output
Non-Woven Nylon Web or Convolute Abrasives	30		• Large Bearing & Gears for High Duty Cycle & Longevity	3 Inch (75 mm) 300RA 307RA 400RA 410RA 407RA	0.7 H.P. (600 W)
	31		• Large Bearing & Gears for High Duty Cycle & Longevity • Extended Neck	3 Inch (75 mm) 300RAE 317RAE 307RAE 400RAE 410RAE 407RAE	0.7 H.P. (600 W)
	32		• Small Head for Restricted Applications	2 Inch (50 mm) 330RA 340RA	0.7 H.P. (600 W)
	33		• Small Head for Restricted Applications • Extended Neck	2 Inch (50 mm) 320RA 420RA	0.7 H.P. (600 W) 1.2 H.P. (900 W)
	34		• Extremely Small Head for Restricted Applications • Extended Neck	2 Inch (50 mm) 3101RA 4101RA	0.7 H.P. (600 W) 1.2 H.P. (900 W)
	35		• Heavy-Duty, Large Head for Longer Life.	5 Inch (125 mm) 4620RA 4520RA	0.7 H.P. (600 W) 1.2 H.P. (900 W)
	35		• Heavy-Duty, Large Head for Longer Life.	7 Inch (180 mm) 520RA	1.2 H.P. (900 W) 2.0 H.P. (1.5 kW)
	36		• Planetary Gear Systems for Low Speed Applications	5 Inch (125 mm) 300RA(X)M 310RA(X)M	0.7 H.P. (600 W)
36		• Planetary Gear Systems for Low Speed Applications	7 Inch (180 mm) 400RA(X)M 410RA(X)M 4620RA(X)M	1.2 H.P. (900 W)	
37		• Planetary Gear Systems for Low Speed Applications • Extended Neck	5 Inch (125 mm) 300RAE(X)M 310RAE(X)M	0.7 H.P. (600 W)	
37		• Planetary Gear Systems for Low Speed Applications • Extended Neck	7 Inch (180 mm) 400RAE(X)M 410RAE(X)M	1.2 H.P. (900 W)	

LEVER STYLE



Safety Lever

Regular Lever

EXHAUST DIRECTION



Rear Exhaust

Side Exhaust

Rear exhaust overhose
for the 300 Series

Only available on Rear Exhaust tools.

Rear exhaust overhose
for the 400 Series

Only available on Rear Exhaust tools.

CASE MATERIAL



Aluminum Case Material Steel Case Material


The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.

Right Angle Sanders, Buffers & Polishers


	3/8-24 x 1.0 Inch Spindle	5/8-11 x 1.0 Inch Spindle	1/4-20 X 1/2 Inch Spindle
Output Thread Size & Length			
Popular Sanding Pad Sizes	• 4 Inch	• 5 Inch • 7 Inch	• 2 Inch • 3 Inch
Optional Sanding Pad Sizes	• 5 Inch	• 4 Inch	

Extended Neck vs Standard

Extended neck tools allow the operator to reach further into the work-piece. This extended reach coupled with the small heads found on Top Cat tools can allow fine finishing in the tightest of areas. Furthermore, the extended neck tools can be fitted with larger diameter abrasives allowing for more efficient material removal and better, more consistent surface finishes.

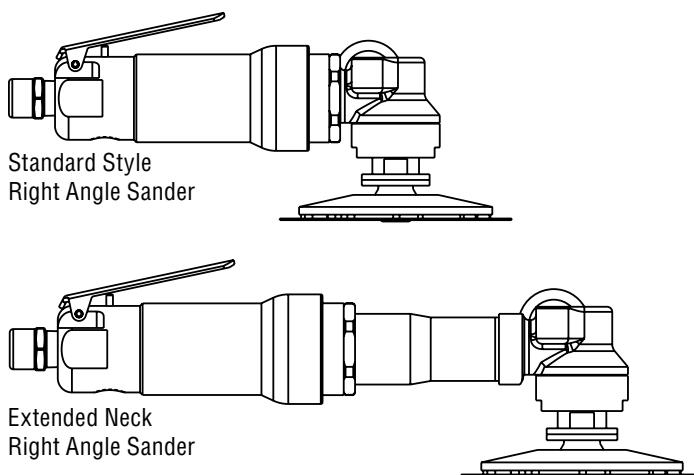

Sanding Disk Mounting for Right Angle Sanders

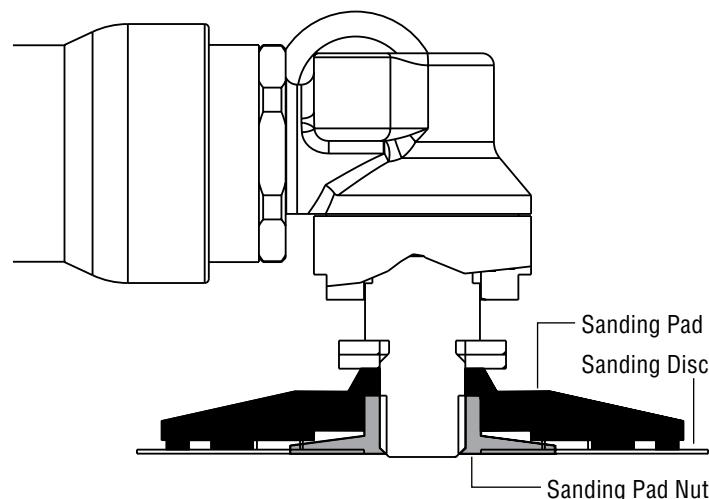

Spiralcool® Pads

Part Number	Threads	Size	Description	Maximum Speed
889271-A	3/8-24	4 Inch (100 mm)	Sanding Pad	12000 R.P.M.
849848-A	3/8-24	5 Inch (125 mm)	Sanding Pad	10000 R.P.M.
889271	5/8-11	4 Inch (100 mm)	Sanding Pad	12000 R.P.M.
849848	5/8-11	5 Inch (125 mm)	Sanding Pad	10000 R.P.M.
849913	5/8-11	7 Inch (180 mm)	Sanding Pad	8500 R.P.M.
849914	5/8-11	9 Inch (230 mm)	Sanding Pad	6500 R.P.M.
849259-A	3/8-24		Sanding Pad Nut	
849259	5/8-11		Sanding Pad Nut	
102-SPWR			Pad Nut Wrench	



3 Inch • 5 Inch
(75 mm) (125 mm)

Short Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

300RA Series & 307RA Series



300RA6K;15000

307RA2K;10000;5SP

400RA Series & 407RA Series




400RA2R;10000;5SP

400RA2K;10000;5SP

RIGHT ANGLE SANDERS

Sanding Pad Size	Exhaust Direction	Spindle Output	Lever Style	Model Number	Sanding Pad Size	Exhaust Direction	Spindle Output	Lever Style	Model Number	
3 Inch (75 mm)	Rear	1/4-20	Standard Lever	300RA6;15000	4 Inch (100 mm)	Side	3/8-24	Standard Lever	400RA4;10000;4SP	
			Safety Lever	300RA6K;15000				Safety Lever	400RA4K;10000;4SP	
4 Inch (100 mm)		3/8-24	Standard Lever	307RA4;10000;4SP		Rear		Standard Lever	400RA4R;10000;4SP	
			Safety Lever	307RA4K;10000;4SP				Safety Lever	400RA4KR;10000;4SP	
4 1/2 Inch (115 mm)		5/8-11	Standard Lever	300RA2;15000;45SP		Side	3/8-24	Standard Lever	410RA2;13000;45SP	
			Safety Lever	300RA2K;15000;45SP				Safety Lever	410RA2K;13000;45SP	
5 Inch (125 mm)			Standard Lever	307RA2;10000;5SP				Standard Lever	410RA2R;13000;45SP	
			Safety Lever	307RA2K;10000;5SP				Safety Lever	410RA2KR;13000;45SP	
						4 1/2 Inch (115 mm)	Side	Standard Lever	400RA2;10000;5SP	
								Safety Lever	400RA2K;10000;5SP	
						Rear	5/8-11	Standard Lever	400RA2R;10000;5SP	
								Safety Lever	400RA2KR;10000;5SP	
						5 Inch (125 mm)	Side	Standard Lever	407RA2;8000;5SP	
								Safety Lever	407RA2K;8000;5SP	

The 307RA is available with rated speeds within the range of 7000 to 10000 RPM.

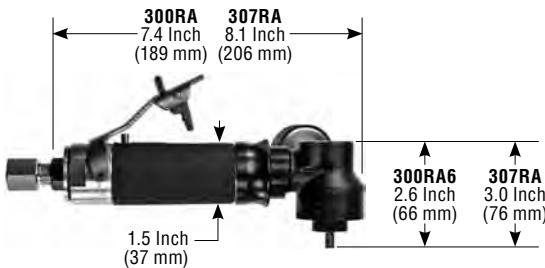

0.7 H.P.
(600 W)



2.6 Lbs. (1.2 Kg) Aluminum
3.0 Lbs. (1.4 Kg) Steel



300RA: 25 cfm (11.8 L/s) Max
307RA: 15 cfm (7.1 L/s) Free Speed
25 cfm (11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size



1.2 H.P.
(900 W)



3.0 Lbs. (1.4 Kg) Aluminum
3.6 Lbs. (1.6 Kg) Steel



400RA: 35 cfm (16.5 L/s) Max
407RA: 20 cfm (9.4 L/s) Free Speed
35 cfm (16.5 L/s) Max



3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300RA & 307RA Alternate Options


Case Material



Aluminum Case Steel Case

300-400RA & 307-407RA Alternate Options

Lever Style



Safety Lever Standard Lever

400RA & 407RA Alternate Options

Case Material



Aluminum Case Steel Case

Surface Conditioning Abrasive Mounting




Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives
300RAE Series & 307RAE Series

300RAE6K;15000
307RAE2K;10000;5SP
400RAE Series & 407RAE Series

400RAE2R;10000;5SP
400RAE2K;10000;5SP


Sanding Pad Size	Exhaust Direction	Spindle Output	Lever Style	Model Number	Sanding Pad Size	Exhaust Direction	Spindle Output	Lever Style	Model Number	
3 Inch (75 mm)	Rear	1/4-20	Standard Lever	300RAE6;15000	4 Inch (100 mm)	Side	3/8-24	Standard Lever	400RAE4;10000;4SP	
			Safety Lever	300RAE6K;15000				Safety Lever	400RAE4K;10000;4SP	
4 Inch (100 mm)		3/8-24	Standard Lever	317RAE4;12000;4SP		Rear		Standard Lever	400RAE4R;10000;4SP	
			Safety Lever	317RAE4K;12000;4SP				Safety Lever	400RAE4KR;10000;4SP	
4 1/2 Inch (115 mm)		5/8-11	Standard Lever	300RAE2;15000;45SP		4 1/2 Inch (115 mm)	Side	Standard Lever	410RAE2;13000;45SP	
			Safety Lever	300RAE2K;15000;45SP				Safety Lever	410RAE2K;13000;45SP	
5 Inch (125 mm)			Standard Lever	307RAE2;10000;5SP				Standard Lever	410RAE2R;13000;45SP	
			Safety Lever	307RAE2K;10000;5SP				Safety Lever	410RAE2KR;13000;45SP	

The 307RAE is available with rated speeds within the range of 7000 to 10000 RPM.

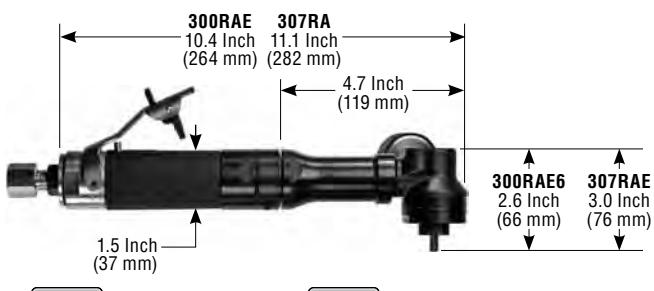
**0.7 H.P.
(600 W)**

**300RAE: 25 cfm (11.8 L/s) Max
307RAE: 15 cfm (7.1 L/s) Free Speed
25 cfm (11.8 L/s) Max**

**3.1 Lbs. (1.4 Kg) Aluminum
3.5 Lbs. (1.6 Kg) Steel**

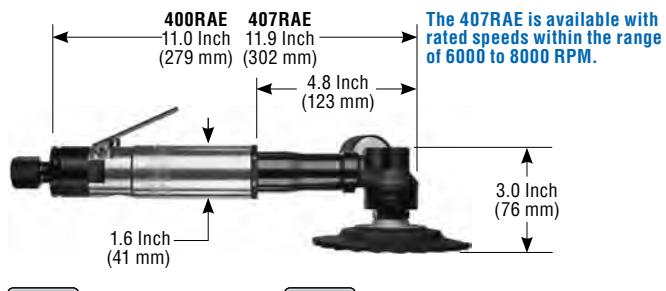**1/4" NPT Inlet
3/8" (10 mm) Hose Size**

**1.2 H.P.
(900 W)**

**400RAE: 35 cfm (16.5 L/s) Max
407RAE: 20 cfm (9.4 L/s) Free Speed
35 cfm (16.5 L/s) Max**

**3.6 Lbs. (1.6 Kg) Aluminum
4.2 Lbs. (1.9 Kg) Steel**

**3/8" NPT Inlet
1/2" (13 mm) Hose Size**
STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300RAE & 307RAE Alternate Options

Case Material


Aluminum Case
Steel Case
300-400RAE & 307-407RAE Alternate Options

Lever Style


Safety Lever
Standard Lever
400RAE & 407RAE Alternate Options

Case Material


Aluminum Case
Steel Case
Surface Conditioning Abrasive Mounting





2 Inch
(50 mm)

Short Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

330RA/340RA Series



Maximum Sanding Pad Size	Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER	
2 Inch (50 mm) 1/4-20 Spindle Output Thread	12000 RPM	Rear	Standard Lever	330RA6;12000	
			Safety Lever	330RA6K;12000	
	20000 RPM		Standard Lever	340RA6;20000	
			Safety Lever	340RA6K;20000	

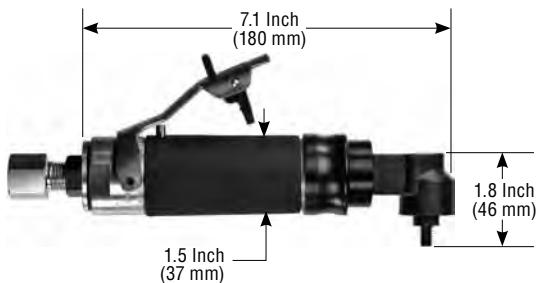

0.7 H.P.
(600 W)



1.5 Lbs. (0.7 Kg) Aluminum
1.9 Lbs. (0.9 Kg) Steel



25 cfm
(11.8 L/s) Max




1/4" NPT Inlet
3/8" (10 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

330RA/340RA Alternate Options

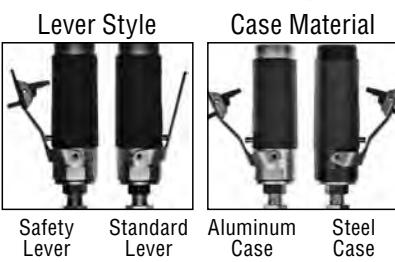

Surface Conditioning Abrasive Mounting



2 Inch
(50 mm)

Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

320RA Series



420RA Series





320RA6K;15000

420RA6R;13000

420RA6K;13000

Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	Side	Standard Lever	320RA6;20000	2 Inch (50 mm) 1/4-20 Spindle Output Thread	Side	Standard Lever	420RA6;13000
		Safety Lever	320RA6K;20000			Safety Lever	420RA6K;13000
	Rear	Standard Lever	320RA6R;20000		Rear	Standard Lever	420RA6R;13000
		Safety Lever	320RA6KR;20000			Safety Lever	420RA6KR;13000

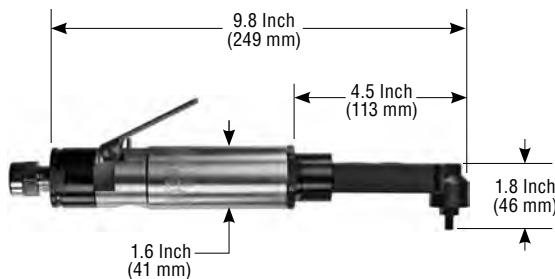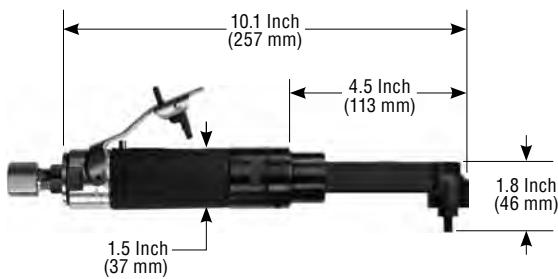0.7 H.P.
(600 W)2.1 Lbs. (1.0 Kg) Aluminum
2.5 Lbs. (1.1 Kg) Steel25 cfm
(11.8 L/s) Max1/4" NPT Inlet
3/8" (10 mm) Hose Size1.2 H.P.
(900 W)2.4 Lbs. (1.1 Kg) Aluminum
3.0 Lbs. (1.4 Kg) Steel35 cfm
(16.5 L/s) Max3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

320RA Alternate Options

Case Material



Aluminum Case Steel Case

320-420RA Alternate Options

Lever Style



Safety Lever Standard Lever

420RA Alternate Options

Case Material



Aluminum Case Steel Case

Surface Conditioning Abrasive Mounting





2 Inch
(50 mm)

Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

3101RA Series



Safety Lever
Aluminum Case
Side Exhaust

4101RA Series



Rear Exhaust
Standard Lever
Aluminum Case
Side Exhaust



3101RA6K;23000

Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	Side	Standard Lever	3101RA6;23000
		Safety Lever	3101RA6K;23000
	Rear	Standard Lever	3101RA6R;23000
		Safety Lever	3101RA6KR;23000

4101RA6R;15000

Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	Side	Standard Lever	4101RA6;15000
		Safety Lever	4101RA6K;15000
	Rear	Standard Lever	4101RA6R;15000
		Safety Lever	4101RA6KR;15000

4101RA6K;15000

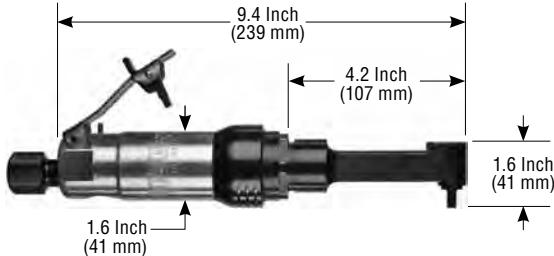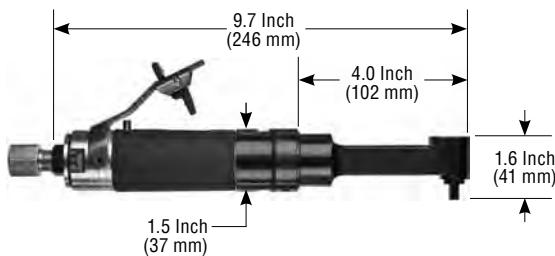

0.7 H.P.
(600 W)



2.0 Lbs. (0.9 Kg) Aluminum
2.4 Lbs. (1.1 Kg) Steel



25 cfm
(11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size



1.2 H.P.
(900 W)



2.3 Lbs. (1.0 Kg) Aluminum
2.9 Lbs. (1.3 Kg) Steel



35 cfm
(16.5 L/s) Max



3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

3101RA Alternate Options

Case Material



Aluminum Case
Steel Case

3101-4101RA Alternate Options

Lever Style



Safety Lever
Standard Lever

4101RA Alternate Options

Case Material



Aluminum Case
Steel Case

Surface Conditioning Abrasive Mounting





5 Inch • 7 Inch
(125 mm) (180 mm)

Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

4520RA Series



4520RAR;6000;7SP




4520RAK;6000;7SP

520RA Series



520RAK;8000;7SP

Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER	Sanding Pad Size	Lever Style	MODEL NUMBER
5 Inch (125 mm)	Side	Standard Lever	4620RA;10000;5SP	7 Inch (180 mm)	Standard Lever	520RA;8000;7SP
		Safety Lever	4620RAK;10000;5SP			
5/8-11 Spindle Output Thread	Rear	Standard Lever	4620RAR;10000;5SP			
		Safety Lever	4620RAKR;10000;5SP			
7 Inch (180 mm)	Side	Standard Lever	4520RA;6000;7SP			
		Safety Lever	4520RAK;6000;7SP			
5/8-11 Spindle Output Thread	Rear	Standard Lever	4520RAR;6000;7SP	7 Inch (180 mm)	Standard Lever	520RA;8000;7SP
		Safety Lever	4520RAKR;6000;7SP	5/8-11 Spindle Output Thread	Safety Lever	520RAK;8000;7SP

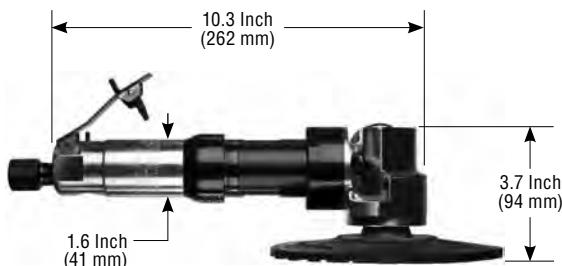

1.2 H.P.
(900 W)




5.6 Lbs. (2.5 Kg) Aluminum
6.2 Lbs. (2.8 Kg) Steel



35 cfm
(16.5 L/s) Max



3/8" NPT Inlet
1/2" (13mm) Hose Size

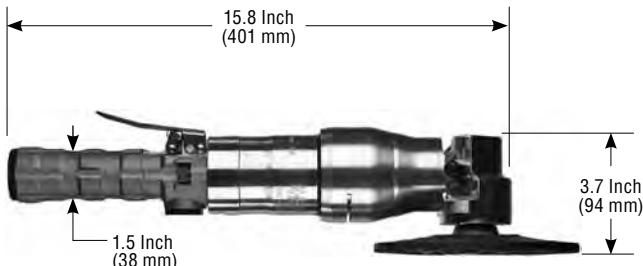

2.0 H.P.
(1.5 kW)



7.6 Lbs. (3.4 Kg)



20 cfm (9.4 L/s) Free Speed
40 cfm (18.9 L/s) Max




3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

4520RA Alternate Options



Safety Lever Standard Lever



Aluminum Case Steel Case



Rear Exhaust Side Exhaust

Surface Conditioning Abrasive Mounting



Geared Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives


300RA(X)M Series


300RA3M2;4000;5SP


400RA(X)M Series


400RA3M2K;4000;7SP

4620RA(X)M Series

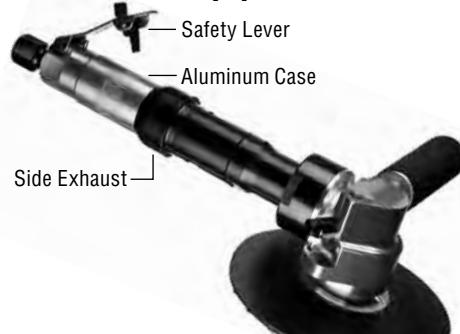

4620RA3M2K;4200;7SP

Sanding Pad Size	Max. Rated Speed	Lever Style	SHORT RA HEAD MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
5 Inch (125 mm) 5/8-11 Spindle Output Thread	5200 RPM	Standard Lever	310RA3M2;5200;5SP	7 Inch (180 mm)	Side	3800 RPM	Standard Lever	410RA3M2;3800;7SP	7 Inch (180 mm)	Side	4200 RPM	Standard Lever	4620RA3M2;4200;7SP
		Safety Lever	310RA3M2K;5200;5SP			2900 RPM	Safety Lever	410RA3M2K;3800;7SP			3100 RPM	Safety Lever	4620RA5M2;3100;7SP
	4000 RPM	Standard Lever	300RA3M2;4000;5SP			2200 RPM	Standard Lever	400RA3M2;2900;7SP			1900 RPM	Standard Lever	4620RA8M2;1900;7SP
		Safety Lever	300RA3M2K;4000;5SP			1300 RPM	Safety Lever	400RA5M2;2200;7SP			4200 RPM	Safety Lever	4620RA3M2R;4200;7SP
	3000 RPM	Standard Lever	300RA5M2;3000;5SP			3800 RPM	Standard Lever	400RA8M2;1300;7SP			3100 RPM	Safety Lever	4620RA5M2R;3100;7SP
		Safety Lever	300RA5M2K;3000;5SP			2900 RPM	Safety Lever	400RA3MR;3800;7SP			1900 RPM	Standard Lever	4620RA8M2R;1900;7SP
	1800 RPM	Standard Lever	300RA8M2;1800;5SP			2200 RPM	Standard Lever	400RA5M2R;2200;7SP			4200 RPM	Safety Lever	4620RA3M2RK;4200;7SP
		Safety Lever	300RA8M2K;1800;5SP			1300 RPM	Safety Lever	400RA8M2R;1300;7SP			3100 RPM	Safety Lever	4620RA5M2RK;3100;7SP
		Rear	3800 RPM		Standard Lever	400RA8M2R;2900;7SP	1900 RPM	Standard Lever			4620RA8M2R;1900;7SP		
			2900 RPM		Safety Lever	400RA3M2RK;2900;7SP	4200 RPM	Safety Lever			4620RA8M2RK;4200;7SP		
			2200 RPM		Standard Lever	400RA5M2RK;2200;7SP	3100 RPM	Safety Lever			4620RA8M2RK;3100;7SP		
			1300 RPM		Safety Lever	400RA8M2RK;1300;7SP	1900 RPM	Standard Lever			4620RA8M2RK;1900;7SP		
			3800 RPM		Standard Lever	400RA8M2RK;1300;7SP	4200 RPM	Safety Lever			4620RA8M2RK;4200;7SP		
			2900 RPM		Safety Lever	400RA3M2RK;1300;7SP	3100 RPM	Safety Lever			4620RA8M2RK;3100;7SP		
			2200 RPM		Standard Lever	400RA5M2RK;2200;7SP	1900 RPM	Standard Lever			4620RA8M2RK;1900;7SP		
			1300 RPM		Safety Lever	400RA8M2RK;1300;7SP	4200 RPM	Safety Lever			4620RA8M2RK;4200;7SP		

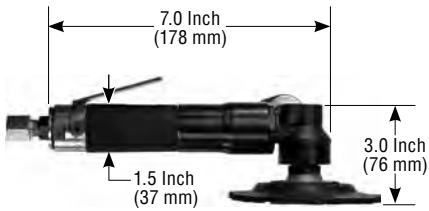
 0.7 H.P.
(600 W)

 25 cfm
(11.8 L/s) Max

 3.6 Lbs (1.6 Kg)
Aluminum
4.0 Lbs (1.8 Kg)
Steel

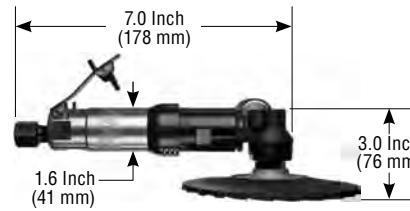 1/4" NPT Inlet
3/8" (10 mm) Hose Size

 1.2 H.P.
(900 W)

 35 cfm
(16.5 L/s) Max

 4.5 Lbs (2.0 Kg)
Aluminum
5.1 Lbs (2.3 Kg)
Steel

 3/8" NPT Inlet
1/2" (13 mm) Hose Size

 1.2 H.P.
(900 W)

 35 cfm
(16.5 L/s) Max

 6.3 Lbs (2.9 Kg)
Aluminum
6.9 Lbs (3.1 Kg)
Steel

 3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300RA(X)M, 400RA(X)M & 4620RA(X)M Alternate Options

Lever Style



Case Material



Exhaust Direction



Surface Conditioning Abrasive Mounting



Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives
300RAE(X)M Series

400RAE(X)M Series


Sanding Pad Size	Max. Rated Speed	Lever Style	MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
5 Inch (125 mm) 5/8-11 Spindle Output Thread	5200 RPM	Standard Lever	310RAE3M2;5200;5SP	7 Inch (180 mm) 5/8-11 Spindle Output Thread	Side	3800 RPM	Standard Lever	410RAE3M2;3800;7SP
		Safety Lever	310RAE3M2K;5200;5SP			2900 RPM	Safety Lever	410RAE3M2K;3800;7SP
	4000 RPM	Standard Lever	300RAE3M2;4000;5SP			2200 RPM	Standard Lever	400RAE3M2;2900;7SP
		Safety Lever	300RAE3M2K;4000;5SP			1300 RPM	Standard Lever	400RAE5M2;2200;7SP
	3000 RPM	Standard Lever	300RAE5M2;3000;5SP			3800 RPM	Safety Lever	400RAE5M2K;2200;7SP
		Safety Lever	300RAE5M2K;3000;5SP			2900 RPM	Standard Lever	400RAE8M2;1300;7SP
	1800 RPM	Standard Lever	300RAE8M2;1800;5SP		Rear	2200 RPM	Safety Lever	400RAE8M2K;1300;7SP
		Safety Lever	300RAE8M2K;1800;5SP			1300 RPM	Standard Lever	410RAE3M2R;3800;7SP


0.7 H.P.
(600W)

25 cfm
(11.8 L/s) Max

4.2 lbs (1.9 Kg) Aluminum
4.6 lbs (2.1 Kg) Steel

1/4" NPT Inlet
3/8" (10 mm) Hose Size

1.2 H.P.
(900 W)


35 cfm
(16.5 L/s) Max

5.0 Lbs. (2.3 Kg) Aluminum
5.6 Lbs. (2.5 Kg) Steel


3/8" NPT Inlet
1/2" (13mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300RAE(X)M & 400RAE(X)M Alternate Options

Surface Conditioning Abrasive Mounting

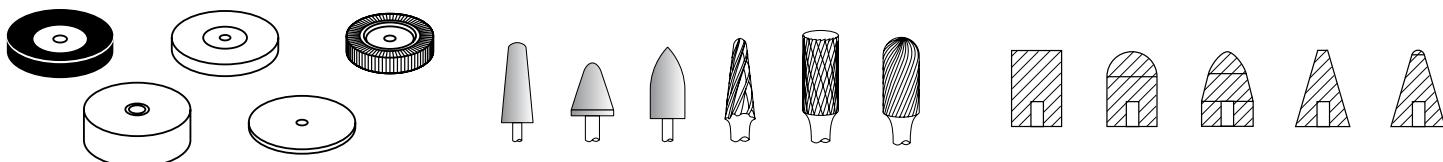

Page Number	Application	Abrasive Type/Size	Model Series	Power Output	Mounting of Abrasives
40		3 Inch (75 mm) to 4 Inch (100 mm) Type 1 Type 1 Cut-off (Type 41) Wheel	400GH 407GH4 507H4	1.2 H.P. (900 W) 1.5 H.P. (1.2 kW)	
41		4 Inch (100 mm), 6 Inch (150 mm) or 8 Inch (200 mm) Type 1 Type 1 Cut-off (Type 41) Wheel	520H 56H 65H	2.0 H.P. (1.5 kW) 3.0 H.P. (2.3 kW) 4.0 H.P. (3.0 kW)	
42		3/8-24 Threaded Cone Wheels	400GH1 507H1	1.2 H.P. (900 W) 1.5 H.P. (1.2 kW)	
43		5/8-11 Threaded Cone Wheels	400GH2 (2 Inch Max. Diameter) 507H2 (2 Inch Max. Diameter) 520HCW	1.2 H.P. (900 W) 1.5 H.P. (1.2 kW) 2.0 H.P. (1.5 kW)	
44		Collet Mounted Abrasives • Burrs • Mounted Stones • Flap Wheels • Cartridge Rolls • Expander Wheels	300EH 300GHD 400GHD 507HD	0.7 H.P. (600 W) 1.2 H.P. (900 W) 1.5 H.P. (1.2 kW)	
45		• Flap Wheels • Sanding Abrasives (5/8" or 1" ID Mount)	300GH(X)M 400GH(X)M 500H1M	0.7 H.P. (600 W) 1.2 H.P. (900 W) 1.5 H.P. (1.2 kW)	
46		• Flap Wheels • Sanding Abrasives (5/8" or 1" ID Mount)	300GH(X)M 400GH(X)M 500H1M	0.7 H.P. (600 W) 1.2 H.P. (900 W) 1.5 H.P. (1.2 kW)	See Model Spread



LEVER STYLE



EXHAUST DIRECTION

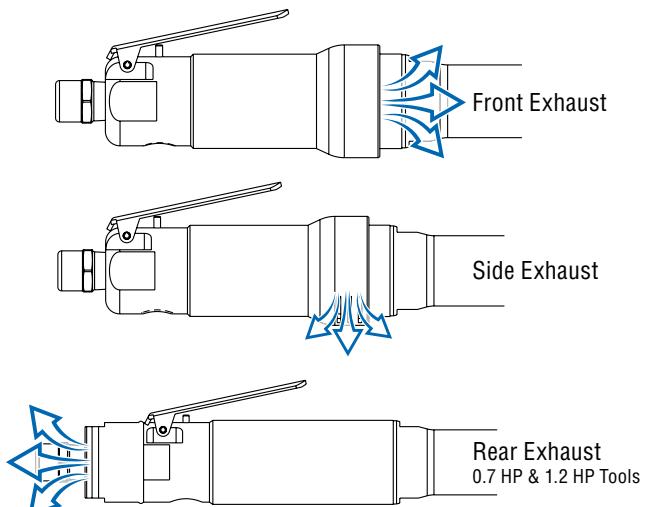

CASE MATERIAL




The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.



THE TOP CAT® COMBINATION ARBOR

The combination arbor allows one to mount several different types to surface conditioning wheels onto our geared (low speed) horizontal sanders/polishers.

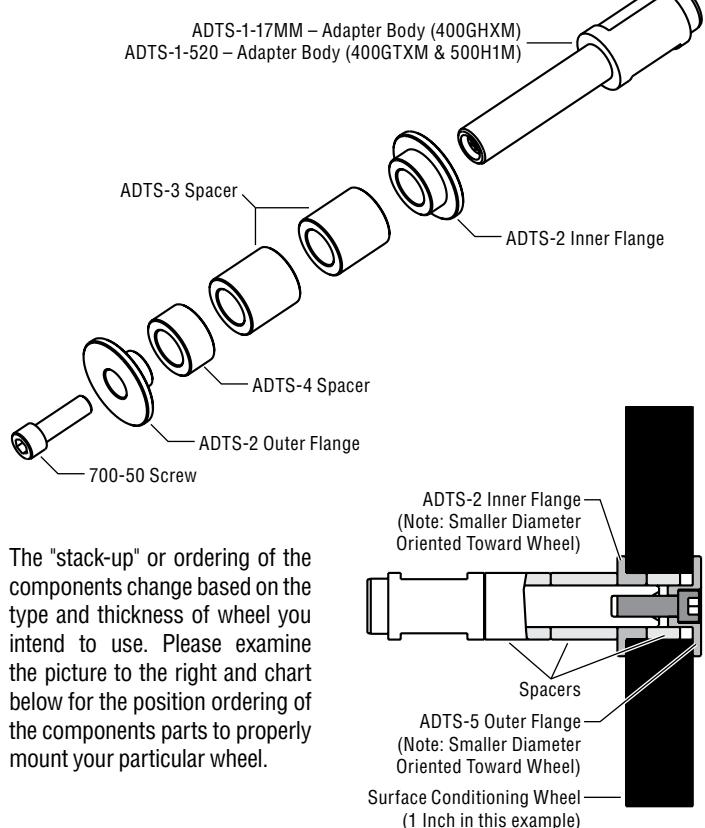

The "stack-up" or ordering of the components change based on the type and thickness of wheel you intend to use. Please examine the picture to the right and chart below for the position ordering of the components parts to properly mount your particular wheel.

POSITION OF MOUNTING ACCESSORY: (A) (B) (C) (D) (E) (F)

(Spacer or Flange Based on Thickness of Wheel)

Wheel Type & Mounting Thickness	Position from Adapter Body					
	(A)	(B)	(C)	(D)	(E)	(F)
1" Thick Flap Wheel w/Recessed Mounting	ADTS-3 (Thick Spacer)	ADTS-3 (Thick Spacer)	ADTS-4 (Thin Spacer)	ADTS-2 (Inner Flange)	Wheel	ADTS-5 (Outer Flange)
1" Thick Surface Conditioning Wheel	ADTS-3 (Thick Spacer)	ADTS-3 (Thick Spacer)	ADTS-2 (Inner Flange)	ADTS-4 (Thin Spacer)		
2" Thick Flap Wheel w/Recessed Mounting	ADTS-3 (Thick Spacer)	ADTS-4 (Thin Spacer)	ADTS-2 (Inner Flange)	ADTS-3 (Thick Spacer)		
2" Thick Surface Conditioning Wheel	ADTS-3 (Thick Spacer)	ADTS-2 (Inner Flange)	ADTS-3 (Thick Spacer)	ADTS-4 (Thin Spacer)		
3" Thick Flap Wheel w/Recessed Mounting	ADTS-4 (Thin Spacer)	ADTS-2 (Inner Flange)	ADTS-3 (Thick Spacer)	ADTS-3 (Thick Spacer)		
3" Thick Surface Conditioning Wheel	ADTS-2 (Inner Flange)	ADTS-3 (Thick Spacer)	ADTS-3 (Thick Spacer)	ADTS-4 (Thin Spacer)		



3 Inch • 4 Inch
(75 mm) (100 mm) 1/2 Inch (13 mm) Max. Wheel Thickness

Horizontal Grinders for 3 Inch & 4 Inch Type 1 Wheels

400GH Series & 407GH Series



400GH4SKR;18000;301




407GH4S;15000;401

507H Series



507HK4;15000;401

Guard/Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER	Guard/Wheel Size	Exhaust Direction	Lever Style	MODEL NUMBER
3 Inch (75 mm)	Side	Standard Lever	400GH4S;18000;301	3 Inch (75 mm)	Side	Standard Lever	507HLS4;18000;301
		Safety Lever	400GH4SK;18000;301			Safety Lever	507HKS4;18000;301
	Rear	Standard Lever	400GH4SR;18000;301	4 Inch (100 mm)	Side	Standard Lever	507HLS4;15000;401
		Safety Lever	400GH4SKR;18000;301			Safety Lever	507HKS4;15000;401
4 Inch (100 mm)	Side	Standard Lever	407GH4S;15000;401				
		Safety Lever	407GH4SK;15000;401				

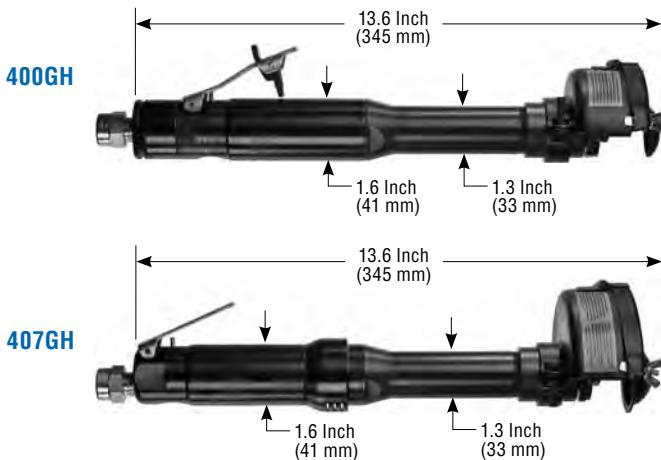

1.2 H.P.
(900 W)




400GH: 35 cfm (16.5 L/s) Max
407GH: 20 cfm (9.4 L/s) Free Speed
35 cfm (16.5 L/s) Max



4.0 Lbs. (1.8 Kg) Aluminum
4.6 Lbs. (2.1 Kg) Steel



3/8" NPT Inlet
1/2" (13 mm) Hose Size

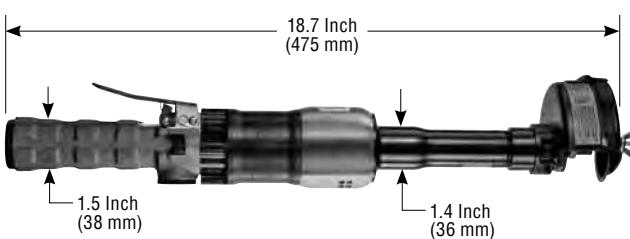

1.5 H.P.
(1.1 kW)



20 cfm (9.4 L/s) Free Speed
35 cfm (16.5 L/s) Max



7.4 Lbs. (3.4 Kg) Steel Only



1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GH & 407GH Series Alternate Options

Lever Style



Case Material



Exhaust Direction



Type 1 Wheel Mounting





4 Inch • 6 Inch • 8 Inch (100 mm) (150 mm) (200 mm) 1 Inch (25 mm) Max. Wheel Thickness

Horizontal Grinders for 6 Inch & 8 Inch Type 1 Wheels

520H Series



520HK;8000;601

56H Series






56HK;6000;601

65H Series



65HG;6000;801

Guard/Wheel Size	Lever Style	MODEL NUMBER	Guard/Wheel Size	Rated Speed	Lever Style	MODEL NUMBER	Guard/Wheel Size	Rated Speed	Lever Style	MODEL NUMBER
4 Inch (100 mm)	Standard Lever	520HL;12000;401								
	Safety Lever	520HK;12000;401								
6 Inch (150 mm)	Standard Lever	520HL;8000;601	6 Inch (150 mm)	8000 RPM	Standard Lever	56HL;8000;601	6 Inch (150 mm)	6000 RPM	Standard Lever	65HL;6000;601
	Safety Lever	520HK;8000;601			Safety Lever	56HK;8000;601			Safety Lever	65HK;6000;601
				6000 RPM	Standard Lever	56HL;6000;801			Standard Lever	65HL;6000;801
					Safety Lever	56HK;6000;801			Safety Lever	65HK;6000;801

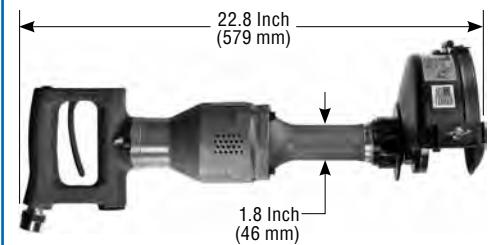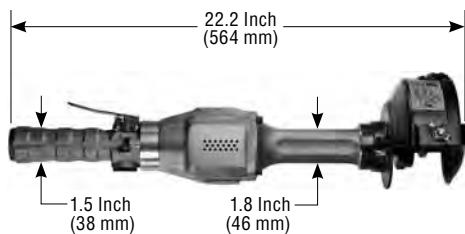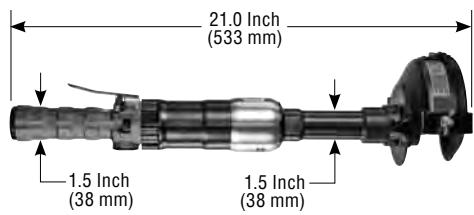

2.0 H.P.
(1.5 kW)



20 cfm (9.4 L/s)
Free Speed
40 cfm (18.9 L/s) Max



10.8 Lbs. (4.9 Kg)
Steel Only



1/2" NPT Inlet
1/2" (13 mm) Hose Size



3.0 H.P.
(2.2 kW)



14.8 Lbs. (6.7 Kg)
Aluminum Only



25 cfm (11.8 L/s)
Free Speed
60 cfm (28.3 L/s) Max



1/2" NPT Inlet
1/2" (13 mm) Hose Size



4.0 H.P.
(3.0 kW)



17.4 Lbs. (7.9 Kg)
Aluminum Only



25 cfm (11.8 L/s)
Free Speed
75 cfm (35.3 L/s) Max



1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

520H, 56H & 65H Series Alternate Options

Handles



Type 1 Wheel Mounting





Horizontal Grinders for 3/8-24 Cone Wheels
400GH Series


507H Series


Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
20000 RPM	Side	Standard Lever	400GH1S;20000
		Safety Lever	400GH1SK;20000
	Rear	Standard Lever	400GH1SR;20000
		Safety Lever	400GH1SKR;20000
18000 RPM	Side	Standard Lever	400GH1S;18000
		Safety Lever	400GH1SK;18000
	Rear	Standard Lever	400GH1SR;18000
		Safety Lever	400GH1SKR;18000

Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
18000 RPM	Side	Standard Lever	507HLS1;18000
		Safety Lever	507HKS1;18000

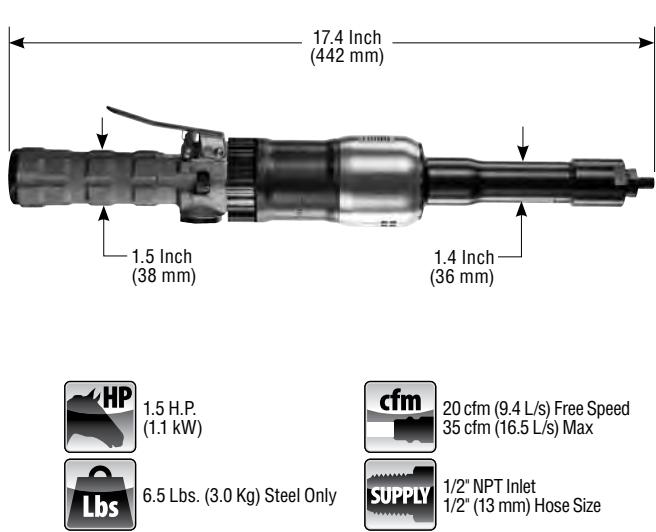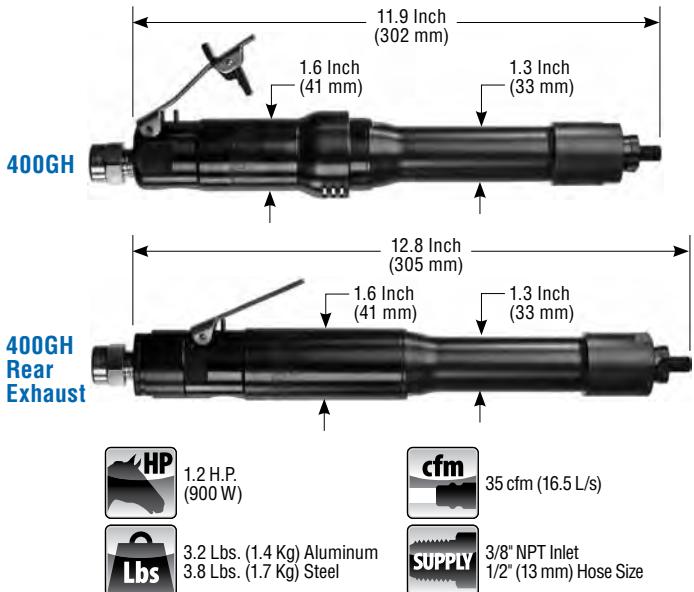
STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

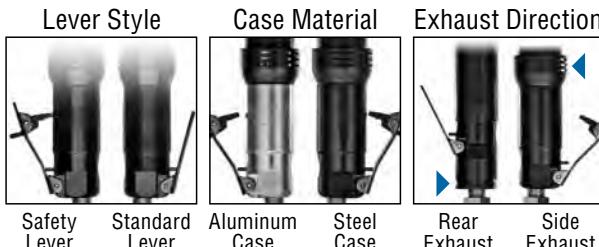
**400GH Series Series
Alternate Options**

Cone Wheel Mounting


Horizontal Grinders for 5/8-11 Cone Wheels


400GH Series

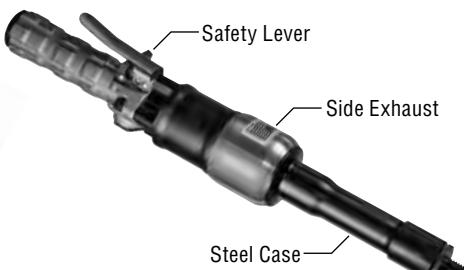




507H Series



520H Series

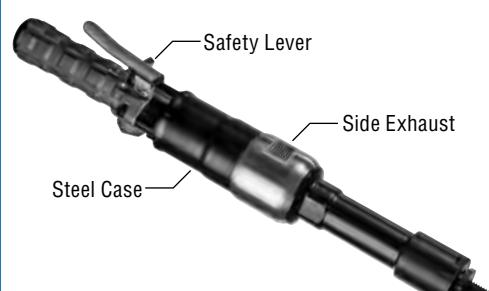

Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER	Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER	Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
20000 RPM	Side	Standard Lever	400GH2S;20000					12000 RPM	Side	Standard Lever	520HLSCW;12000
		Safety Lever	400GH2SK;20000							Safety Lever	520HKSCW;12000
	Rear	Standard Lever	400GH2SR;20000								
		Safety Lever	400GH2SRK;20000								
18000 RPM	Side	Standard Lever	400GH2S;18000	18000 RPM	Side	Standard Lever	507HLS2;18000				
		Safety Lever	400GH2SK;18000	Safety Lever		507HKS2;18000					
	Rear	Standard Lever	400GH2SR;18000								
		Safety Lever	400GH2SRK;18000								

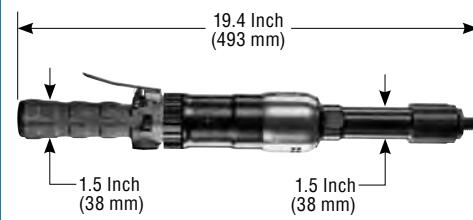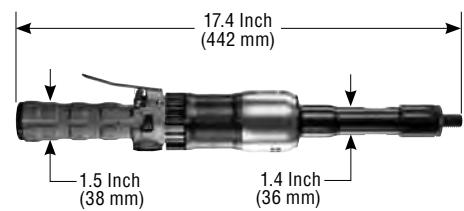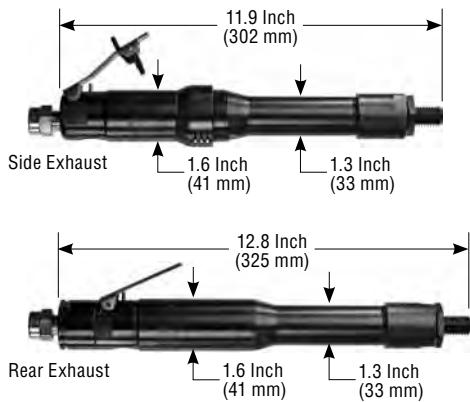

1.2 H.P.
(900 W)



35 cfm
(16.5 L/s)



3.2 Lbs. (1.4 Kg) Aluminum
3.8 Lbs. (1.7 Kg) Steel



3/8" NPT Inlet
1/2" (13 mm)
Hose Size



1.5 H.P.
(1.1 kW)



20 cfm (9.4 L/s) Free Speed
35 cfm (16.5 L/s) Max



2.0 H.P.
(1.5 kW)



20 cfm (9.4 L/s) Free Speed
40 cfm (18.9 L/s) Max



8.4 Lbs. (3.8 Kg)
Steel Only




1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GH Series Alternate Options

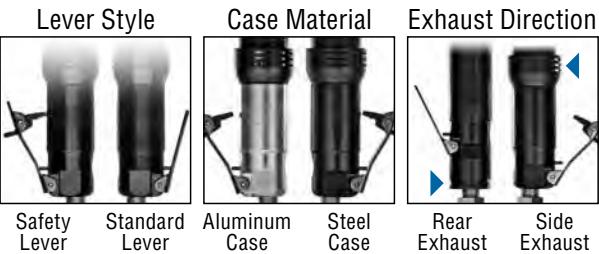


Cone Wheel Mounting



Horizontal Die Grinders (Collet Output)

300EH Series


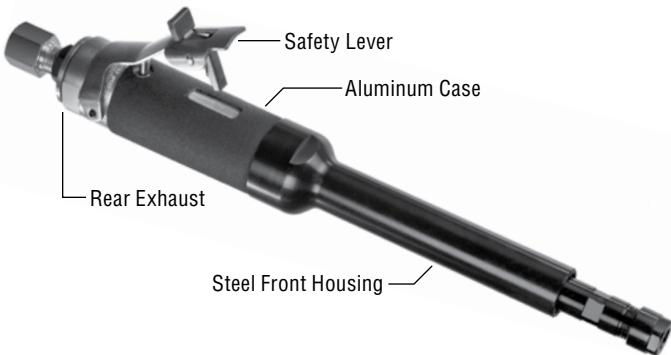

300EHK;25000;1/4

300GH Series


300GHD;25000;1/4

Collet Type/Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
ER Style Insert Collet 1/4 Inch or (7 mm) Maximum	Rear	30000 RPM	Standard Lever	300EH;30000;1/4
			Safety Lever	300EHK;30000;1/4
		25000 RPM	Standard Lever	300EH;25000;1/4
			Safety Lever	300EHK;25000;1/4

Collet Type/Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
1/4 Inch Standard ER Style Insert Collet 3/8 Inch or (10 mm) Maximum	Side	30000 RPM	Standard Lever	300GHD;30000;1/4
			Safety Lever	300GHDK;30000;1/4
			Standard Lever	300GHDR;30000;1/4
			Safety Lever	300GHDKR;30000;1/4
	Rear	25000 RPM	Standard Lever	300GHD;25000;1/4
			Safety Lever	300GHDK;25000;1/4
			Standard Lever	300GHDR;25000;1/4
			Safety Lever	300GHDKR;25000;1/4

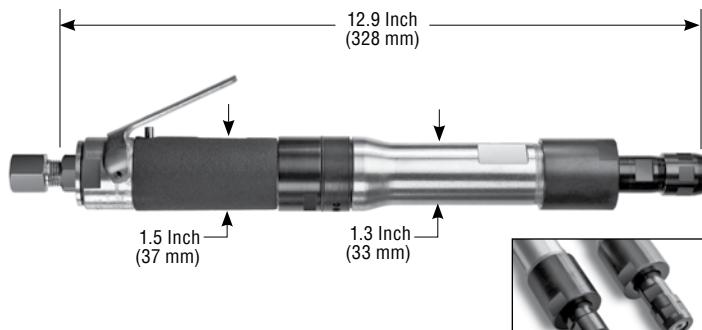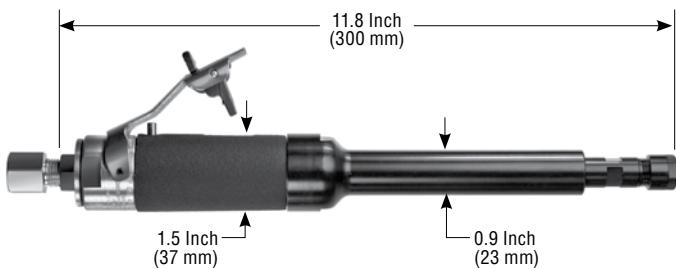
 0.7 H.P.
 (600 W)

 2.0 Lbs. (0.9 Kg) Aluminum
 2.4 Lbs. (1.1 Kg) Steel

 25 cfm
 (11.8 L/s) Max

 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

 0.7 H.P.
 (600 W)

 2.4 Lbs. (1.1 Kg) Aluminum
 2.8 Lbs. (1.3 Kg) Steel

 25 cfm
 (11.8 L/s) Max

 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

 Insert Style or 2 Pcs.
 Collets are available.

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300EH & 300GH Series Alternate Options



Lever Style
 Safety Lever Standard Lever



Case Material
 Aluminum Case Steel Case

Inserted Tool Mounting




Horizontal Die Grinders (Collet Output)



400GH Series


400GHKSD;20000;1/4

507H Series

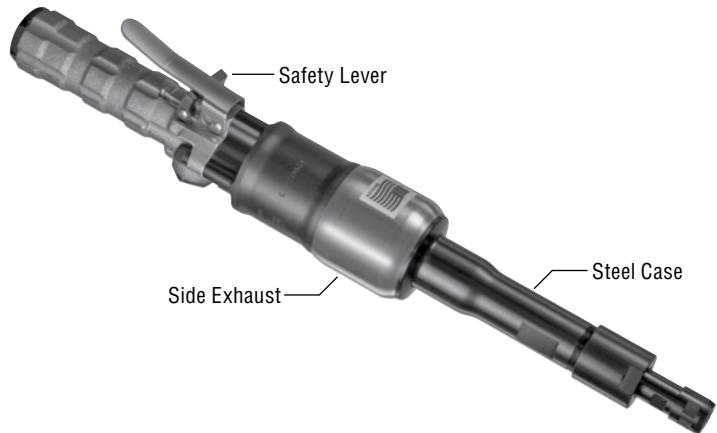
500HKSD;18000;1/4

Collet Type/Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER	Collet Type/Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER	
1/4 Inch Standard ER Style Insert Collet 3/8 Inch or (10mm) Maximum	Side	20000 RPM	Standard Lever	400GHSD;20000;1/4	1/4 Inch Standard 3/8 Inch or (10 mm) Maximum	Side	18000 RPM	Standard Lever	507HLS;18000;1/4	
			Safety Lever	400GHKSD;20000;1/4					507HKSD;18000;1/4CXZ	
	Rear		Standard Lever	400GHSRD;20000;1/4						
			Safety Lever	400GHKSRD;20000;1/4						
	Side	18000 RPM	Standard Lever	400GHSD;18000;1/4		Side	18000 RPM	Safety Lever	507HKSD;18000;1/4CXZ	
			Safety Lever	400GHKSD;18000;1/4						
	Rear		Standard Lever	400GHSRD;18000;1/4						
			Safety Lever	400GHKSRD;18000;1/4						

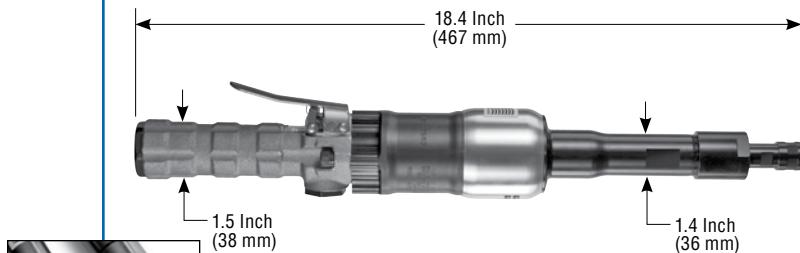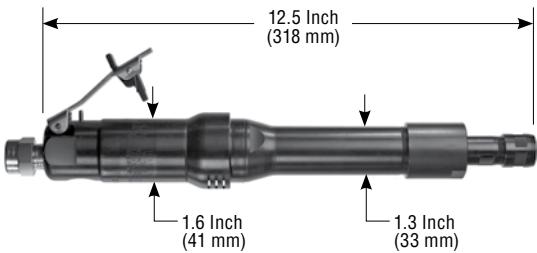
 1.2 H.P.
 (900 W)


35 cfm (16.5 L/s)


 3.2 Lbs. (1.4 Kg) Aluminum
 3.8 Lbs. (1.7 Kg) Steel

 3/8" NPT Inlet
 1/2" (13 mm) Hose Size

 Insert Style or 2 Pcs.
 Collets are available.

 1.5 H.P.
 (1.1 kW)


6.5 Lbs. (3.0 Kg) Steel Only


 35 cfm
 (16.5 L/s) Max

 1/2" NPT Inlet
 1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GH Series Alternate Options

Lever Style




Safety Lever Standard Lever

Case Material



Aluminum Case Steel Case

Exhaust Direction




Rear Exhaust Side Exhaust

Inserted Tool Mounting



Geared Horizontal Polishers/Sanders


300GH(X)M & 400GH(X)M Series

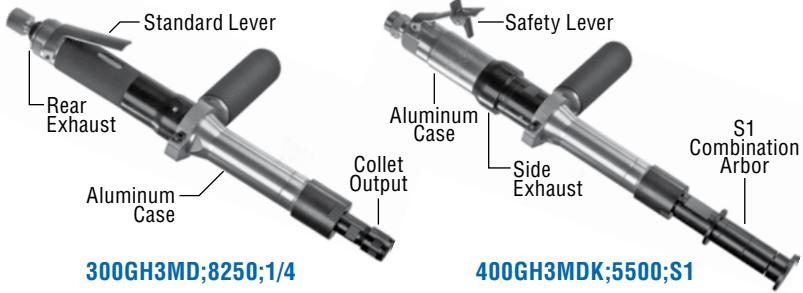

500H1M Series



Output	Gear Ratio/ Max. Rated Speed	Lever Style	300GH(X)M Series	400GH(X)M Series	Output	Gear Ratio/ Max. Rated Speed	Lever Style	MODEL NUMBER
			MODEL NUMBER	MODEL NUMBER				
1/4 Inch Standard ER Style Insert Collet 3/8 Inch (8 mm) Maximum	3:1 (300GH3M 8250 RPM) (400GH3M 5500 RPM)	Standard Lever	300GH3MD;8250;1/4	400GH3MD;5500;1/4	S1 Combination Arbor 1"-4" Wide Surface Conditioning Abrasives	4:1 (4000 RPM)	Standard Lever	500H1ML;4000;S1
	Safety Lever	300GH3MDK;8250;1/4	400GH3MDK;5500;1/4	Safety Lever			500H1MK;4000;S1	
	5:1 (300GH5M 6000 RPM) (400GH5M 4000 RPM)	Standard Lever	300GH5MD;6000;1/4	400GH5MD;4000;1/4				
	Safety Lever	300GH5MDK;6000;1/4	400GH5MDK;4000;1/4					
	8:1 (300GH8M 3750 RPM) (400GH8M 2500 RPM)	Standard Lever	300GH8MD;3750;1/4	400GH8MD;2500;1/4				
	Safety Lever	300GH8MDK;3750;1/4	400GH8MDK;2500;1/4					
S1 Combination Arbor 1"-4" Wide Surface Conditioning Abrasives	3:1 (300GH3M 8250 RPM) (400GH3M 5500 RPM)	Standard Lever	300GH3M;8250;S1	400GH3M;5500;S1	T5/8 Mounting Wheels with a 5/8-11 Thread	4:1 (4000 RPM)	Standard Lever	500H1ML;4000;T5/8
	Safety Lever	300GH3MK;8250;S1	400GH3MK;5500;S1	Safety Lever			500H1MK;4000;T5/8	
	5:1 (300GH5M 6000 RPM) (400GH5M 4000 RPM)	Standard Lever	300GH5M;6000;S1	400GH5M;4000;S1				
	Safety Lever	300GH5MK;6000;S1	400GH5MK;4000;S1					
	8:1 (300GH8M 3750 RPM) (400GH8M 2500 RPM)	Standard Lever	300GH8M;3750;S1	400GH8M;2500;S1				
	Safety Lever	300GH8MK;3750;S1	400GH8MK;2500;S1					
T5/8 Mounting Wheels with a 5/8-11 Thread	3:1 (300GH3M 8250 RPM) (400GH3M 5500 RPM)	Standard Lever	300GH3M;8250;T5/8	400GH3M;5500;T5/8		4:1 (4000 RPM)	Standard Lever	500H1ML;4000;T5/8
	Safety Lever	300GH3MK;8250;T5/8	400GH3MK;5500;T5/8	Safety Lever			500H1MK;4000;T5/8	
	5:1 (300GH5M 6000 RPM) (400GH5M 4000 RPM)	Standard Lever	300GH5M;6000;T5/8	400GH5M;4000;T5/8				
	Safety Lever	300GH5MK;6000;T5/8	400GH5MK;4000;T5/8					
	8:1 (300GH8M 3750 RPM) (400GH8M 2500 RPM)	Standard Lever	300GH8M;3750;T5/8	400GH8M;2500;T5/8				
	Safety Lever	300GH8MK;3750;T5/8	400GH8MK;2500;T5/8					

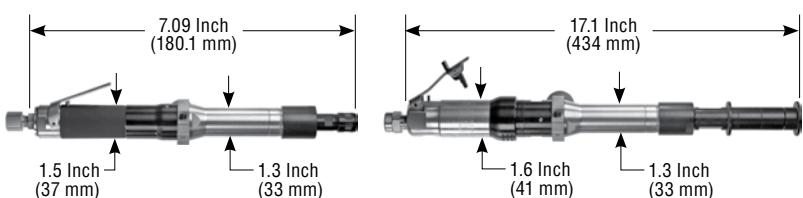

0.7 H.P.
(600 kW)



25 cfm
(11.8 L/s) Max



3.4 Lbs. (1.5 Kg)
Aluminum
3.8 Lbs. (1.7 Kg)
Steel



1/4" NPT Inlet
3/8" (10 mm)
Hose Size



1.2 H.P.
(900 W)




4.7 Lbs. (2.1 Kg)
Aluminum
5.4 Lbs. (2.4 Kg)
Steel



35 cfm
(16.5 L/s) Max



1/2" NPT Inlet
1/2" (13 mm)
Hose Size

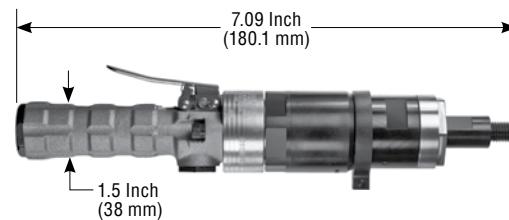

1.5 H.P.
(1.1 kW)



35 cfm
(16.5 L/s) Max



6.7 Lbs. (3.0 Kg)



1/2" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300GH(X)M, 400GH(X)M Series Alternate Options


Lever Style



Case Material



Exhaust Direction



Mounting



HORIZONTAL GRINDERS

Extended Grinders


Page Number	Tool Configuration	Abrasive Size	Model Series	Power Output
50		<ul style="list-style-type: none"> • Cone Wheels (3/8-24) – 2 Inch Max. • Mounted Stones or Burrs 	400EH	
51		<ul style="list-style-type: none"> • Cone Wheels (3/8-24) – 2 Inch Max. • Cone Wheels (5/8-11) – 2 Inch Max. • Mounted Stones or Burrs • 4 Inch Type 1 Wheels 	400GEH 407GEH	1.2 H.P. (900 W)
52			520HGEH	2.0 H.P. (1.5 kW)
53		<ul style="list-style-type: none"> • Cone Wheels (5/8-11) • 6 Inch Type 1 Wheels 	65HGEH	4.0 H.P. (3.0 kW)
54		<ul style="list-style-type: none"> • Cone Wheels (5/8-11) 	65NEH	4.0 H.P. (3.0 kW)

LEVER STYLES FOR 400EH AND 400GEH SERIES TOOLS




MOUNTING OF WHEELS


Proper Mounting of Smaller Type 1 Wheels

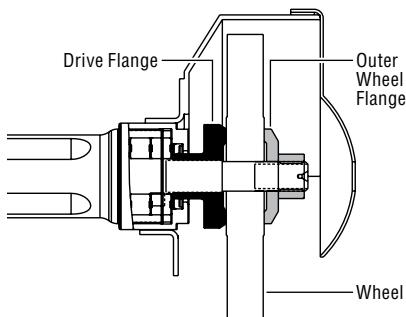


Proper Mounting of Cone Wheels

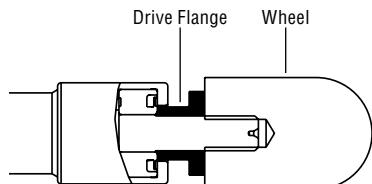

Proper Mounting of Inserted Tooling (Burrs/Mounted Stones)

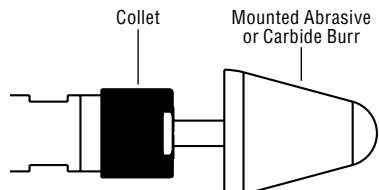

EXHAUST DIRECTION

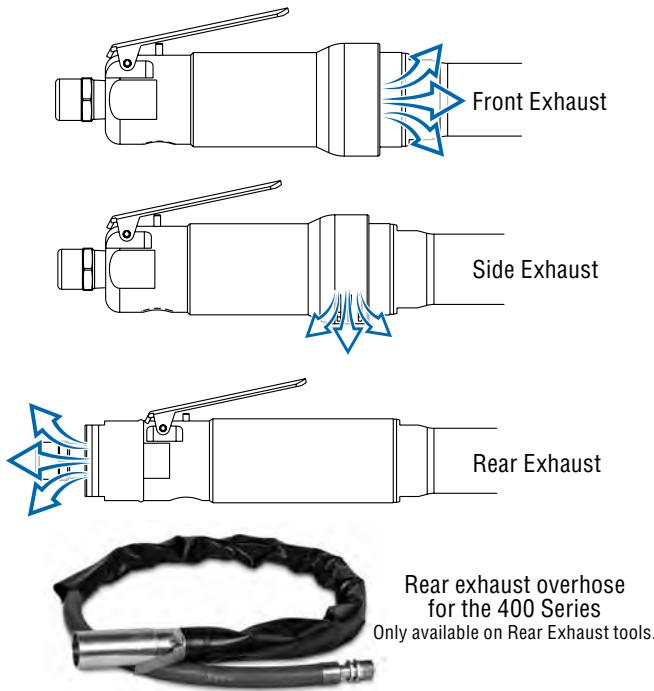

CASE MATERIAL FOR 400EH AND 400GEH SERIES TOOLS




Aluminum Case Material Steel Case Material

The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.

EXTENSION LENGTH

The "+XX" dimension that is designated in the model number is considered the "Operational Extension Length". This dimension is the actual length of the extended housing from the front of the motor forward. The operator should use this dimension as a means to judge the length of necessary extension based on the application. This should not be confused with the "Overall Length" which includes the actual length of the motor and handle.

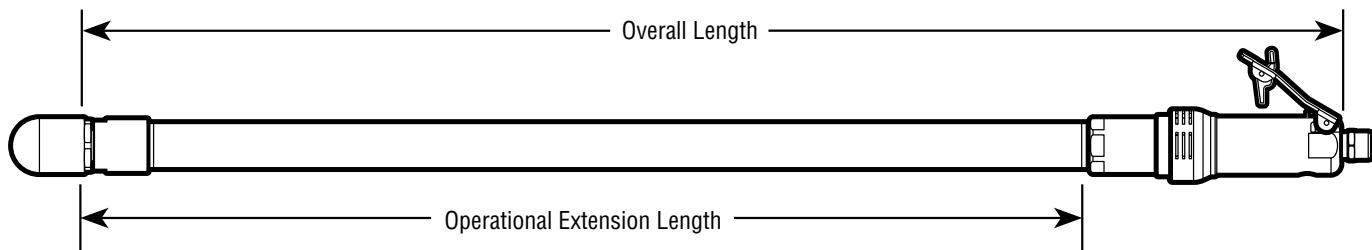

Narrow Neck Extended Grinders


400EH Series



+13 Length Shown - Other Lengths Available

Output	Max. Rated Speed	Lever Style	MODEL NUMBER			
			with 7 Inch Extension	with 13 Inch Extension	with 26 Inch Extension	with 36 Inch Extension
Collet ER Style Insert Collet 3/8 Inch (8mm) Maximum	20,000 RPM	Standard Lever	400EHSD+7;20000;1/4	400EHSD+13;20000;1/4	400EHSD+26;20000;1/4	400EHSD+36;20000;1/4
		Safety Lever	400EHSKD+7;20000;1/4	400EHSKD+13;20000;1/4	400EHSKD+26;20000;1/4	400EHSKD+36;20000;1/4
	18,000 RPM	Standard Lever	400EHSD+7;18000;1/4	400EHSD+13;18000;1/4	400EHSD+26;18000;1/4	400EHSD+36;18000;1/4
		Safety Lever	400EHSKD+7;18000;1/4	400EHSKD+13;18000;1/4	400EHSKD+26;18000;1/4	400EHSKD+36;18000;1/4
Cone Wheel 3/8-24 Cone Wheel Spindle	20,000 RPM	Standard Lever	400EHS1+7;20000	400EHS1+13;20000	400EHS1+26;20000	400EHS1+36;20000
		Safety Lever	400EHSK1+7;20000	400EHSK1+13;20000	400EHSK1+26;20000	400EHSK1+36;20000
	18,000 RPM	Standard Lever	400EHS1+7;18000	400EHS1+13;18000	400EHS1+26;18000	400EHS1+36;18000
		Safety Lever	400EHSK1+7;18000	400EHSK1+13;18000	400EHSK1+26;18000	400EHSK1+36;18000

Other Collet Sizes are Available

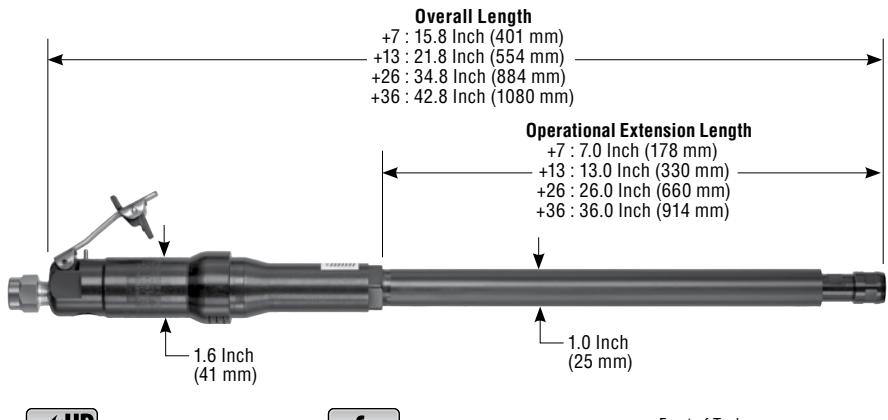
 1.2 H.P.
(900 W)

 +7: 4.8 Lbs. (2.2 Kg)
+13: 6.0 Lbs. (2.7 Kg)
+26: 8.7 Lbs. (3.9 Kg)
+36: 10.7 Lbs. (4.8 Kg)


 35 cfm
(16.5 L/s) Max

 3/8" NPT Inlet
1/2" (13mm) Hose Size

 Front of Tool
Triple Ball Bearings
Output Spindle

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

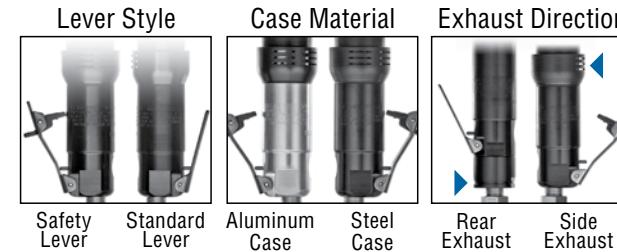 400EH Series
Alternate Options


Abrasive Disk Mounting






Burrs, Mounted Stones, 3/8-24 Cone Wheels,
5/8-11 Cone Wheels (2" Max.) & 4" Type 1 Wheels

Extended Grinders

400GEH & 407GEH Series



Output	Max. Rated Speed	Lever Style	MODEL NUMBER		
			with 15 Inch Extension	with 28 Inch Extension	with 38 Inch Extension
Collet ER Style Insert Collet 3/8 Inch (8mm) Maximum	20,000 RPM	Standard Lever	400GEHSD+15;20000;1/4	400GEHSD+28;20000;1/4	400GEHSD+38;20000;1/4
		Safety Lever	400GEHSDKD+15;20000;1/4	400GEHSDKD+28;20000;1/4	400GEHSDKD+38;20000;1/4
	18,000 RPM	Standard Lever	400GEHSD+15;18000;1/4	400GEHSD+28;18000;1/4	400GEHSD+38;18000;1/4
		Safety Lever	400GEHSDKD+15;18000;1/4	400GEHSDKD+28;18000;1/4	400GEHSDKD+38;18000;1/4
Cone Wheel 3/8-24 Cone Wheel Spindle	20,000 RPM	Standard Lever	400GEHS1+15;20000	400GEHS1+28;20000	400GEHS1+38;20000
		Safety Lever	400GEHSDK1+15;20000	400GEHSDK1+28;20000	400GEHSDK1+38;20000
	18,000 RPM	Standard Lever	400GEHS1+15;18000	400GEHS1+28;18000	400GEHS1+38;18000
		Safety Lever	400GEHSDK1+15;18000	400GEHSDK1+28;18000	400GEHSDK1+38;18000
Cone Wheel 5/8-11 Cone Wheel Spindle	20,000 RPM	Standard Lever	400GEHS2+15;20000	400GEHS2+28;20000	400GEHS2+38;20000
		Safety Lever	400GEHSDK2+15;20000	400GEHSDK2+28;20000	400GEHSDK2+38;20000
	18,000 RPM	Standard Lever	400GEHS2+15;18000	400GEHS2+28;18000	400GEHS2+38;18000
		Safety Lever	400GEHSDK2+15;18000	400GEHSDK2+28;18000	400GEHSDK2+38;18000
4" Type 1 Wheel 3/8-24 Type 1 Wheel	15,000 RPM	Standard Lever	407GEHSD+15;15000;401	407GEHSD+28;15000;401	407GEHSD+38;15000;401
		Safety Lever	407GEHSDK4+15;15000;401	407GEHSDK4+28;15000;401	407GEHSDK4+38;15000;401

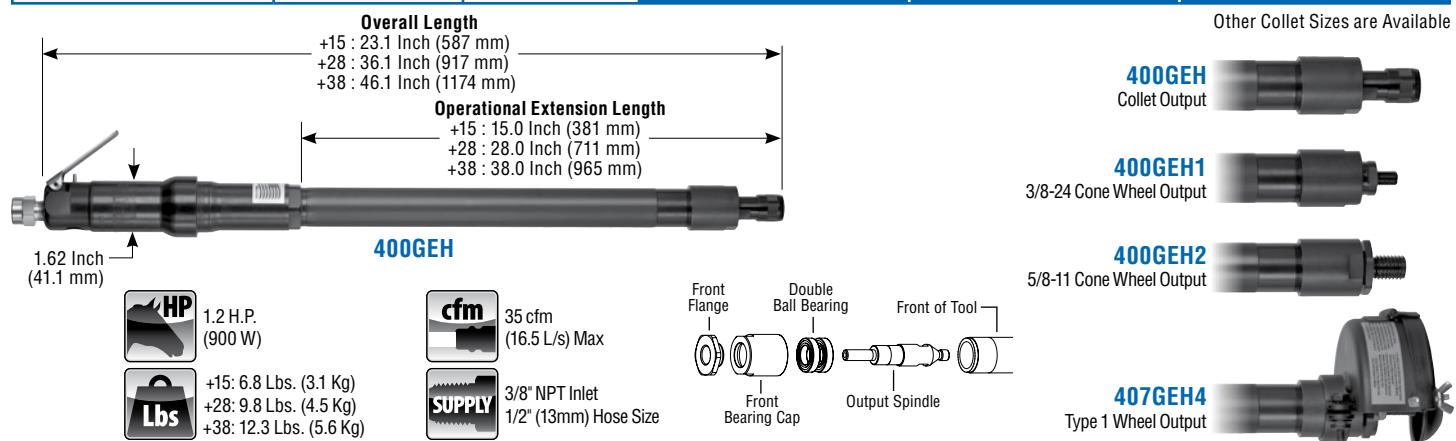

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GEH & 407GEH Series Alternate Options



Abrasive Disk Mounting



WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.

Extended Grinders

520HGEH Series



520HGEHKCW+38;12000

520HGEHK+38;8000;601

Output	Max. Rated Speed	Lever Style	MODEL NUMBER		
			with 15 Inch Extension	with 28 Inch Extension	with 38 Inch Extension
Cone Wheel 5/8-11 Cone Wheel Spindle	12,000 RPM	Standard Lever	520HGEHLCW+15;12000	520HGEHLCW+28;12000	520HGEHLCW+38;12000
		Safety Lever	520HGEHKCW+15;12000	520HGEHKCW+28;12000	520HGEHKCW+38;12000
		Spade Handle	520HGEHGCW+15;12000	520HGEHGCW+28;12000	520HGEHGCW+38;12000
6" Type 1 Wheel 5/8-11 Type 1 Wheel Spindle	8,000 RPM	Standard Lever	520HGEHL+15;8000;601	520HGEHL+28;8000;601	520HGEHL+38;8000;601
		Safety Lever	520HGEHK+15;8000;601	520HGEHK+28;8000;601	520HGEHK+38;8000;601
		Spade Handle	520HGEHG+15;8000;601	520HGEHG+28;8000;601	520HGEHG+38;8000;601


 520HGEHCW
5/8-11 Cone Wheel Output

 520HGEH
Type 1 Wheel Output

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

520HGEH Series Alternate Options



Abrasive Disk Mounting




Extended Grinders

65GGEH Series



Output	Lever Style	with 15 Inch Extension	MODEL NUMBER with 28 Inch Extension	with 38 Inch Extension
Cone Wheel 5/8-11 Cone Wheel Spindle	Standard Lever	65GGEHLCW+15;8000	65GGEHLCW+28;8000	65GGEHLCW+38;8000
	Safety Lever	65GGEHKCW+15;8000	65GGEHKCW+28;8000	65GGEHKCW+38;8000
	Spade Handle	65GGEHGWCW+15;8000	65GGEHGWCW+28;8000	65GGEHGWCW+38;8000
6" Type 1 Wheel 5/8-11 Type 1 Wheel Spindle	Standard Lever	65GGEHL+15;8000;601	65GGEHL+28;8000;601	65GGEHL+38;8000;601
	Safety Lever	65GGEHK+15;8000;601	65GGEHK+28;8000;601	65GGEHK+38;8000;601
	Spade Handle	65GGEHG+15;8000;601	65GGEHG+28;8000;601	65GGEHG+38;8000;601

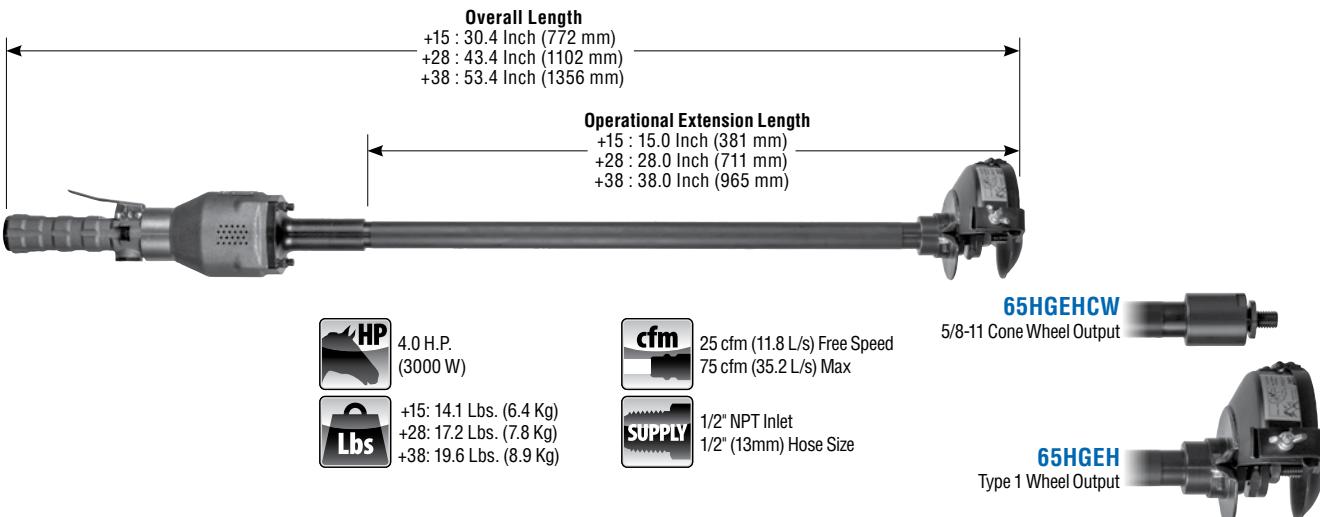

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

65GGEH Series Alternate Options



Abrasive Disk Mounting




Extended Grinders

65NEH Series

Extreme Duty Extended Grinder




Output	Lever Style	with 28 Inch Extension	with 38 Inch Extension
Cone Wheel 5/8-11 Cone Wheel Spindle	Standard Lever	65NEHLCW+28;8000	65NEHLCW+38;8000
	Safety Lever	65NEHKCW+28;8000	65NEHKCW+38;8000
	Spade Handle	65NEHGCW+28;8000	65NEHGCW+38;8000

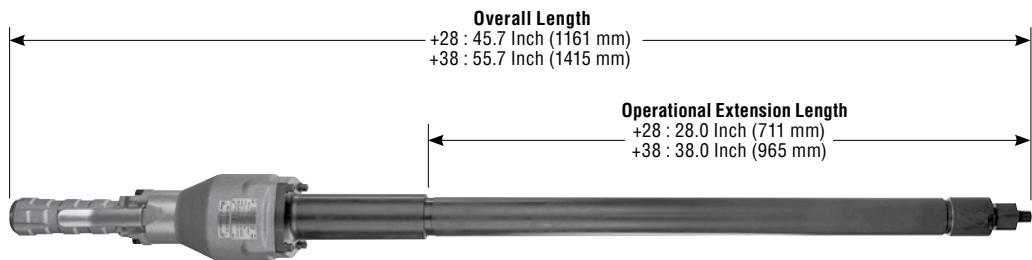4.0 H.P.
(3000 W)+28: 24.3 Lbs (11.0 Kg)
+38: 28.1 Lbs (12.7 Kg)25 cfm (11.8 L/s) Free Speed
75 cfm (35.2 L/s) Max1/2" NPT Inlet
1/2" (13mm) Hose Size

STANDARD EQUIPMENT


- Tool
- Operating Instructions and Service Manual
- Wrench (size based on options)

65NEH Series Alternate Options

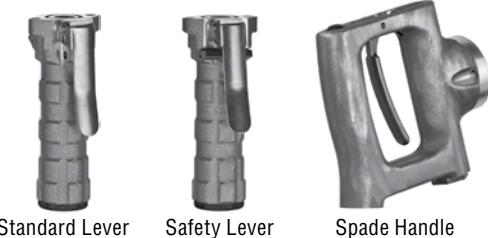


Abrasive Disk Mounting



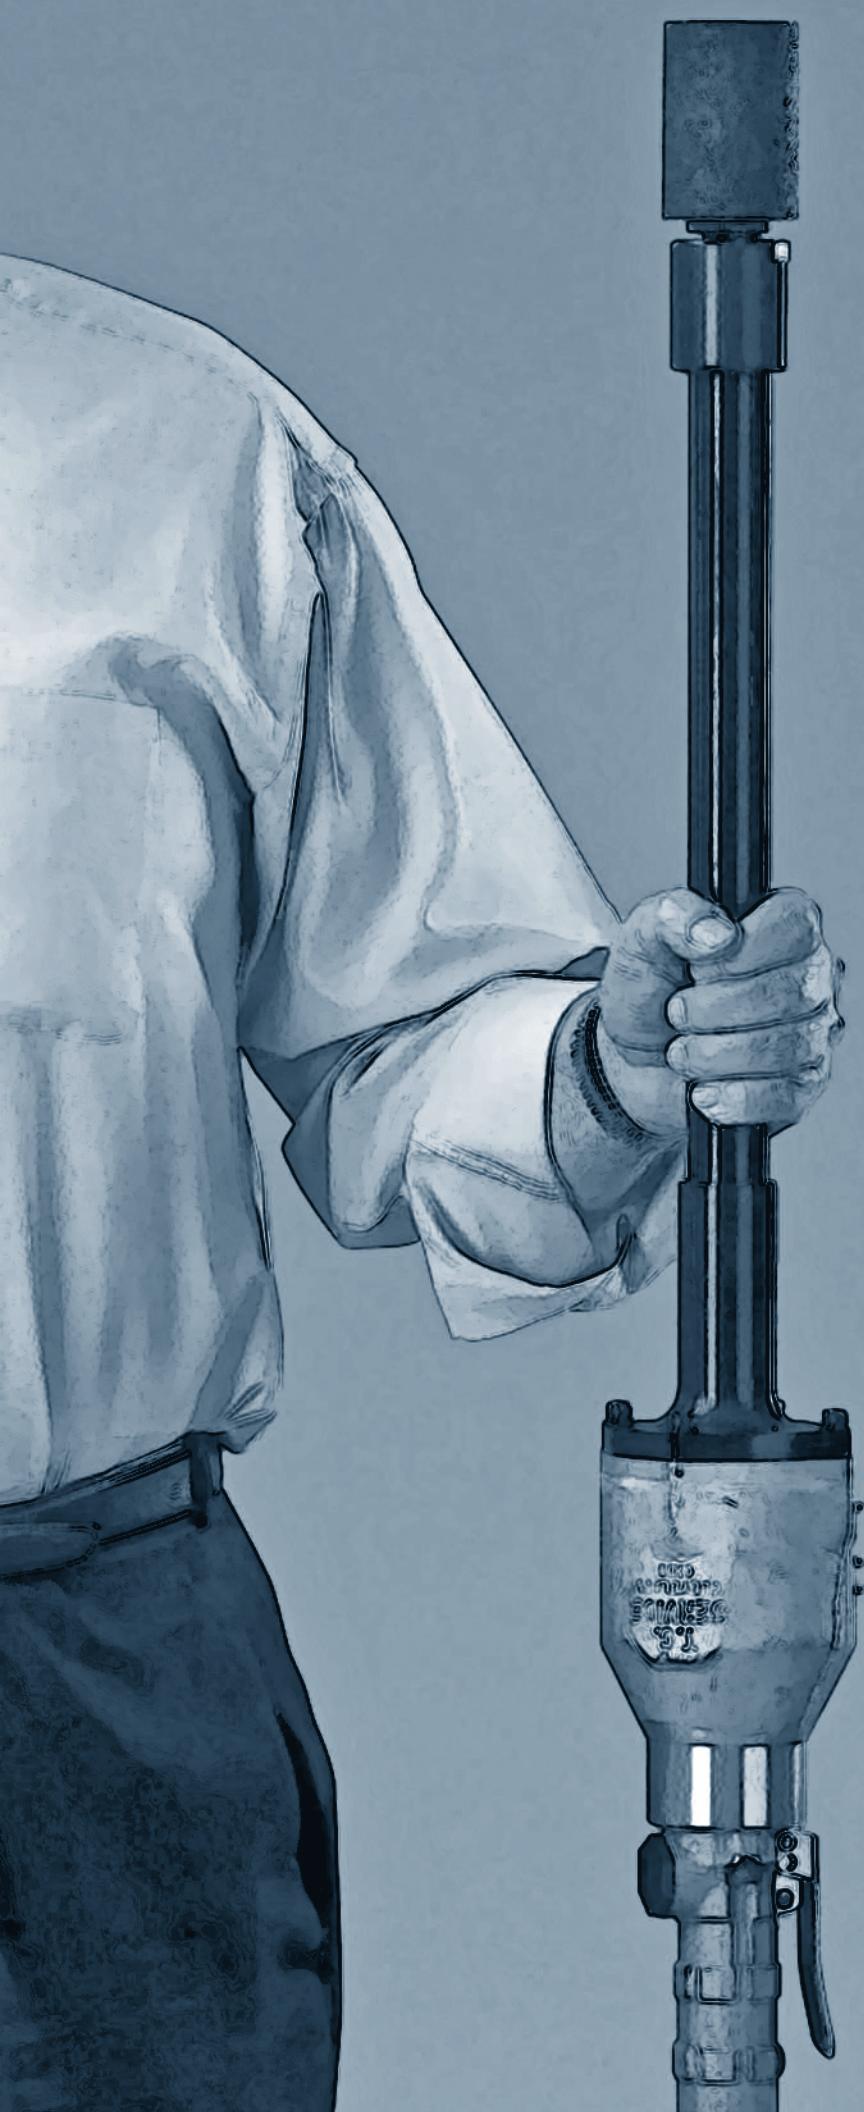

EXTENDED GRINDERS

Page Number	Application	Abrasives Type/Size	Model Series	Power Output	Mounting of Abrasives
58		<ul style="list-style-type: none"> • Carbide Burrs • Mounted Stones • Flap Wheels • Sanding Abrasives w/Shank Mounting 	300GE 307GE 300HGE 307HGE	0.7 H.P. (600 W)	
59		<ul style="list-style-type: none"> • Carbide Burrs • Mounted Stones • Flap Wheels • Sanding Abrasives w/Shank Mounting <p>(3/8" Shank Size Max.)</p>	400GE 400HGE 400GT (collet) 400HGE+3 400HGE+6	1.2 H.P. (900 W)	
60		<ul style="list-style-type: none"> • Type 1 Wheels 	400GT 407GT 400GT+3 400GT+6	1.2 H.P. (900 W)	
61		<ul style="list-style-type: none"> • Cone Wheels 	400GTCW 407GTCW	1.2 H.P. (900 W)	
62		<ul style="list-style-type: none"> • Flap Wheels • Sanding Abrasives w/Shank Mounting <p>(3/8" Shank Size Max.)</p>	300HGE3M 300HGE5M 300HGE8M 400HGE3M 400HGE5M 400HGE8M	0.7 H.P. (600 W) 1.2 H.P. (900 W)	
63		<ul style="list-style-type: none"> • Flap Wheels • Sanding Abrasives <p>(5/8" or 1" ID Mount)</p>	300GT3M 300GT5M 300GT8M 400GT3M 400GT5M 400GT8M	0.7 H.P. (600 W) 1.2 H.P. (900 W)	See Model Page for Abrasive Mounting Details.

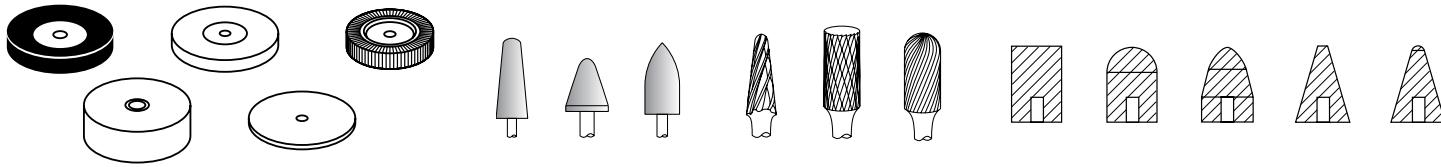

Sanding Abrasives

Mounted Stones

Carbide Burrs


Cone Wheels

LEVER STYLE



Safety Lever Standard Lever

EXHAUST DIRECTION

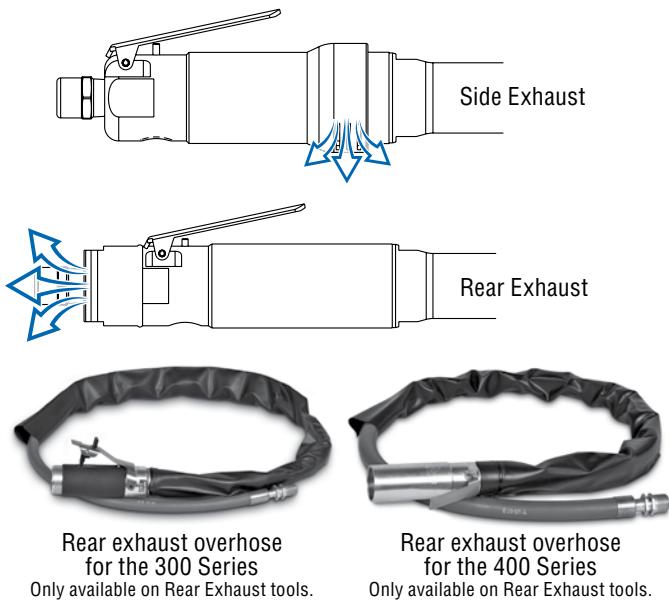

CASE MATERIAL



Aluminum Case Material Steel Case Material

The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.



Die Grinders (Collet Output)


300GE Series & 307GE Series


300GEK;30000;1/4

300HGE Series & 307HGE Series




300HGE;30000;1/4

Collet Type/Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER	Collet Type/Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
ER Style Insert Collet 3/8 Inch (8 mm) Maximum	Rear	30,000 RPM	Standard Lever	300GE;30000;1/4	Double Front Bearing ER Style Insert Collet 3/8 Inch (8 mm) Maximum	Rear	30,000 RPM	Standard Lever	300HGER;30000;1/4
			Safety Lever	300GEK;30000;1/4				Safety Lever	300HGERK;30000;1/4
		25,000 RPM	Standard Lever	300GE;25000;1/4			25,000 RPM	Standard Lever	300HGER;25000;1/4
			Safety Lever	300GEK;25000;1/4				Safety Lever	300HGERK;25000;1/4
		20,000 RPM	Standard Lever	307GE;20000;1/4			20,000 RPM	Standard Lever	307HGER;20000;1/4
			Safety Lever	307GEK;20000;1/4				Safety Lever	307HGERK;20000;1/4
		18,000 RPM	Standard Lever	307GE;18000;1/4			18,000 RPM	Standard Lever	307HGER;18000;1/4
			Safety Lever	307GEK;18000;1/4				Safety Lever	307HGERK;18000;1/4
						Side	30,000 RPM	Standard Lever	300HGE;30000;1/4
								Safety Lever	300HGEK;30000;1/4

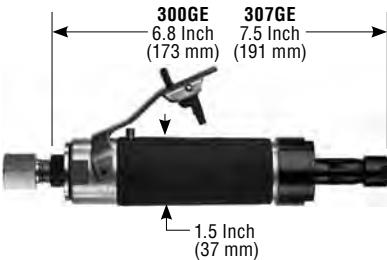
 0.7 H.P.
 (600 W)

 300GE: 25 cfm (11.8 L/s) Max
 307GE: 15 cfm (7.1 L/s) Free Speed
 25 cfm (11.8 L/s) Max

 1.2 Lbs. (0.5 Kg) Aluminum
 1.6 Lbs. (0.7 Kg) Steel

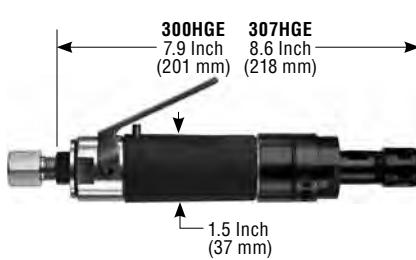 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

 0.7 H.P.
 (600 W)

 300HGE: 25 cfm (11.8 L/s) Max
 307HGE: 15 cfm (7.1 L/s) Free Speed
 25 cfm (11.8 L/s) Max

 1.6 Lbs. (0.7 Kg) Aluminum
 2.0 Lbs. (0.9 Kg) Steel

 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300GE, 307GE, 300HGE & 307HGE Alternate Options


 Safety Lever
 Standard Lever

 Aluminum Case
 Steel Case

The 300GE is available with a front exhaust.

Inserted Tool Mounting



Die Grinders (Collet Output)


400GE Series


400GESK;20000;1/4


400HGE Series



400GT Series

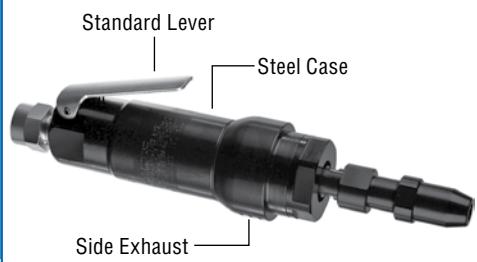
400GTS4;20000;1/4

Collet Type/ Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
ER Style Insert Collet 3/8 Inch (8 mm) Maximum	Side	20,000 RPM	Standard	400GES;20000;1/4
		Safety		400GESK;20000;1/4
	Rear	18,000 RPM	Standard	400GES;18000;1/4
		Safety		400GESK;18000;1/4
		20,000 RPM	Standard	400GESR;20000;1/4
		Safety		400GESRK;20000;1/4


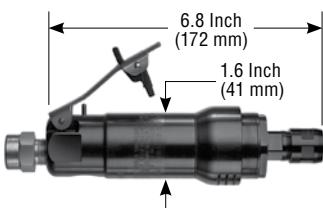

 1.2 H.P.
 (900 W)

 35 cfm
 (16.5 L/s) Max

 1.8 Lbs. (0.8 Kg)
 Aluminum
 2.4 Lbs. (1.1 Kg)
 Steel


 3/8" NPT Inlet
 1/2" (13mm) Hose Size

Collet Type/ Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
Double Front Bearing ER Style Insert Collet 3/8 Inch (8 mm) Maximum	Side	20,000 RPM	Standard	400HGES;20000;1/4
		Safety		400HGESK;20000;1/4
	Rear	18,000 RPM	Standard	400HGES;18000;1/4
		Safety		400HGESK;18000;1/4
		20,000 RPM	Standard	400HGESR;20000;1/4
		Safety		400HESRK;20000;1/4

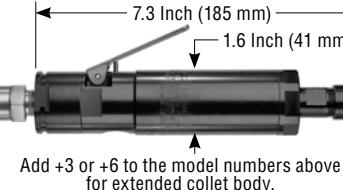

Collet Type/ Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
Bullet Shaped TC-1010 Collet 1/4 Inch Only	Side	20,000 RPM	Standard	400GTS;20000;1/4
		Safety		400GTSK;20000;1/4
	Rear	18,000 RPM	Standard	400GTS;18000;1/4
		Safety		400GTSK;18000;1/4
		20,000 RPM	Standard	400GTSR;20000;1/4
		Safety		400GTSRK;20000;1/4

Collet Type/ Capacity	Exhaust Direction	Max. Rated Speed	Lever Style	MODEL NUMBER
Single Front Bearing	Side	20,000 RPM	Standard	400GTS;20000;1/4
		Safety		400GTSK;20000;1/4
	Rear	18,000 RPM	Standard	400GTS;18000;1/4
		Safety		400GTSK;18000;1/4
		20,000 RPM	Standard	400GTSR;20000;1/4
		Safety		400GTSRK;20000;1/4

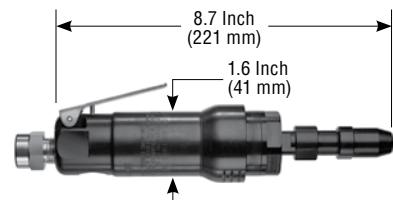
 1.2 H.P.
 (900 W)

 2.0 Lbs. (0.9 Kg)
 Aluminum
 2.6 Lbs. (1.2 Kg)
 Steel

 35 cfm
 (16.5 L/s) Max

 3/8" NPT Inlet
 1/2" (13mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GE, 400GT & 400HGE Alternate Options



Front Exhaust option is available on all 400 Series Die Grinders.

Inserted Tool Mounting




Die Grinders (Type 1, Type 1 Cut-Off, Type 41 Wheels)

400GT / 400GT+3 / 400GT+6 Series



Guard/Wheel Size	Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
3 Inch (75 mm)	18,000 RPM	Side	Standard Lever	400GTS;18000;301
			Safety Lever	400GTSK;18000;301
		Rear	Standard Lever	400GTSR;18000;301
			Safety Lever	400GTSRK;18000;301

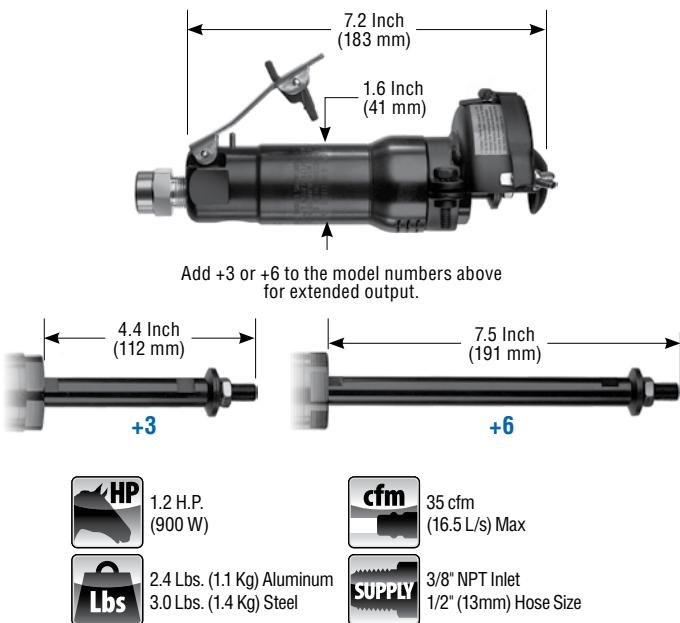

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GT & 407GT Alternate Options



Type 1 Wheel






Die Grinders (3/8-24 Cone Wheels)

400GTCW Series





400GTSKCW;18000

407GTCW Series

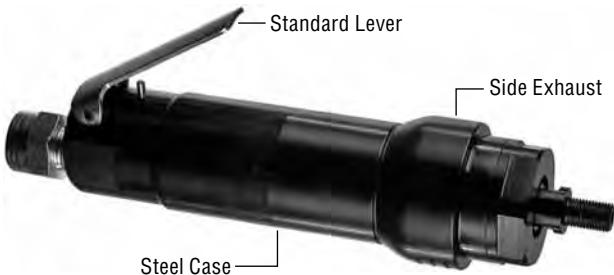

407GTSCW;15000

Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER	Max. Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
18,000 RPM	Side	Standard Lever	400GTSCW;18000	15,000 RPM	Side	Standard Lever	407GTSCW;15000
		Safety Lever	400GTSKCW;18000			Safety Lever	407GTSKCW;15000
	Rear	Standard Lever	400GTSRCW;18000				
		Safety Lever	400GTSRKCW;18000				

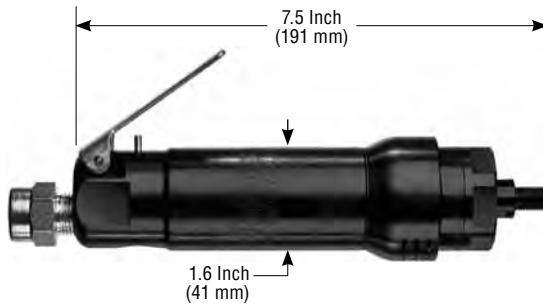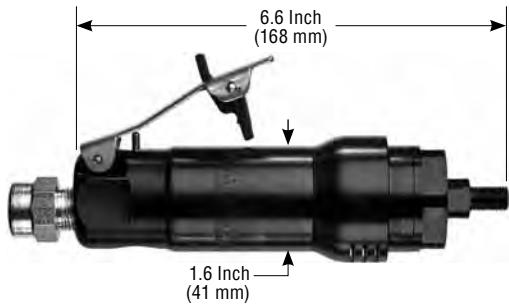

1.2 H.P.
(900 W)



1.9 Lbs. (0.9 Kg) Aluminum
2.5 Lbs. (1.1 Kg) Steel



35 cfm
(16.5 L/s) Max



3/8" NPT Inlet
1/2" (13mm) Hose Size



1.2 H.P.
(900 W)



2.0 Lbs. (0.9 Kg) Aluminum
2.6 Lbs. (1.2 Kg) Steel



35 cfm
(16.5 L/s) Max



3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

400GTCW & 407GTCW Alternate Options



Cone Wheel Mounting



Geared Die Grinders (Collet Output)



300HGE(X)M Series


300HGE3MRK;8250;1/4

400HGE(X)M Series


400HGE3M;5500;1/4

Output	Gear Ratio/Max. Rated Speed	Exhaust Direction	Lever Style	300HGE(X)M Series MODEL NUMBER	400HGE(X)M Series MODEL NUMBER
Double Front Bearing ER Style Insert Collet 3/8 Inch (8 mm) Maximum	3:1 300HGE3M - 8250 RPM 400HGE3M - 5500 RPM	Side Exhaust	Standard Lever		400HGE3M;5500;1/4
			Safety Lever		400HGE3MK;5500;1/4
		Rear Exhaust	Standard Lever	300HGE3MR;8250;1/4	400HGE3MR;5500;1/4
			Safety Lever	300HGE3MRK;8250;1/4	400HGE3MRK;5500;1/4
	5:1 300HGE5M - 6000 RPM 400HGE5M - 4000 RPM	Side Exhaust	Standard Lever		400HGE5M;4000;1/4
			Safety Lever		400HGE5MK;4000;1/4
		Rear Exhaust	Standard Lever	300HGE5MR;6000;1/4	400HGE5MR;4000;1/4
			Safety Lever	300HGE5MRK;6000;1/4	400HGE5MRK;4000;1/4
	8:1 300HGE8M - 3750 RPM 400HGE8M - 2500 RPM	Side Exhaust	Standard Lever		400HGE8M;2500;1/4
			Safety Lever		400HGE8MK;2500;1/4
		Rear Exhaust	Standard Lever	300HGE8MR;3750;1/4	400HGE8MR;2500;1/4
			Safety Lever	300HGE8MRK;3750;1/4	400HGE8MRK;2500;1/4

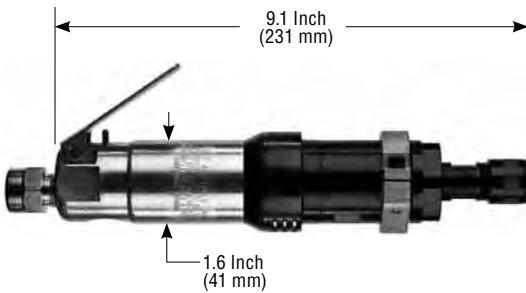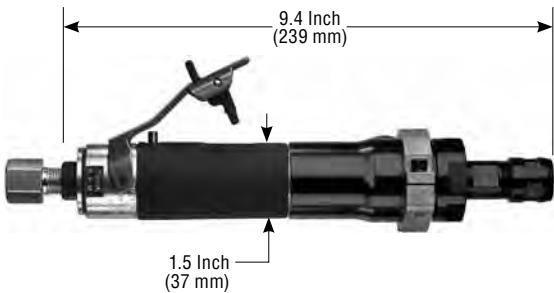
 0.7 H.P.
 (600 W)

 2.4 Lbs. (1.1 Kg)
 3.0 Lbs. (1.4 Kg) Steel

 25 cfm
 (11.8 L/s) Max

 1/4" NPT Inlet
 3/8"(10 mm) Hose Size

 1.2 H.P.
 (900 W)

 3.1 Lbs. (1.4 Kg) Aluminum
 3.7 Lbs. (1.7 Kg) Steel

 35 cfm
 (16.5 L/s) Max


 3/8" NPT Inlet
 1/2" (13mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300HGE(X)M & 400HGE(X)M Alternate Options


 Safety
Lever

 Aluminum
Case

 Case Material
 Exhaust Direction
 Rear Exhaust (400HGE(X)M Only)
 Side Exhaust

Inserted Tool Mounting





Geared Die Grinders for Surface Conditioning Abrasives


300GT(X)M Series



400GT(X)M Series



Output	Gear Ratio/Max. Rated Speed	Exhaust Direction	Lever Style	300GT(X)M Series MODEL NUMBER	400GT(X)M Series MODEL NUMBER
S1 Combination Arbor 1" - 4" Wide Surface Conditioning Abrasives	3:1 300GT3M: 8250 RPM 400GT3M: 5500 RPM	Side Exhaust	Standard Lever		400GT3M;5500;S1
			Safety Lever		400GT3MK;5500;S1
	5:1 300GT5M: 6000 RPM 400GT5M: 4000 RPM	Rear Exhaust	Standard Lever	300GT3MR;8250;S1	400GT3MR;5500;S1
			Safety Lever	300GT3MRK;8250;S1	400GT3MRK;5500;S1
	8:1 300GT8M: 3750 RPM 400GT8M: 2500 RPM	Side Exhaust	Standard Lever		400GT5M;4000;S1
			Safety Lever		400GT5MK;4000;S1
	8:1 300GT8M: 3750 RPM 400GT8M: 2500 RPM	Rear Exhaust	Standard Lever	300GT5MR;6000;S1	400GT5MR;4000;S1
			Safety Lever	300GT5MRK;6000;S1	400GT5MRK;4000;S1
	3:1 300GT3M: 8250 RPM 400GT3M: 5500 RPM	Side Exhaust	Standard Lever		400GT8M;2500;S1
			Safety Lever		400GT8MK;2500;S1
	5:1 300GT5M: 6000 RPM 400GT5M: 4000 RPM	Side Exhaust	Standard Lever	300GT8MR;3750;S1	400GT8MR;2500;S1
			Safety Lever	300GT8MRK;3750;S1	400GT8MRK;2500;S1
	T5/8 Mounting Wheels That Have a 5/8-11 Thread	Side Exhaust	Standard Lever		400GT3M;5500;T5/8
			Safety Lever		400GT3MK;5500;T5/8
	5:1 300GT5M: 6000 RPM 400GT5M: 4000 RPM	Rear Exhaust	Standard Lever	300GT3MR;8250;T5/8	400GT3MR;5500;T5/8
			Safety Lever	300GT3MRK;8250;T5/8	400GT3MRK;5500;T5/8
	8:1 300GT8M: 3750 RPM 400GT8M: 2500 RPM	Side Exhaust	Standard Lever		400GT5M;4000;T5/8
			Safety Lever		400GT5MK;4000;T5/8
	8:1 300GT8M: 3750 RPM 400GT8M: 2500 RPM	Rear Exhaust	Standard Lever	300GT5MR;6000;T5/8	400GT5MR;4000;T5/8
			Safety Lever	300GT5MRK;6000;T5/8	400GT5MRK;4000;T5/8
	3:1 300GT3M: 8250 RPM 400GT3M: 5500 RPM	Side Exhaust	Standard Lever		400GT8M;2500;T5/8
			Safety Lever		400GT8MK;2500;T5/8
	5:1 300GT5M: 6000 RPM 400GT5M: 4000 RPM	Side Exhaust	Standard Lever	300GT8MR;3750;T5/8	400GT8MR;2500;T5/8
			Safety Lever	300GT8MRK;3750;T5/8	400GT8MRK;2500;T5/8

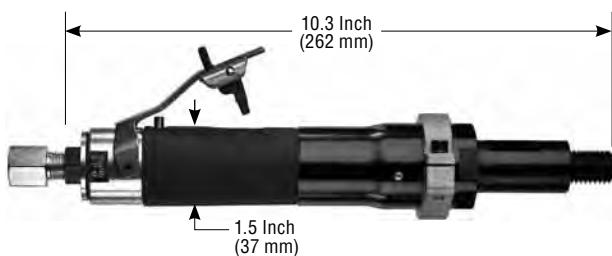

0.7 H.P.
(600 W)




2.8 Lbs. (1.3 Kg) Aluminum
3.5 Lbs. (1.6 Kg) Steel



25 cfm
(11.8 L/s) Max



1/4" NPT Inlet
3/8" (10 mm) Hose Size

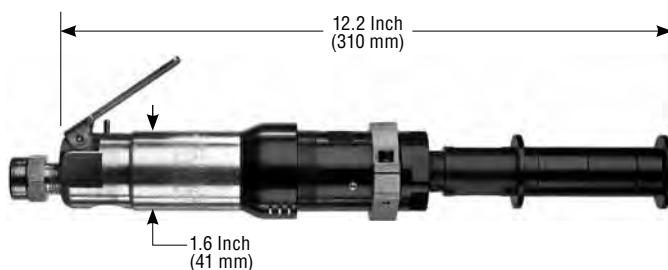

1.2 H.P.
(900 W)



3.9 Lbs (1.8 Kg) Aluminum
4.5 Lbs (2.0 Kg) Steel



35 cfm
(16.5 L/s) Max




3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

300GT(X)M & 400GT(X)M Alternate Options

Lever Style



Safety
Lever

Standard
Lever


Case Material



Aluminum
Case

Steel
Case

Exhaust Direction



Rear
Exhaust
(400GT(X)M Only)

Side
Exhaust



Sanding Abrasive Mounting



Air Drills

Page Number	Model Number	Power	Maximum Operating Speed	Description	
66	300D(X)M 400D(X)M	0.7 HP (600 W) 1.2 HP (900 W)	825-8250 RPM 550-5500 RPM		
67	400D(X)MP	1.2 HP (900 W)	550-5500 RPM	Inline Drills	
	500D2M	1.5 HP (1.1 kW)	1000 RPM		
68	300DRA(X)M 300DRAE(X)M	0.7 HP (600 W)	390-4000 RPM		
	400DRA(X)M 400DRAE(X)M	1.2 HP (900 W)	260-2900 RPM	Right Angle Drills	
69	400FD(X)M	1.2 HP (900 W)	550-5500 RPM		
	500FD1M	1.5 HP (1.1 kW)	4000 RPM	Floor Drills	

EXTENDED NECK VS STANDARD

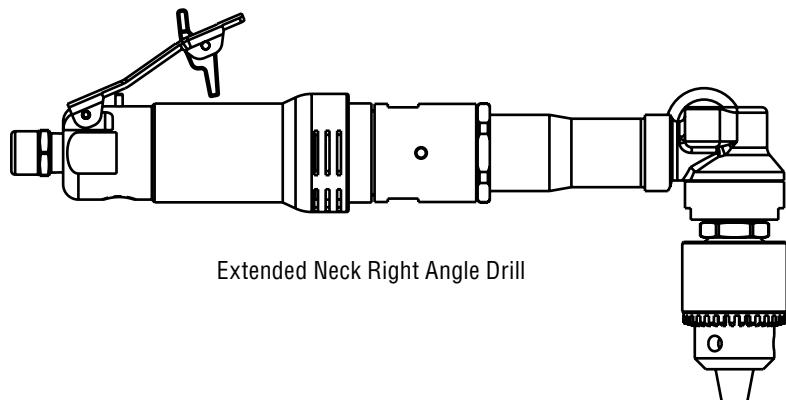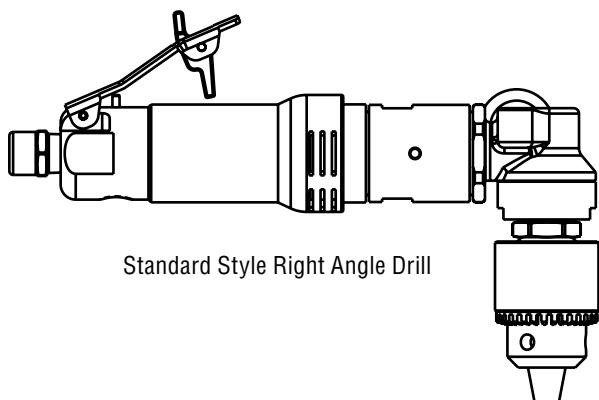

CASE MATERIAL


The choice of case material affects the weight and durability of the tool. By its nature, aluminum is lighter in weight than steel. Steel is more durable in aggressive environments.



LEVER STYLE





EXHAUST DIRECTION

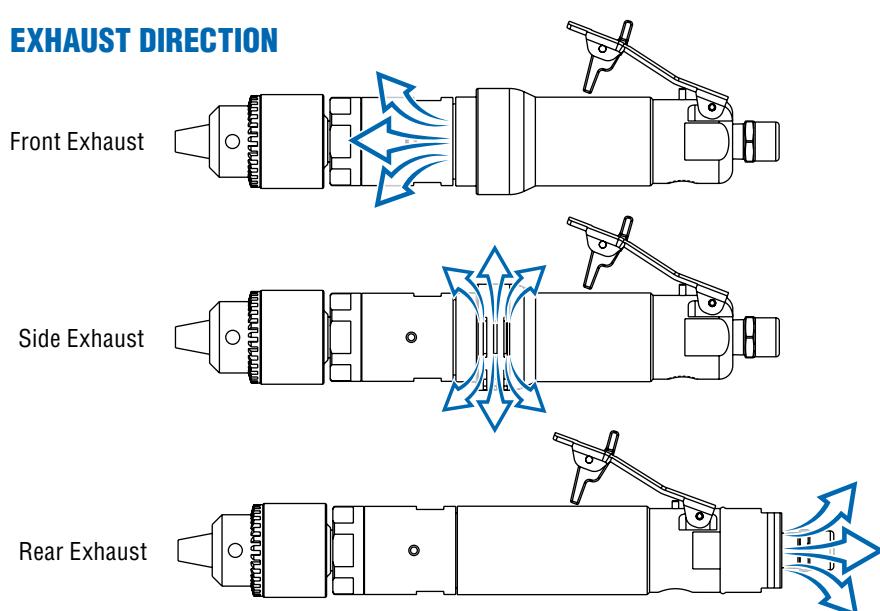


Rear exhaust overhose
for the 300 Series
Only available on Rear Exhaust tools.



Rear exhaust overhose
for the 400 Series
Only available on Rear Exhaust tools.

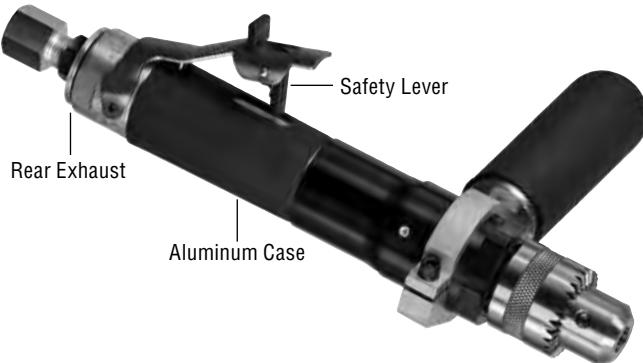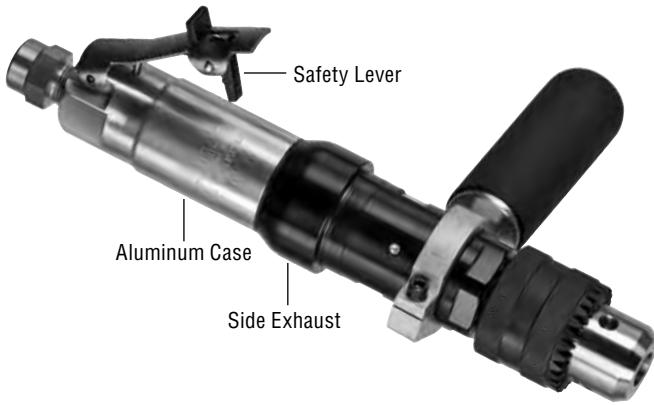Inline Air Drills
300D(X)M Series

300D3MK;8250;D3/8
400D(X)M Series

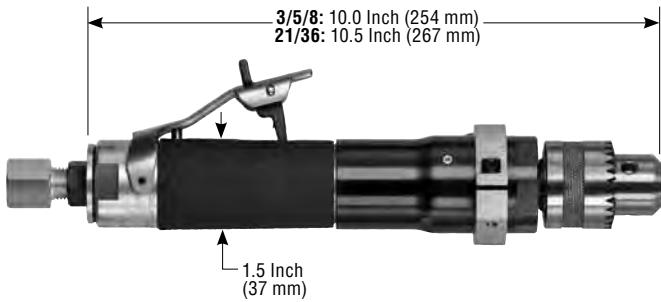400D3MK;5500;D1/2

Output	Gear Ratio/Rated Speed	Lever Style	300 Series MODEL NUMBER	400 Series MODEL NUMBER
300 Series: 3/8" (10 mm) Drill Chuck 400 Series: 1/2" (13 mm) Drill Chuck	3:1 300 Series: 8250 RPM 400 Series: 5500 RPM	Standard Lever	300D3M;8250;D3/8	400D3M;5500;D1/2
	5:1 300 Series: 6000 RPM 400 Series: 4000 RPM	Safety Lever	300D3MK;8250;D3/8	400D3MK;5500;D1/2
	8:1 300 Series: 3750 RPM 400 Series: 2500 RPM	Standard Lever	300D5M;6000;D3/8	400D5M;4000;D1/2
	21:1 300 Series: 1350 RPM 400 Series: 900 RPM	Safety Lever	300D8M;3750;D3/8	400D8M;2500;D1/2
	36:1 300 Series: 825 RPM 400 Series: 550 RPM	Standard Lever	300D21M;1350;D3/8	400D21M;900;D1/2
		Safety Lever	300D21MK;1350;D3/8	400D21MK;900;D1/2
		Standard Lever	300D36M;825;D3/8	400D36M;550;D1/2
		Safety Lever	300D36MK;825;D3/8	400D36MK;550;D1/2


 0.7 H.P.
 (600 kW)

 3/5/8: 3.2 Lbs. (1.4 Kg)
 21/36: 3.4 Lbs (1.5 Kg)

 25 cfm
 (11.8 L/s) Max

 1/4" NPT Inlet
 3/8" (10 mm) Hose Size

 1.2 H.P.
 (900 W)

 3/5/8: 4.1 Lbs. (1.9 Kg)
 21/36: 4.3 Lbs (1.9 Kg)

 35 cfm
 (16.5 L/s) Max

 3/8" NPT Inlet
 1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual

300D(X)M & 400D(X)M Series Alternate Options

 Aluminum Case
 Steel Case

 Safety Lever
 Regular Lever

Pistol Grip Air Drills



400D(X)MP Series


400D3MP;5500;D1/2

500D2M Series


500D2M;1000;D3/4

Output	Gear Ratio / Rated Speed	MODEL NUMBER	Output	Gear Ratio / Rated Speed	MODEL NUMBER
1/2" (13 mm) Drill Chuck	3:1 / 5500 RPM	400D3MP;5500;D1/2	1/2" (13 mm) Drill Chuck	16:1 / 1000 RPM	500D2M;1000;D1/2
	5:1 / 4000 RPM	400D5MP;4000;D1/2	3/4" (19 mm) Drill Chuck		500D2M;1000;D3/4
	8:1 / 2500 RPM	400D8MP;2500;D1/2			
	21:1 / 900 RPM	400D21MP;900;D1/2			
	36:1 / 550 RPM	400D36MP;550;D1/2			

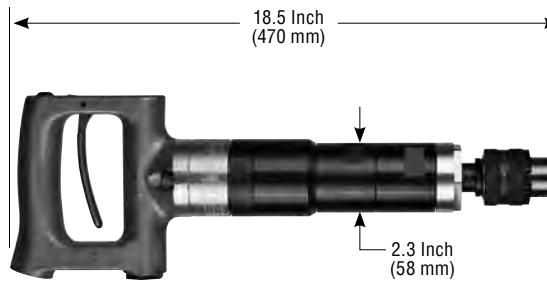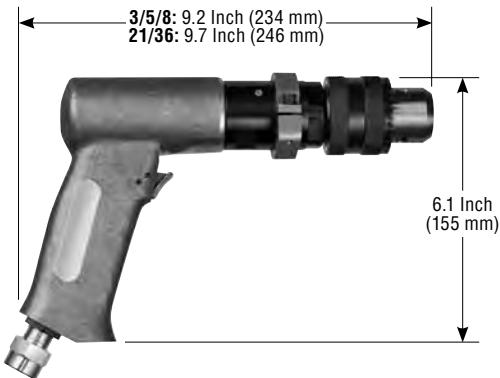
1.2 H.P.
(900 W)

3/5/8: 4.4 Lbs. (2.0 Kg)
21/36: 4.6 Lbs (2.1 Kg)

35 cfm
(16.5 L/s) Max

3/8" NPT Inlet
1/2" (13mm) Hose Size

1.5 H.P.
(1125 W)


11.0 Lbs. (5.0 Kg)


35 cfm
(16.5 L/s) Max

1/2" NPT Inlet
1/2" (13mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual

Right Angle Drills



300DRA(X)M & 300DRAE(X)M Series


300DRA3MK;4000;D3/8
300DRAE3MK;4000;D3/8

400DRA(X)M & 400DRAE(X)M Series


400DRA3MK;2900;D1/2
400DRAE3MR;2900;D1/2

Output	Gear Ratio/Rated Speed	Lever Style	300DRA(X)M MODEL NUMBER	300DRAE(X)M MODEL NUMBER	400DRA(X)M MODEL NUMBER	400DRAE(X)M MODEL NUMBER
300 Series 3/8" (10 mm) Drill Chuck	3:1 300 Series: 4000 RPM	Standard Lever	300DRA3M;4000;D3/8	300DRAE3M;4000;D3/8	400DRA3M;2900;D1/2	400DRAE3M;2900;D1/2
	400 Series: 2900 RPM	Safety Lever	300DRA3MK;4000;D3/8	300DRAE3MK;4000;D3/8	400DRA3MK;2900;D1/2	400DRAE3MK;2900;D1/2
	5:1 300 Series: 3000 RPM	Standard Lever	300DRA5M;3000;D3/8	300DRAE5M;3000;D3/8	400DRA5M;2200;D1/2	400DRAE5M;2200;D1/2
	400 Series: 2200 RPM	Safety Lever	300DRA5MK;3000;D3/8	300DRAE5MK;3000;D3/8	400DRA5MK;2200;D1/2	400DRAE5MK;2200;D1/2
	8:1 300 Series: 1800 RPM	Standard Lever	300DRA8M;1800;D3/8	300DRAE8M;1800;D3/8	400DRA8M;1300;D1/2	400DRAE8M;1300;D1/2
	400 Series: 1300 RPM	Safety Lever	300DRA8MK;1800;D3/8	300DRAE8MK;1800;D3/8	400DRA8MK;1300;D1/2	400DRAE8MK;1300;D1/2
	21:1 300 Series: 660 RPM	Standard Lever	300DRA21M;660;D3/8	300DRAE21M;660;D3/8	400DRA21M;440;D1/2	400DRAE21M;440;D1/2
	400 Series: 440 RPM	Safety Lever	300DRA21MK;660;D3/8	300DRAE21MK;660;D3/8	400DRA21MK;440;D1/2	400DRAE21MK;440;D1/2
	36:1 300 Series: 390 RPM	Standard Lever	300DRA36M;390;D3/8	300DRAE36M;390;D3/8	400DRA36M;260;D1/2	400DRAE36M;260;D1/2
	400 Series: 260 RPM	Safety Lever	300DRA36MK;390;D3/8	300DRAE36MK;390;D3/8	400DRA36MK;260;D1/2	400DRAE36MK;260;D1/2

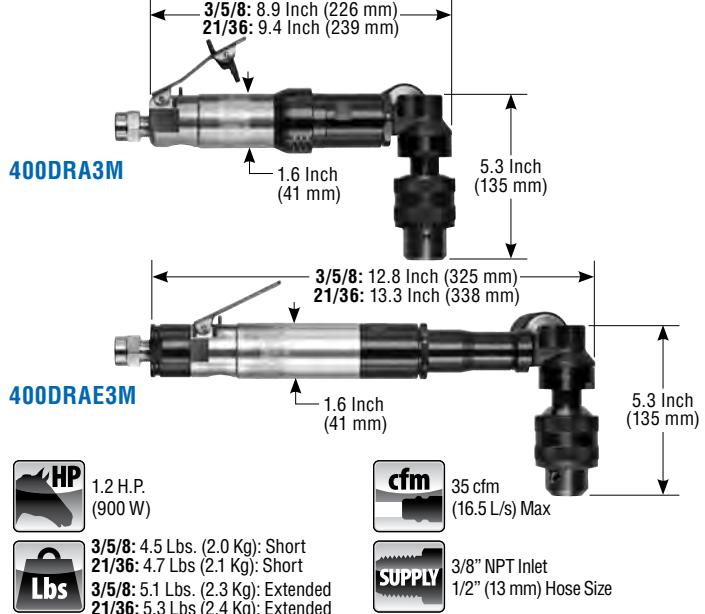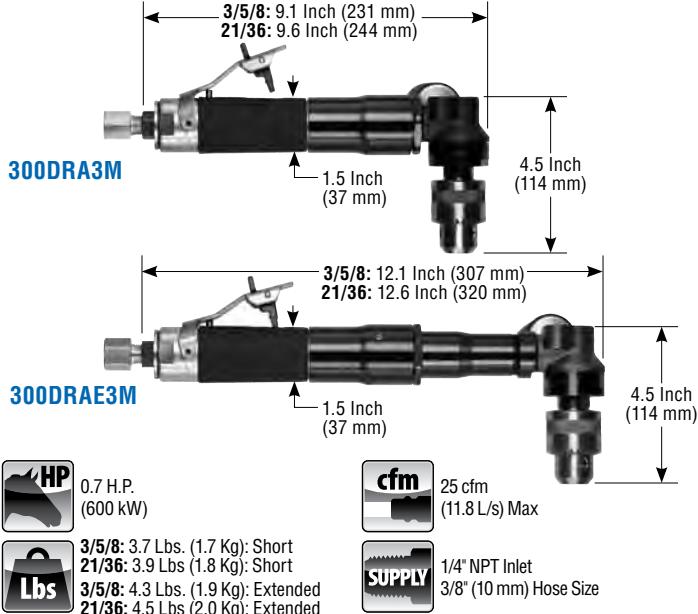

STANDARD EQUIPMENT


- Tool
- Operating Instructions and Service Manual

300DRA(X)M, 300DRAE(X)M, 400DRA(X)M, 400DRAE(X)M Series Alternate Options

Case Material




Lever Style




Floor Drills

400FD(X)M Series

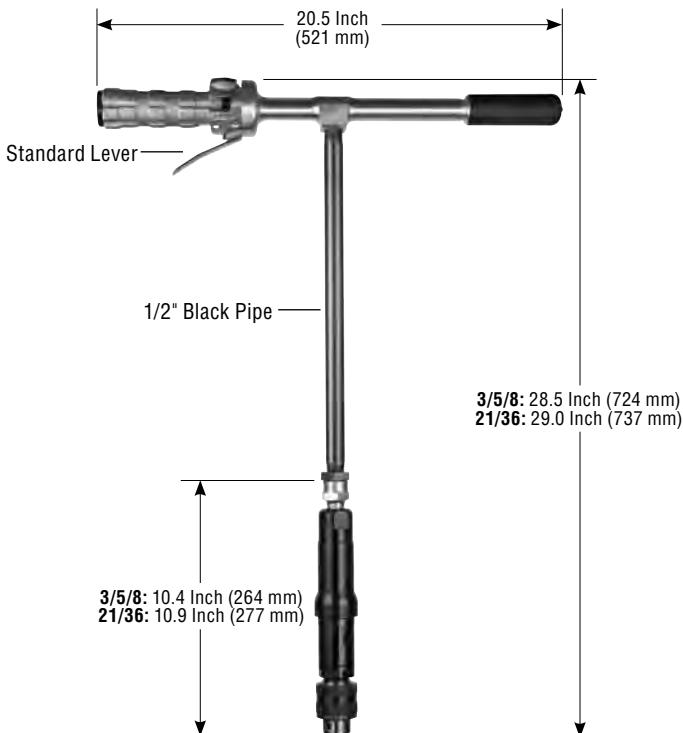
400FD3ML;5500;D1/2;P15

500FD1M Series

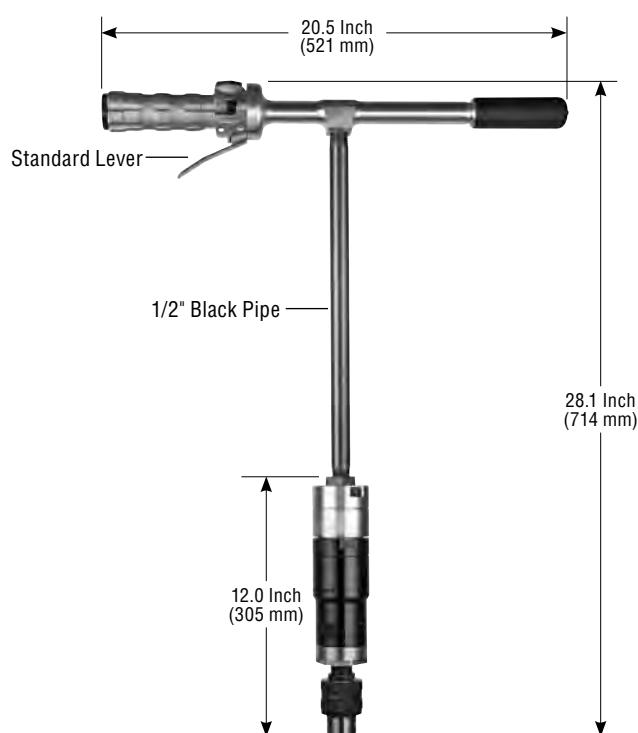
500FD1ML;4000;D1/2;P15

Output	Gear Ratio / Rated Speed	Lever Style	MODEL NUMBER	Output	Gear Ratio / Rated Speed	MODEL NUMBER
1/2" (13 mm) Drill Chuck	3:1 / 5500 RPM	Standard Lever	400FD3M;5500;D1/2;P15	1/2" (13 mm) Drill Chuck	4:1 / 4000 RPM	500FD1ML;4000;D1/2;P15
		Safety Lever	400FD3MK;5500;D1/2;P15			
	5:1 / 4000 RPM	Standard Lever	400FD5M;4000;D1/2;P15			
		Safety Lever	400FD5MK;4000;D1/2;P15			
	8:1 / 2500 RPM	Standard Lever	400FD8M;2500;D1/2;P15			
		Safety Lever	400FD8MK;2500;D1/2;P15			
	21:1 / 900 RPM	Standard Lever	400FD21M;900;D1/2;P15			
		Safety Lever	400FD21MK;900;D1/2;P15			
	36:1 / 550 RPM	Standard Lever	400FD36M;550;D1/2;P15			
		Safety Lever	400FD36MK;550;D1/2;P15			


1.2 H.P.
(900 W)

3/8: 8.3 Lbs. (3.8 Kg)
21/36: 8.5 Lbs (3.8 Kg)

35 cfm
(16.5 L/s) Max

1/2" NPT Inlet
3/8" (10mm) Hose Size

1.5 H.P.
(1125 W)


10.8 Lbs (4.9 Kg)


35 cfm
(16.5 L/s) Max

1/2" NPT Inlet
1/2" (13mm) Hose Size


STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual




Belt Sander

300BL/K

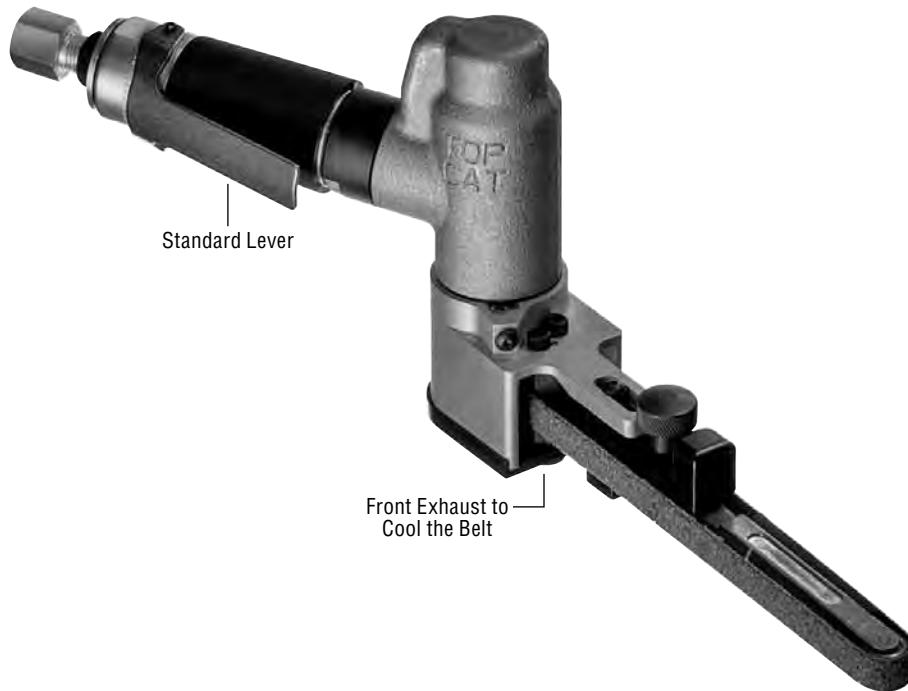

Belt Capacity	Max. SFPM	Lever Style	Model Number
5/8 or 3/4 Inch X 18 Inch	5700 SFPM	Standard Lever	300BL
		Safety Lever	300BK

The 300B Series is offered in a version with a 4550 Max SFPM.

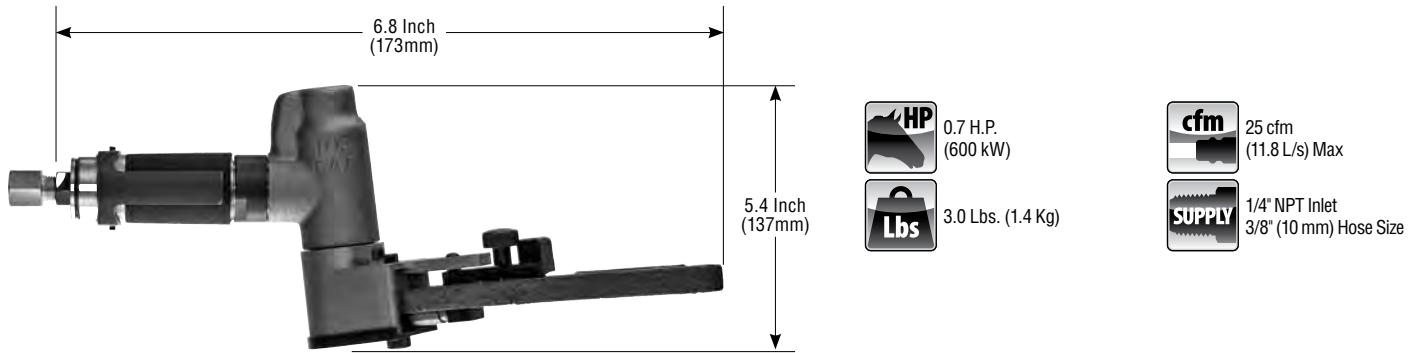

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)



Bench Grinder

66BVG




Adjustable Spark Arrestor

Adjustable Work Rest

MODEL NUMBER

66BVG;6000;9

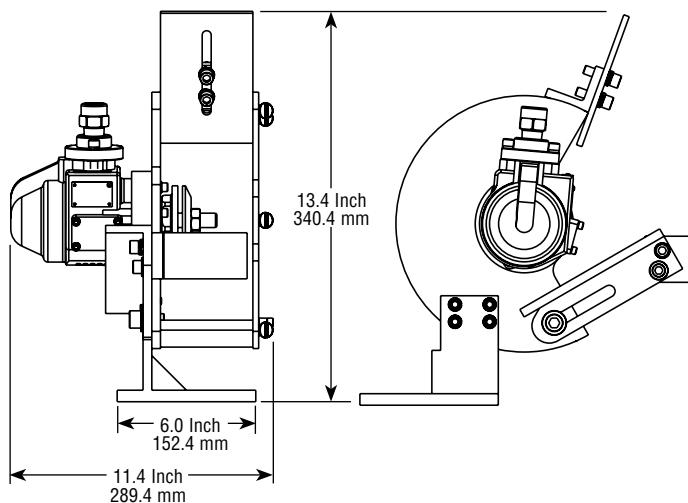

4.0 H.P.
(3000 W)



51.0 Lbs (23.0 Kg)



25 cfm (11.8 L/s) Free
75 cfm (35.4 L/s) Max




1/2" NPT Inlet
1/2" (13mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

Abrasive Cutting Tools


Reinforced Type 1 Cut-Off Wheel (Type 41)



Diamond Wheel




65VBW;5000;12

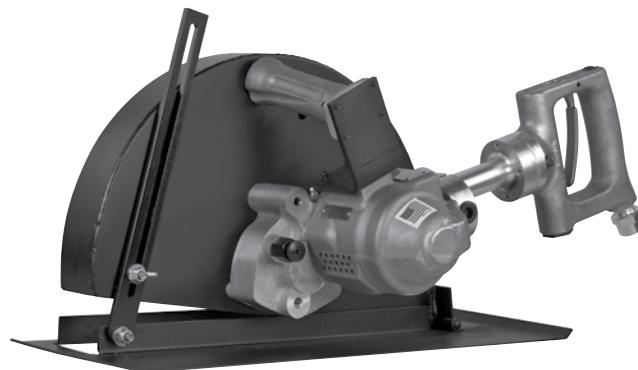


662VBW;3300;14

Guard Size	Spindle Type	Operating Speed	MODEL NUMBER	Guard Size	Spindle Type	Operating Speed	MODEL NUMBER
9 Inch	5/8-11 1" Spline	6000 RPM	65VBW;6000;941	12 Inch	1" Spline	3300 RPM	662VBW;3300;1241
12 Inch		5000 RPM	65VBW;5000;1241				
14 Inch		4000 RPM	65VBW;4000;1441	14 Inch			662VBW;3300;1441

Dimensions shown are for 12" guard. Other guards vary slightly.

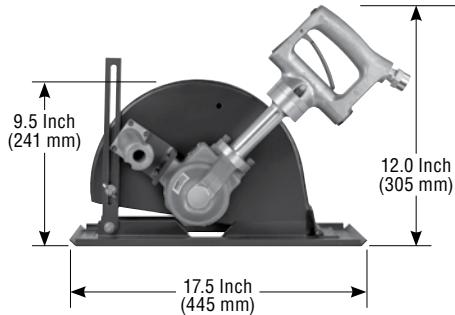

Dimensions shown are for 14" guard. Other guards vary slightly.

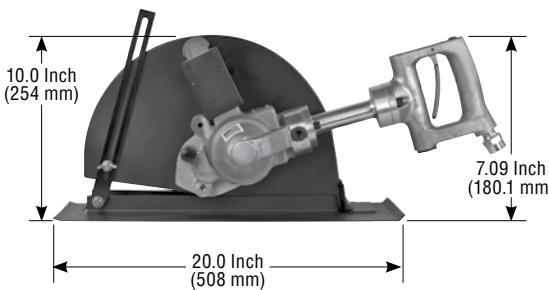

4.0 H.P.
(3000 W)



65VBW: 23.9 Lbs. (10.8 Kg)
662VBW: 28.3 Lbs. (12.8 Kg)



25 cfm (11.8 L/s) Free
75 cfm (35.4 L/s) Max



1/2" NPT Inlet
1/2" (13mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

Model Number	Depth of Cut		
	Guard Size	9 Inch (230mm)	12 Inch (300mm)
65VBW	3.3 Inch (84mm)	2.5 Inch (64mm)	4.3 Inch (109mm)
662VBW	N/A		



Wet Cutting Attachment



Scalers & Needle Scalers

SCALERS Page Number	Tool Configuration	Model Series
75	<ul style="list-style-type: none"> • 1/2 Square Style Chisel 	TC-1
	<ul style="list-style-type: none"> • 1/4 Octagon Style Chisel 	TC-182
NEEDLE SCALERS Page Number	Tool Configuration	Model Series
76	<ul style="list-style-type: none"> • 1/2 Square Style Chisel 	TC-1-N
	<ul style="list-style-type: none"> • 1/4 Octagon Style Chisel 	TC-182-N

HANDLES




Chipping Hammers

CHIPPING HAMMERS Page Number	Tool Configuration	Model Series
77	<ul style="list-style-type: none"> • 0.401 Round Shank Chisel • 0.371 Hex Shank Chisel 	80 Series
	<ul style="list-style-type: none"> • 0.680 Round Shank Chisel • 0.580 Hex Shank Chisel 	TC-183

METHODS OF CHISEL RETENTION


80 Series

Beehive Retainer

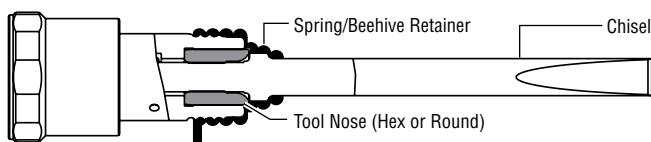

TC-183 Series

Chisel Retainer

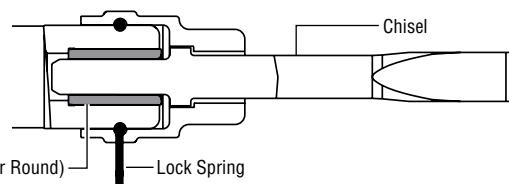

Scalers

TC-1 Series



TC-1-L

Spring Style Chisel Retainer



Standard Lever



Safety Lever



Push Handle

TC-182 Series



TC-182-L

Collar Style Chisel Retainer



Pistol Handle





Flow Through Handle

Chisel Type	Handle Type	MODEL NUMBER	Chisel Type	Handle Type	MODEL NUMBER
1/2" Square	Lever	TC-1-L	1/4" Octagon	Lever	TC-182-L
	Safety Lever	TC-1-K		Safety Lever	TC-182-K
	Push	TC-1-P		Push	TC-182-P
	Pistol	TC-1-W		Pistol	TC-182-W
	Flow Through	TC-1-FT		Flow Through	TC-182-FT
	Pipe-Extended Lever	TC-1-FL;PL48		Pipe-Extended Lever	TC-182-FL;PL48



Floor Scraper
TC-1-FL;PL48

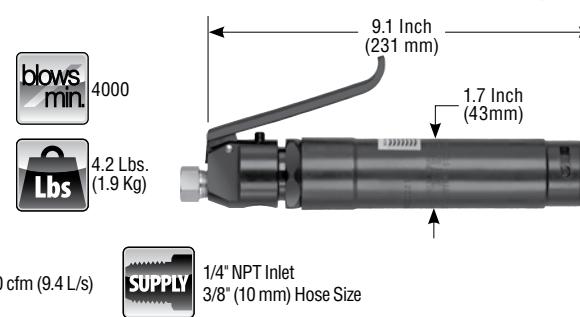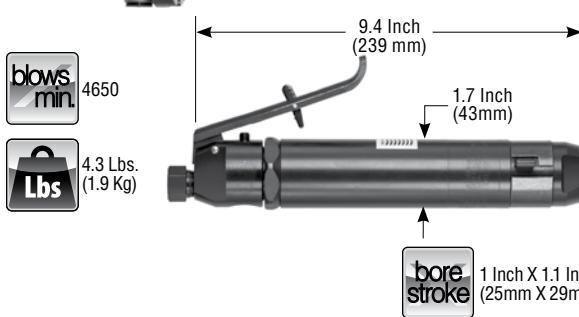

Chisels – 1/2 Inch Square Shank



Description	Cutting Edge	Overall Length	Part Number
Narrow Flat Chisel	3/4" (19mm)	7" (178mm)	839051
Narrow Flat Chisel	3/4" (19mm)	12" (305mm)	839341
Narrow Flat Chisel	3/4" (19mm)	18" (457mm)	839335
Wide Angle Chisel	1 3/8" (34.9mm)	7" (178mm)	839050
Wide Angle Chisel	1 3/8" (34.9mm)	12" (305mm)	839299
Wide Angle Chisel	1 3/8" (34.9mm)	18" (457mm)	839334
Blank Chisel		7" (178mm)	839052
Blank Chisel		12" (305mm)	839053
Blank Chisel		18" (457mm)	839054
Wide Chisel	1 3/8" (34.9mm)	7" (178mm)	839467
Wide Chisel	1 3/8" (34.9mm)	12" (305mm)	839469
2 Inch Wide Scraper	2" (50.8mm)	7" (178mm)	839468

Other Sizes And Styles Available

Chisels – 1/4 Inch Octagon



Description	Cutting Edge	Overall Length	Part Number
Narrow Flat Chisel	3/4" (19mm)	7" (17.8cm)	839601
Narrow Flat Chisel	3/4" (19mm)	12" (30.5cm)	839601-12
Blank Chisel		7" (17.8cm)	839605
Blank Chisel		12" (30.5cm)	839605-12
Wide Chisel	1 3/8" (34.9mm)	7" (17.8cm)	839602
Wide Angle Chisel	1 3/8" (34.9mm)	7" (17.8cm)	839604
Wide Angle Chisel	1 3/8" (34.9mm)	12" (30.5cm)	839604-12

Other Sizes And Styles Available

WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.

Needle Scalers

TC-1 Series



TC-1-NL

TC-182 Series



TC-182-NL



Standard Lever



Safety Lever



Push Handle




Pistol Handle




Flow Through Handle

Handle Type	MODEL NUMBER	Handle Type	MODEL NUMBER
Lever	TC-1-NL	Lever	TC-182-NL
Safety Lever	TC-1-NK	Safety Lever	TC-182-NK
Push	TC-1-NP	Push	TC-182-NP
Pistol	TC-1-NW	Pistol	TC-182-NW

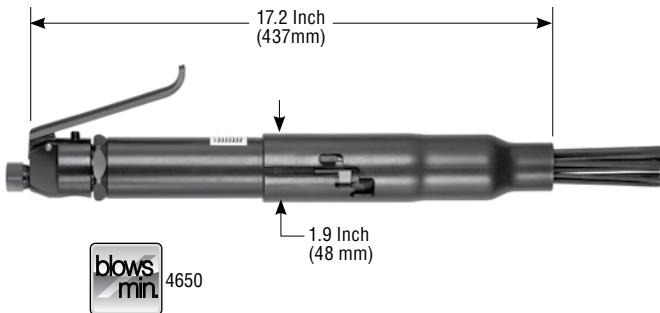

blows/min
4650

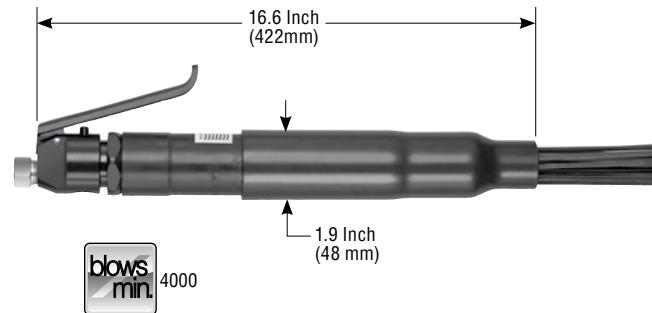

blows/min
4000

bore
stroke
1 Inch X 1.1 Inch
(25mm X 29mm)

Lbs
6.4 Lbs. (2.9 Kg)

cfm
20 cfm (9.4 L/s)

SUPPLY
1/4" NPT Inlet
3/8" (10 mm) Hose Size

Chisels – 1/2 Inch Square Shank



Description	Cutting Edge	Overall Length	Part Number
Narrow Flat Chisel	3/4" (19mm)	7" (178mm)	839051
Narrow Flat Chisel	3/4" (19mm)	12" (305mm)	839341
Narrow Flat Chisel	3/4" (19mm)	18" (457mm)	839335
Wide Angle Chisel	1 3/8" (34.9mm)	7" (178mm)	839050
Wide Angle Chisel	1 3/8" (34.9mm)	12" (305mm)	839299
Wide Angle Chisel	1 3/8" (34.9mm)	18" (457mm)	839334
Blank Chisel		7" (178mm)	839052
Blank Chisel		12" (305mm)	839053
Blank Chisel		18" (457mm)	839054
Wide Chisel	1 3/8" (34.9mm)	7" (178mm)	839467
Wide Chisel	1 3/8" (34.9mm)	12" (305mm)	839469
2 Inch Wide Scraper	2" (50.8mm)	7" (178mm)	839468

Other Sizes And Styles Available

Chisels – 1/4 Inch Octagon



Description	Cutting Edge	Overall Length	Part Number
Narrow Flat Chisel	3/4" (19mm)	7" (17.8cm)	839601
Narrow Flat Chisel	3/4" (19mm)	12" (30.5cm)	839601-12
Blank Chisel		7" (17.8cm)	839605
Blank Chisel		12" (30.5cm)	839605-12
Wide Chisel	1 3/8" (34.9mm)	7" (17.8cm)	839602
Wide Angle Chisel	1 3/8" (34.9mm)	7" (17.8cm)	839604
Wide Angle Chisel	1 3/8" (34.9mm)	12" (30.5cm)	839604-12

Other Sizes And Styles Available



Chipping Hammers

80 Series




TC-183 Series



Handle Type	Handle Type	MODEL NUMBER	Handle Type	Handle Type	MODEL NUMBER
0.371 Hex Shank	Lever	80L;HEX	0.580 Hex Shank	Lever	TC-183-L;HEX
	Safety Lever	80K;HEX		Safety Lever	TC-183-K;HEX
	Pistol	80W;HEX		Push	TC-183-P;HEX
0.401 Round Shank	Lever	80L;RND	0.680 Round Shank	Pistol	TC-183-W;HEX
	Safety Lever	80K;RND		Lever	TC-183-L;RND
	Pistol	80W;RND		Safety Lever	TC-183-K;RND
	Push	TC-183-P;RND			
	Pistol	TC-183-W;RND			

bore 	0.6 Inch X 1.4 Inch (15mm X 36mm)
Lbs 	2.8 Lbs. (1.3 Kg)
cfm 	15 cfm (7.1 L/s)
SUPPLY 	1/4" NPT Inlet 3/8" (10 mm) Hose Size

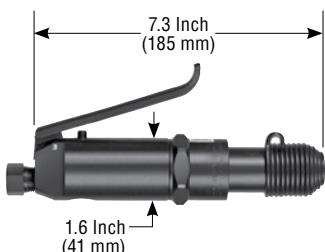

bore 	0.9 Inch X 3.0 Inch (23mm X 76mm)
Lbs 	5.5 Lbs. (2.5 Kg)
cfm 	25 cfm (11.8 L/s) Max
SUPPLY 	1/4" NPT Inlet 3/8" (10 mm) Hose Size



Handle Types



Chisels – 0.401 Round

Description	Cutting Edge	Overall Length	Part Number
Flat Chisel	1/2" (12.7mm)	7" (178mm)	595002
Blank Chisel		7" (178mm)	595005

Other Sizes And Styles Available

Chisels – 0.580 Hexagon

Description	Cutting Edge	Overall Length	Part Number
Flat Chisel	1" (25.4mm)	9" (229cm)	839008
Flat Chisel	1" (25.4mm)	12" (30.5cm)	839009
Flat Chisel	1" (25.4mm)	18" (457cm)	839010
Moil Point		9" (229cm)	839018
Wide Flat	2" (50.8mm)	12" (30.5cm)	839016

Other Sizes And Styles Available

Chisels – 0.371 Hexagon

Description	Cutting Edge	Overall Length	Part Number
Flat Chisel	1/2" (12.7mm)	12" (305mm)	595016

Other Sizes And Styles Available

Chisels – 0.680 Round

Description	Cutting Edge	Overall Length	Part Number
Flat Chisel	1" (25.4mm)	9" (229cm)	839014
Flat Chisel	1" (25.4mm)	12" (30.5cm)	839083
Flat Chisel	1" (25.4mm)	18" (457cm)	839045
Moil Point		9" (229cm)	839023
Wide Flat	1.5" (38.1mm)	9" (229cm)	839019
Wide Flat	2" (50.8mm)	9" (229cm)	839017

Other Sizes And Styles Available

WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.

Motors**Top Cat Air Motors**

MOTORS

79**300 SERIES MOTORS**

- 0.7 H.P.
- 150-30000 Speed Range

80**400 SERIES MOTORS**

- 1.2 H.P.
- 120-20000 Speed Range

81**500 & 520 SERIES MOTORS**

- 1.5 and 2.0 H.P.
- 125-4000 Speed Range

82**664 SERIES MOTORS**

- 4.0 H.P.
- 85-850 Speed Range



Motors

0.7 H.P. Motors







300HGESFT



300H(X)MSFT



300H(X)MSBRFT

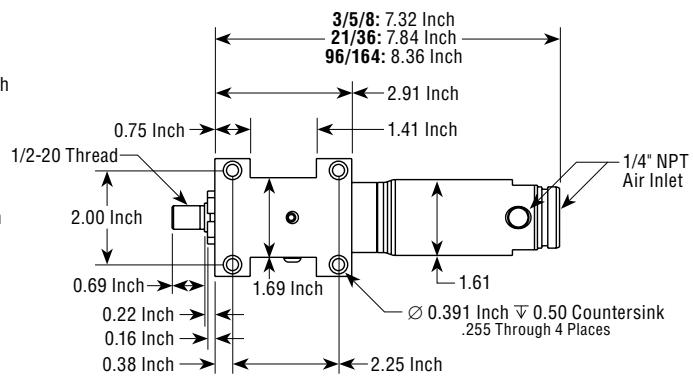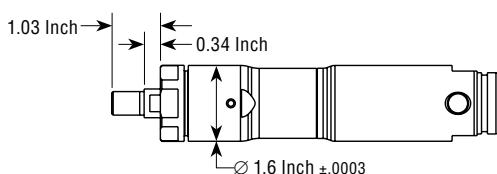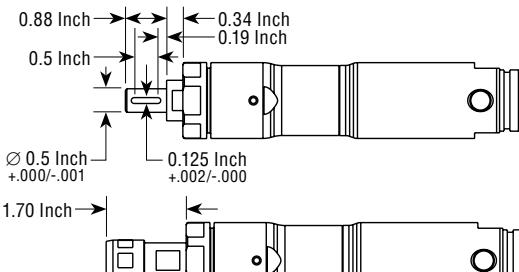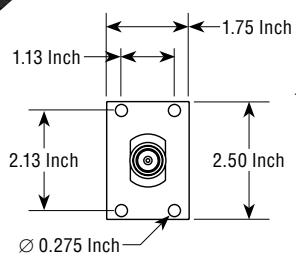


Output	Gear Ratio	RPM		Stall Torque		Weight	Round Housing	Flange and Base Mounting
		at Max H.P.	Free Speed	ft. lbs.	Nm		MODEL NUMBER	MODEL NUMBER
1/2 Inch Keyed	3:1	4125	8250	2.6	3.5	2.50 Lbs. (1.13 Kg)	300H3MSFT;8250;K500	300H3MSBRFT;8250;K500
	5:1	3000	6000	3.5	4.8		300H5MSFT;6000;K500	300H5MSBRFT;6000;K500
	8:1	1875	3750	5.8	7.9		300H8MSFT;3750;K500	300H8MSBRFT;3750;K500
	21:1	650	1300	16.0	21.8	5.00 Lbs. (2.27 Kg)	300H21MSFT;1300;K500	300H21MSBRFT;1300;K500
	36:1	400	800	26.7	36.3		300H36MSFT;800;K500	300H36MSBRFT;800;K500
	98:1	150	300	73.7	99.8	7.50 Lbs. (3.39 Kg)	300H98MSFT;300;K500	300H98MSBRFT;300;K500
	164:1	75	150	123.2	167.0		300H164MSFT;150;K500	300H164MSBRFT;150;K500
1/2 X 20 Threaded	3:1	4125	8250	2.6	3.5	2.46 Lbs. (1.11 Kg)	300H3MSFT;8250;T520	300H3MSBRFT;8250;T520
	5:1	3000	6000	3.5	4.8		300H5MSFT;6000;T520	300H5MSBRFT;6000;T520
	8:1	1875	3750	5.8	7.9		300H8MSFT;3750;T520	300H8MSBRFT;3750;T520
	21:1	650	1300	16.0	21.8	4.76 Lbs. (2.16 Kg)	300H21MSFT;1300;T520	300H21MSBRFT;1300;T520
	36:1	400	800	26.7	36.3		300H36MSFT;800;T520	300H36MSBRFT;800;T520
	98:1	150	300	73.7	99.8	6.69 Lbs. (3.03 Kg)	300H98MSFT;300;T520	300H98MSBRFT;300;T520
	164:1	75	150	123.2	167.0		300H164MSFT;150;T520	300H164MSBRFT;150;T520
Collet	1:1	15000	30000	0.8	1.1	1.80 Lbs. (0.82 Kg)	300HGESFT;30000;1/4	
	1:1	12500	25000	0.8	1.1		300HGESFT;25000;1/4	
	1:1	9000	18000	0.8	1.1		307HGESFT;18000;1/4	
	3:1	4125	8250	2.6	3.5	2.57 Lbs. (1.16 Kg)	300HGE3MSFT;8250;1/4	300HGE3MSBRFT;8250;1/4
	5:1	3000	6000	3.5	4.8		300HGE5MSFT;6000;1/4	300HGE5MSBRFT;6000;1/4
	8:1	1875	3750	5.8	7.9		300HGE8MSFT;3750;1/4	300HGE8MSBRFT;3750;1/4
	21:1	650	1300	16.0	21.8	4.87 Lbs. (2.21 Kg)	300HGE21MSFT;1300;1/4	300HGE21MSBRFT;1300;1/4
	36:1	400	800	26.7	36.3		300HGE36MSFT;800;1/4	300HGE36MSBRFT;800;1/4
	98:1	150	300	73.7	99.8		300HGE98MSFT;300;1/4	300HGE98MSBRFT;300;1/4
	164:1	75	150	123.2	167.0	7.17 Lbs. (3.24 Kg)	300HGE164MSFT;150;1/4	300HGE164MSBRFT;150;1/4

Note: The Flange & Base Mounting option adds 1.22 Lbs. (0.55 Kg) to weight

Motors

1.2 H.P. Motors

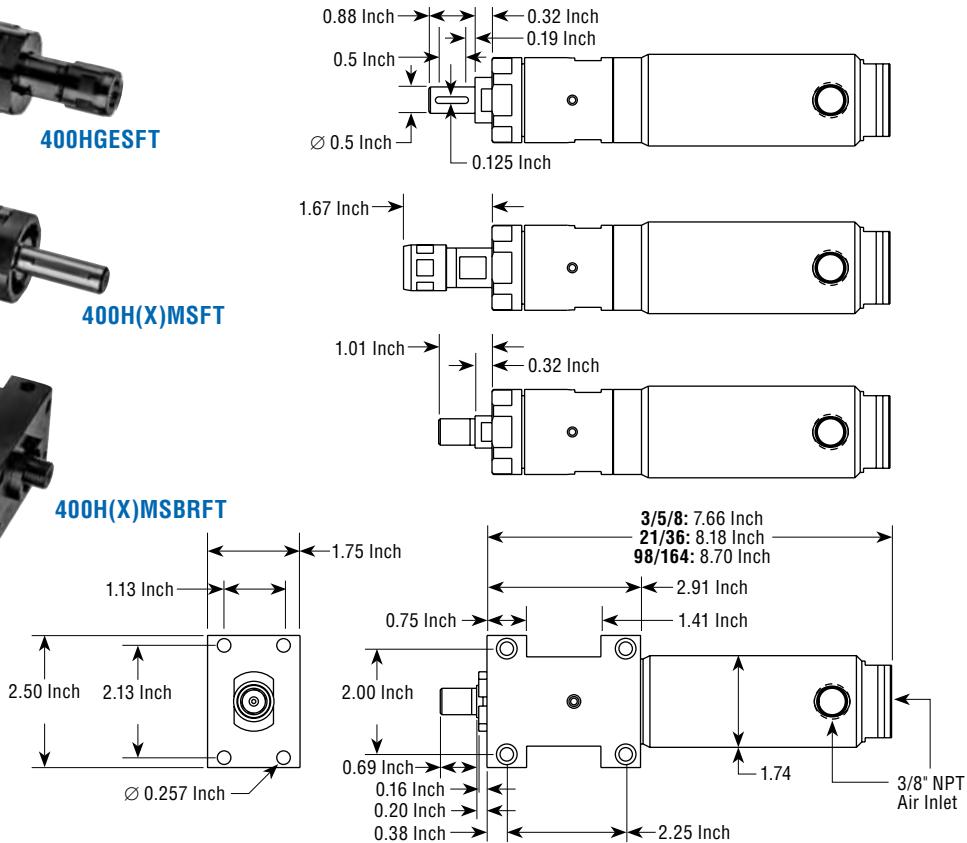

Output	Gear Ratio	RPM		Stall Torque		Weight	Round Housing	Flange and Base Mounting
		at Max H.P.	Free Speed	ft. lbs.	Nm		MODEL NUMBER	MODEL NUMBER
1/2 Inch Keyed	3:1	2250	5500	4.6	6.3	3.23 Lbs. (1.46 Kg)	400H3MSFT;5500;K500	400H3MSBRFT;5500;K500
	5:1	2000	4000	6.2	8.4		400H5MSFT;4000;K500	400H5MSBRFT;4000;K500
	8:1	1250	2500	10.3	14.0		400H8MSFT;2500;K500	400H8MSBRFT;2500;K500
	21:1	450	900	28.4	38.6	5.53 Lbs. (2.51 Kg)	400H21MSFT;900;K500	400H21MSBRFT;900;K500
	36:1	275	550	47.5	64.6		400H36MSFT;550;K500	400H36MSBRFT;550;K500
	98:1	100	200	131.1	177.7	7.83 Lbs. (3.54 Kg)	400H98MSFT;200;K500	400H98MSBRFT;200;K500
	164:1	60	120	219.1	297.1		400H164MSFT;120;K500	400H164MSBRFT;1200;K500
1/2 X 20 Threaded	3:1	2250	5500	4.6	6.3	3.12 Lbs. (1.41 Kg)	400H3MSFT;5500;T520	400H3MSBRFT;5500;T520
	5:1	2000	4000	6.2	8.4		400H5MSFT;4000;T520	400H5MSBRFT;4000;T520
	8:1	1250	2500	10.3	14.0		400H8MSFT;2500;T520	400H8MSBRFT;2500;T520
	21:1	450	900	28.4	38.6	5.37 Lbs. (2.43 Kg)	400H21MSFT;900;T520	400H21MSBRFT;900;T520
	36:1	275	550	47.5	64.6		400H36MSFT;550;T520	400H36MSBRFT;550;T520
	98:1	100	200	131.1	177.7	7.62 Lbs. (3.44 Kg)	400H98MSFT;200;T520	400H98MSBRFT;200;T520
	164:1	60	120	219.1	297.1		400H164MSFT;120;T520	400H164MSBRFT;120;T520
Collet	1:1	10000	20000	1.3	1.8	2.53 Lbs. (1.15 Kg)	400HGESFT;20000;1/4	
	1:1	9000	18000	1.3	1.8		400HGESFT;18000;1/4	
	1:1	7500	15000	1.3	1.8	2.67 Lbs. (1.21 Kg)	407HGESFT;15000;1/4	
	1:1	6000	12000	1.3	1.8		407HGESFT;12000;1/4	
	3:1	2250	5500	4.6	6.3	3.30 Lbs. (1.49 Kg)	400HGE3MSFT;5500;1/4	400HGE3MSBRFT;5500;1/4
	5:1	2000	4000	6.2	8.4		400HGE5MSFT;4000;1/4	400HGE5MSBRFT;4000;1/4
	8:1	1250	2500	10.3	14.0	5.55 Lbs. (2.51 Kg)	400HGE8MSFT;2500;1/4	400HGE8MSBRFT;2500;1/4
	21:1	450	900	28.4	38.6		400HGE21MSFT;900;1/4	400HGE21MSBRFT;900;1/4
	36:1	275	550	47.5	64.6	7.77 Lbs. (3.52 Kg)	400HGE36MSFT;550;1/4	400HGE36MSBRFT;550;1/4
	98:1	100	200	131.1	177.7		400HGE98MSFT;200;1/4	400HGE98MSBRFT;200;1/4
	164:1	60	120	219.1	297.1		400HGE164MSFT;120;1/4	400HGE164MSBRFT;120;1/4

Note: The Flange & Base Mounting option adds 1.22 Lbs. (0.55 Kg) to weight

Motors

500 Series Motors




500H1MFT;K750

500H1MFT;T625

500H2MFT;T625

Output	Gear Ratio	RPM		Stall Torque		Weight	MODEL NUMBER
		at Max H.P.	Free Speed	ft. lbs.	Nm		
3/4 Inch Keyed	4:1	2000	4000	7.3	9.9	6.58 Lbs. (2.98 Kg)	500H1MFT;4000;K750
	16:1	500	1000	29.3	39.8	8.18 Lbs. (3.71 Kg)	500H2MFT;1000;K750
	64:1	125	250	117.3	159.9	9.78 Lbs. (4.43 Kg)	500H3MFT;250;K750
5/8 X 11 Threaded	4:1	2000	4000	7.3	9.9	6.15 Lbs. (2.79 Kg)	500H1MFT;4000;T625
	18:1	500	1000	29.3	39.8	7.75 Lbs. (3.51 Kg)	500H2MFT;1000;T625
	64:1	125	250	117.3	159.9	9.35 Lbs. (4.24 Kg)	500H3MFT;250;T625

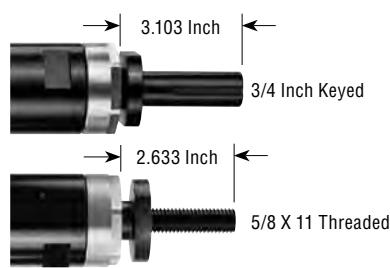


520 Series Motors



520H1MFT ;K750

520H2MFT;T625

Output	Gear Ratio	RPM		Stall Torque		Weight	MODEL NUMBER
		at Max H.P.	Free Speed	ft. lbs.	Nm		
3/4 Inch Keyed	4:1	1500	3000	14.7	20.0	8.47 Lbs. (3.84 Kg)	520H1MFT;3000;K750
	16:1	375	750	58.7	79.8	10.07 Lbs. (4.56 Kg)	520H2MFT;750;K750
	64:1	90	180	234.7	319.2	11.67 Lbs. (5.29 Kg)	500H3MFT;180;K750
5/8 X 11 Threaded	4:1	1500	3000	14.7	20.0	8.04 Lbs. (3.64 Kg)	520H1MFT;3000;T625
	16:1	375	750	58.7	79.8	9.64 Lbs. (4.37 Kg)	520H2MFT;750;T625
	64:1	90	180	234.7	319.2	11.24 Lbs. (5.09 Kg)	500H3MFT;180;T625

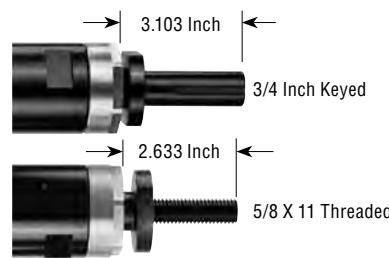



Motors

664 Series Motors




664H1MFT




664H2MFT;T625


Output	Gear Ratio	RPM		Stall Torque		Weight	MODEL NUMBER
		at Max H.P.	Free Speed	ft. lbs.	Nm		
3/4 Inch Keyed	10:1	425	850	73.2	99.2	15.08 Lbs. (6.83 Kg)	664H1MFT;850;K1
	100:1	42	85	720.3	976.6	22.89 Lbs. (10.37 Kg)	664H2MFT;85;K1

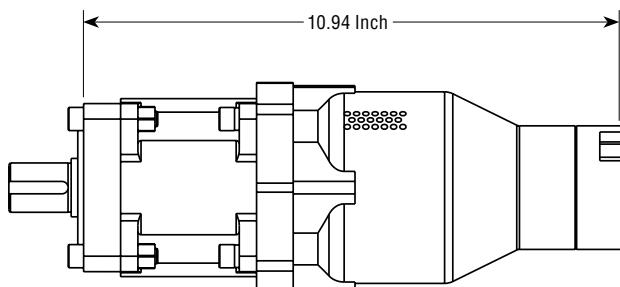

664H1MFT

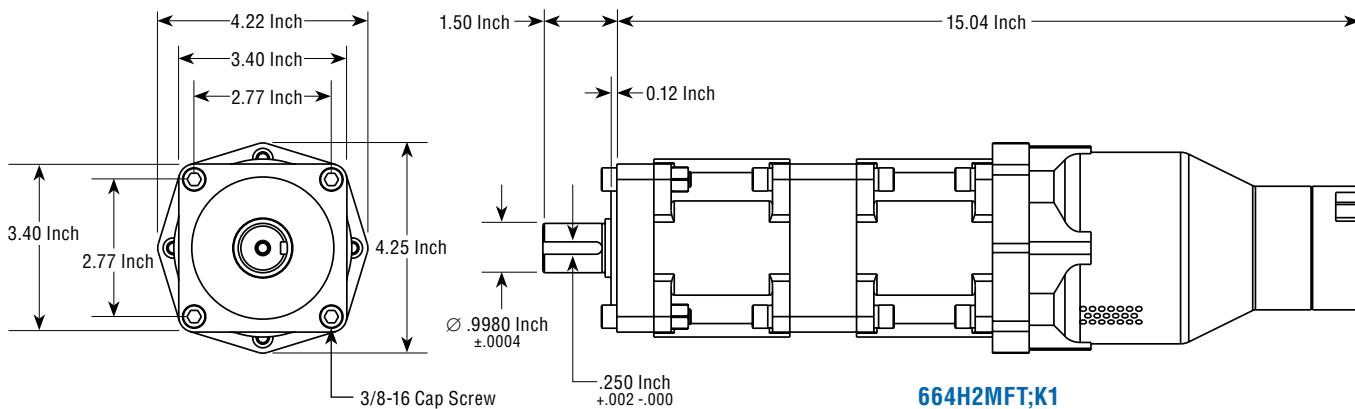

664H2MFT;K1

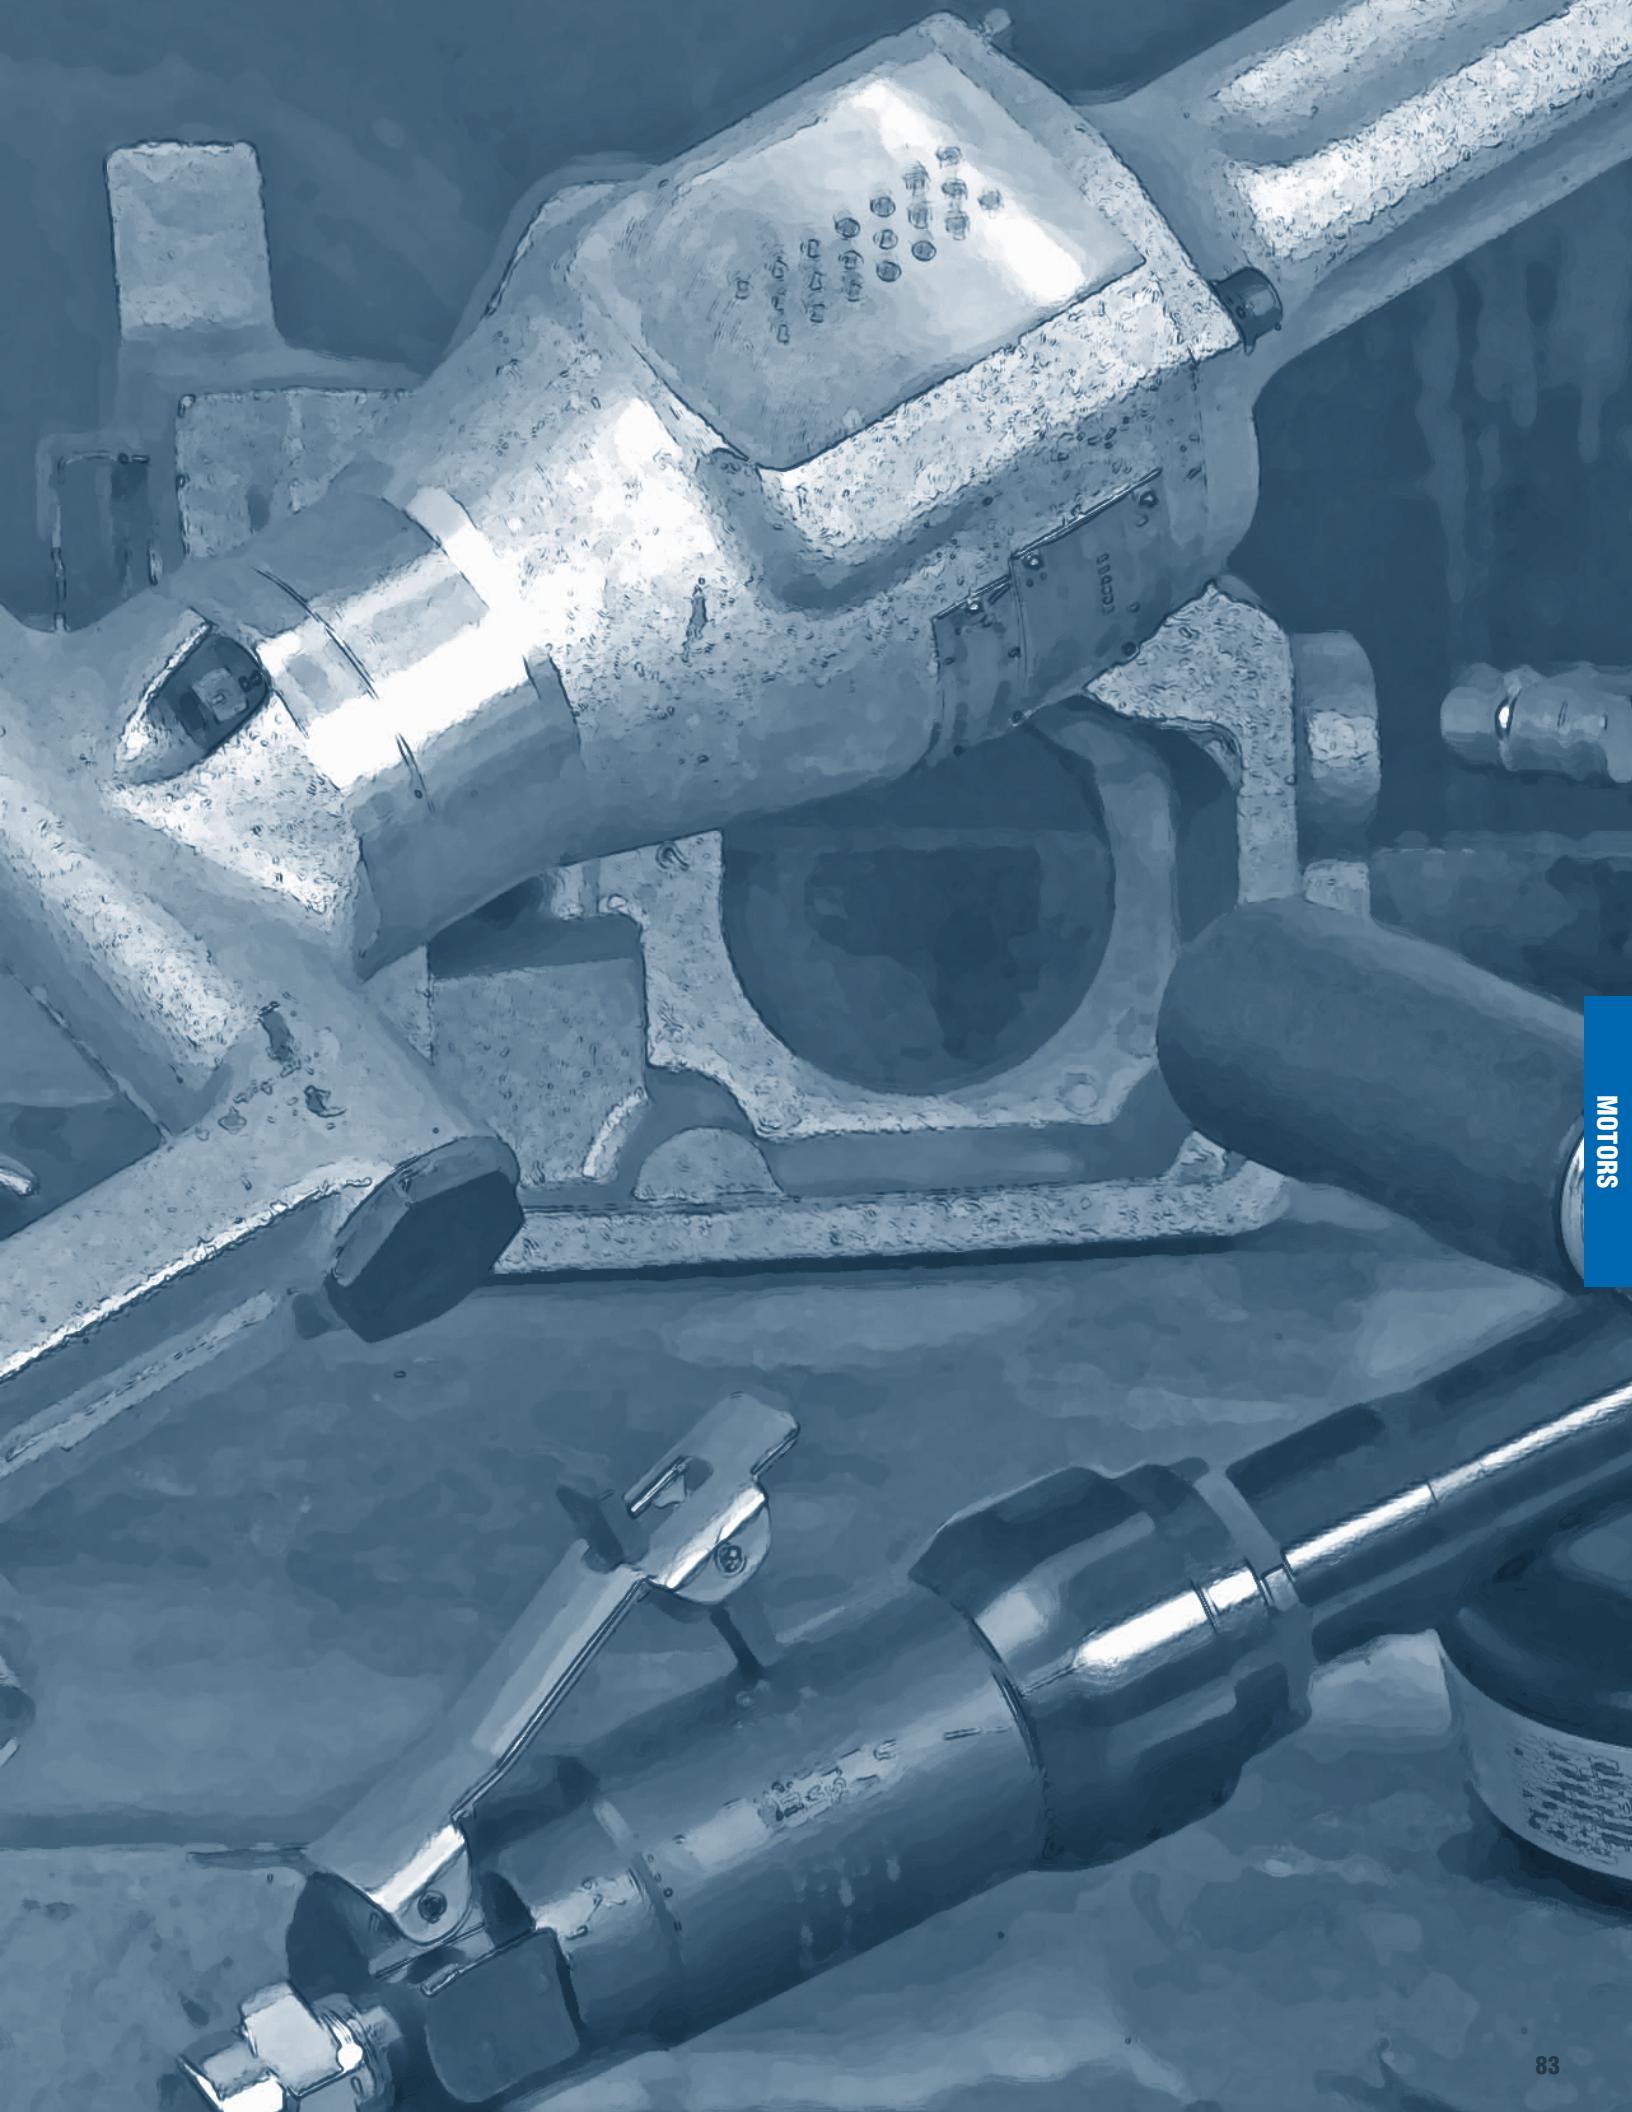

Sanding Pads



SANDING PADS FOR VERTICAL SANDERS

Model	Size	Part Number	Max. Rated Speed
520V	7 Inch	849913	8500 RPM
	9 Inch	849914	6500 RPM
56S	7 Inch	849913	8500 RPM
	9 Inch	849914	6500 RPM

5/8-11 Nut	849259
Pin Wrench	102-SPWR

SANDING PADS FOR RIGHT ANGLE SANDERS

Model	Spindle Output	Size	Part Number	Max. Rated Speed
300RA(E)(X)M	5/8-11 Output Spindle	5 Inch	849848	10000 RPM
400RA(E) & 407RA(E)	3/8-24 Output Spindle	4 Inch	889271-A	12000 RPM
		5 Inch	849848-A	10000 RPM
	5/8-11 Output Spindle	4 Inch	889271	12000 RPM
		5 Inch	849848	10000 RPM
400RA(E)(X)M	5/8-11 Output Spindle	7 Inch	849913	8500 RPM
4520RA & 4620RA	5/8-11 Output Spindle	7 Inch	849913	8500 RPM
4620RA(X)M	5/8-11 Output Spindle	7 Inch	849913	8500 RPM
520RA	5/8-11 Output Spindle	7 Inch	849913	8500 RPM

3/8-24 Nut	849259-A
5/8-11 Nut	849259
Pin Wrench	102-SPWR



Other Accessories

SCREEN HANDLE BUSHINGS

Description	Part Number
1/4" NPT Male to 1/4" NPT Female	400-27
3/8" NPT Male to 3/8" NPT Female	841552
3/8" NPT Male to 1/4" NPT Female	841553
1/2" NPT Male to 1/2" NPT Female	841555

COLLETS

Type	Description	Part Number
2 Pc. Collets (Split Style Collets)	3/8-24 Type 1 Spindle to 1/4" Collet	TC-1010
	3/8-24 Type 1 Spindle to 3/8" Collet	TC-1010-3/8
	3/8-24 Cone Spindle to 1/4" Collet	TC-1012A
	5/8-11 Cone Spindle to 1/4" Collet	TC-1104
3 Pc. Collet (Insert Style Collet)	3/8-24 Cone Spindle to XX Collet	AA-H209-XX

Note: The XX in the AA-H209 represents the insert size. (ex.- 1/4, 6MM,3/8, etc.)

CONE WHEEL ADAPTERS

Model	Description	Part Number
400GH4/407GH4/500H4/507H4	3/8-24 Type 1 Spindle to 3/8-24 Cone	400-77
520H	5/8-11 Type 1 Spindle to 5/8-11 Cone	700-4CW
56H/65H		

Guards



GUARDS FOR VERTICAL GRINDERS

Type 27 Wheel Guards		
Model	Size	Part Number
520V	7 Inch	NV-G-727
	9 Inch	NV-G-927
54V	7 Inch	700-200
	9 Inch	700-201
64V	7 Inch	700-200
	9 Inch	700-201

Type 28 Wheel Guards		
Model	Size	Part Number
520V	7 Inch	NV-G-728
	9 Inch	NV-G-928
54V	7 Inch	700-200-28
	9 Inch	700-201-28
64V	7 Inch	700-200-28
	9 Inch	700-201-28

GUARDS FOR RIGHT ANGLE GRINDERS

Depressed Center Wheel (Type 27) Guards		
Model	Size	Part Number
300RA	4 Inch	HRGD-427
	4 1/2 Inch	HRGD-4527
300RAE	4 Inch	HRGD-427
	4 1/2 Inch	HRGD-4527
400RA	4 Inch	HRGD-427
	4 1/2 Inch	HRGD-4527
	5 Inch	HRGD-527
400RAE	4 Inch	HRGD-427
	4 1/2 Inch	HRGD-4527
	5 Inch	HRGD-527
	6 Inch	HRGD-627
410RA	4 Inch	HRGD-427
	4 1/2 Inch	HRGD-4527
410RAE	4 Inch	HRGD-427
	4 1/2 Inch	HRGD-4527
320RA	4 Inch	ERGD-427
420RA		
520RA	7 Inch	NRA-727
	9 Inch	NRA-927

Type 1 Cut-Off Wheel (Type 41) Guards		
Model	Size	Part Number
300RA	4 Inch	HRGD-441
	4 1/2 Inch	HRGD-4541
300RAE	4 Inch	HRGD-441
	4 1/2 Inch	HRGD-4541
400RA	4 Inch	HRGD-441
	4 1/2 Inch	HRGD-4541
	5 Inch	HRGD-541
400RAE	4 Inch	HRGD-441
	4 1/2 Inch	HRGD-4541
	5 Inch	HRGD-541
	6 Inch	HRGD-641
410RA	4 Inch	HRGD-441
	4 1/2 Inch	HRGD-4541
410RAE	4 Inch	HRGD-441
	4 1/2 Inch	HRGD-4541
320RA	4 Inch	ERGD-441
420RA		
520RA	10 Inch	NRA-1041

CUP WHEEL GUARDS

Type 11 Wheel Guards

Model	Size	Part Number
520V	4 Inch	NV-G-411
	4 Inch	560-46
	5 Inch	560-45
	6 Inch	412988
58C	5 Inch	560-45
	6 Inch	412988
68C	5 Inch	560-45
	6 Inch	412988

GUARDS FOR HORIZONTAL GRINDERS

Type 1 Wheels Guards

Model	Size	Part Number
400GH4	3 Inch	HG3-01
407GH4	4 Inch	HG4-01
500H4	3 Inch	HG3-01
507H4	4 Inch	HG4-01
520H	4 Inch	5204-01
	6 Inch	5206-01
56H	6 Inch	650-HS-56A
	8 Inch	650-HS-58A
65H	6 Inch	650-HS-56A
	8 Inch	650-HS-58A

GUARDS FOR EXTENDED GRINDERS

Type 1 Wheels Guards

Model	Size	Part Number
400GEH4	3 Inch	HG3-01
407GEH4	4 Inch	HG4-01
520HGEH	4 Inch	5204-01
	6 Inch	5206-01
65HGEH	6 Inch	5206-01

GUARDS FOR DIE GRINDERS

Type 1 Wheels Guards

Model	Size	Part Number
400GT4	3 Inch	4503-01
407GT4	4 Inch	4504-01



Maintenance Tools

MAINTENANCE TOOLS
Bearing Drivers/Spindle Holders
Vertical Grinders

Model	Description	Bearing	Part Number
54V/58C/64V/68C	Bearing Driver	700-7 (Front)	1100-834
	Bearing Driver	700-9 (Rear)	1100-808
	Spindle Holder		1100-650

Right Angle Grinders/Sanders

Model	Description	Bearing	Part Number
300RA(E)	Bearing Driver	400-9	1100-802
320RA	Bearing Driver	400-9	1100-802
330RA / 340RA	Bearing Driver	400-9	1100-802
3101RA	Bearing Driver	400-9	1100-802
400RA(E)/410RA(E)	Bearing Driver	H9	1100-802
420RA	Bearing Driver	H9	1100-802
4101RA	Bearing Driver	H9	1100-802
4520RA/4620RA	Bearing Driver	H9	1100-802

Horizontal Grinders

Model	Description	Bearing	Part Number
300EH	Bearing Driver	400-9	1100-802
300GH	Bearing Driver	400-9	1100-802
	Coupling Nut Holder		1100-862
400GH	Bearing Driver	H9	1100-802
	Coupling Nut Holder		1100-862
56H/65H	Bearing Driver	550-10H (Middle)	1100-822
	Bearing Driver	700-9 (Rear)	1100-808
	Spindle Holder		1100-650

MAINTENANCE TOOLS
Depressed Center Wheel Adapters
Vertical Grinders

Model	Wheel Size	Description	Part Number
54V/64V/520V	7 Inch or 9 Inch	Depressed Center Wheel Adapter	849269

Right Angle Grinders

Model	Wheel Size	Description	Part Number
300RA(E)/400RA(E)/410RA(E)	4"	3/8-24 (Long Spindle) to 3/8 ID Adapter Set	490-K
320RA/420RA		3/8-24 (Long Spindle) to 5/8 ID Adapter Set	AA-ADT27-354
300RA(E)/400RA(E)/410RA(E)		3/8-24 (Short Spindle) to 3/8 ID Adapter Set	490-KR
400RA(E)	4 1/2"	3/8-24 (Long Spindle) to 7/8 ID Adapter Set	AA-ADT27-375
400RAE		5/8-11 to 7/8 ID Adapter Set	AA-ADT27-575
520RA	7 Inch or 9 Inch	Depressed Center Wheel Adapter	849269

MAINTENANCE TOOLS
Bearing Drivers/Spindle Holders
Extended Grinders

Model	Description	Bearing	Part Number
400EH/400GEH	Bearing Driver	H9	1100-802
	Coupling Nut Holder		1100-862
520HGEH	Coupling Nut Holder		1100-862
	Bearing Driver		1100-808
	Spindle Holder		1100-650
65HGEH	Coupling Nut Holder		1100-862

Die Grinders

Model	Description	Bearing	Part Number
300GE/300HGE	Bearing Driver	400-9	1100-802
400GE/400HGE/400GT	Bearing Driver	H9	1100-802



Repair Kits

Vertical Grinders/Sanders

Model	Description	Part Number
520V	Repair Kit	510254
54V/56S/58C	Repair Kit	510077
64V/68C	Repair Kit	510088
727V/711C	Repair Kit	510488

Horizontal Grinders/Sanders

Model	Description	Part Number
300EH	Repair Kit	510310
300GHD	Repair Kit	510314
300GH3M	Repair Kit	510314
	Gear Train Kit	510344
300GH5M / 300GH8M	Repair Kit	510314
	Gear Train Kit	510346
400GH/407GH	Repair Kit	510286
400GH3M	Repair Kit	510286
	Gear Train Kit	510344
400GH5M / 400GH8M	Repair Kit	510286
	Gear Train Kit	510346
500H1M	Repair Kit	510490
507H	Repair Kit	510492
520H	Repair Kit	510494
56H	Repair Kit	510081
65H	Repair Kit	510082

Extended Grinders

Model	Description	Part Number
400EH	Repair Kit	510250
400GEH	Repair Kit	510252
520HGEH	Repair Kit	510280
65HGEH	Repair Kit	510306
65NEH	Repair Kit	510496

Right Angle Grinders/Sanders

Model	Description	Part Number
300RA	Motor Repair Kit	510312
	Head Repair Kit	510318
300RAE	Motor Repair Kit	510312
	Head Repair Kit	510320
300RA3M	Motor Repair Kit	510312
	Gear Train Kit	510344
	Head Repair Kit	510318
300RA5M / 300RA8M	Motor Repair Kit	510312
	Gear Train Kit	510346
	Head Repair Kit	510318
300RAE3M	Motor Repair Kit	510312
	Gear Train Kit	510344
	Head Repair Kit	510320
300RAE5M / 300RAE8M	Motor Repair Kit	510312
	Gear Train Kit	510346
	Head Repair Kit	510320
300VGE	Repair Kit	510312
320RA (Threaded Output)	Motor Repair Kit	510312
320RA (Collet Output)	Motor Repair Kit	510312
330RA/340RA (Threaded Output)	Motor Repair Kit	510312
330RAD/340RAD (Collet Output)	Motor Repair Kit	510334
400RA/407RA/410RA	Motor Repair Kit	510284
400RAE/407RAE/410RAE	Motor Repair Kit	510284
400RA3M	Motor Repair Kit	510284
	Gear Train Kit	510344
	Head Repair Kit	510318
400RA5M/ 400RA8M	Motor Repair Kit	510284
	Gear Train Kit	510346
	Head Repair Kit	510318
400RAE3M	Motor Repair Kit	510284
	Gear Train Kit	510344
	Head Repair Kit	510320
400RAE5M/ 400RAE8M	Motor Repair Kit	510284
	Gear Train Kit	510346
	Head Repair Kit	510320
420RA (Threaded Output)	Motor Repair Kit	510284
	Head Repair Kit	510330
420RAD (Collet Output)	Motor Repair Kit	510284
520RA	Motor Repair Kit	510260-A
3101RA	Motor Repair Kit	510312
	Head Repair Kit	510338
4101RA	Motor Repair Kit	510284
	Head Repair Kit	510338
4520RA	Motor Repair Kit	510284
	Head Repair Kit	510308
4620RA	Motor Repair Kit	510284
	Head Repair Kit	510308
4620RA3M	Motor Repair Kit	510284
	Gear Train Kit	510344
	Head Repair Kit	510308
4620RA5M / 4620RA8M	Motor Repair Kit	510284
	Gear Train Kit	510346
	Head Repair Kit	510308

GENERAL NOTE: Right angle head repair kits do not include the angle gears.



Repair Kits

Die Grinders/Sanders

Model	Description	Part Number
300GE/307GE	Repair Kit	510312
300HGE/307HGE	Repair Kit	510300
300HGE3M/300GT3M	Motor Repair Kit	510486
	Gear Train Kit	510344
300HGE5M/300GT5M 300HGE8M/300GT8M	Repair Kit	510486
	Gear Train Kit	510346
400GE/407GE	Repair Kit	510284
400HGE/407HGE 400GT/407GT	Repair Kit	510282
400HGE3M/400GT3M	Motor Repair Kit	510412
	Gear Train Kit	510344
400HGE5M/400GT5M 400HGE8M/400GT8M	Motor Repair Kit	510412
	Gear Train Kit	510346

Bench Grinder

Model	Description	Part Number
66VBG	Repair Kit	510484

Belt Sander

Model	Description	Part Number
300VBL	Repair Kit	510312

Abrasive Cut Off Tools

Model	Description	Part Number
65VBW	Repair Kit	510088
662VBW	Repair Kit	510498

Drills

Model	Description	Part Number
300D3M	Motor Repair Kit	510312
	Gear Train Kit	510344
300D5M / 300D8M	Motor Repair Kit	510312
	Gear Train Kit	510346
300DRA3M	Motor Repair Kit	510312
	Gear Train Kit	510344
	Head Repair Kit	510318
300DRA5M / 300DRA8M	Motor Repair Kit	510312
	Gear Train Kit	510346
	Head Repair Kit	510318
300DRAE3M	Motor Repair Kit	510312
	Gear Train Kit	510344
	Head Repair Kit	510320
300DRAE5M / 300DRAE8M	Motor Repair Kit	510312
	Gear Train Kit	510346
	Head Repair Kit	510320
400D3M	Motor Repair Kit	510284
	Gear Train Kit	510344
400D5M / 400D8M	Motor Repair Kit	510284
	Gear Train Kit	510346
400DRA3M	Motor Repair Kit	510284
	Gear Train Kit	510344
	Head Repair Kit	510318
400DRA5M / 400DRA8M	Motor Repair Kit	510284
	Gear Train Kit	510346
	Head Repair Kit	510318
400DRAE3M	Motor Repair Kit	510284
	Gear Train Kit	510344
	Head Repair Kit	510320
400DRAE5M / 400DRAE8M	Motor Repair Kit	510284
	Gear Train Kit	510346
	Head Repair Kit	510320
400FD3M	Motor Repair Kit	510284
	Gear Train Kit	510344
400FD5M / 400FD8M	Motor Repair Kit	510284
	Gear Train Kit	510346
500FD1M	Repair Kit	510490



T.C. Service Co. has a growing worldwide network of quality Authorized Agents that provide the total package...sales, service and repair.

Our joint goal is to provide you with the best American-made pneumatic tools for your application. TOP CAT® is proud to deliver quality tools at a competitive price. Our knowledgeable Authorized Agents can offer the kind of customer service you deserve.

We strive to keep our Authorized Agents aware of our continued "Low Vibration" advancements, so they can offer tool selection recommendations. Technical assistance is always available. Our Authorized Agents work with us to address any "custom" tool needs you may encounter.

For over 30 years, air tools with the TOP CAT® trademark have represented the highest quality in design, performance and durability. Thank you for choosing TOP CAT®. We appreciate your business.

Warranty

SUBJECT TO THE TERMS AND CONDITIONS HERINAFTER SET FORTH, T.C. SERVICE CO. WARRANTS PRODUCTS AND PARTS SOLD BY IT, INSOFAR AS THEY ARE OF ITS OWN MANUFACTURE, AGAINST DEFECTS OF MATERIAL AND WORKMANSHIP, UNDER USE AND SERVICE IN ACCORDANCE THE T.C. SERVICE CO.'S WRITTEN INSTRUCTIONS, RECOMMENDATIONS, AND RATINGS FOR INSTALLATION, OPERATION, MAINTENANCE, AND SERVICE OF PRODUCTS, FOR A PERIOD OF ONE YEAR FROM THE DATE OF SHIPMENT BY T.C. SERVICE CO., OR ANY OF T.C. SERVICE CO.'S AUTHORIZED DISTRIBUTORS. THIS WARRANTY DOES NOT APPLY TO MISUSED, ABUSED, MODIFIED, OR TO USE ATTRIBUTED TO NORMAL WEAR OF THE TOOL.

THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT, AS T.C. SERVICE CO. MAY ELECT, OF ANY DEFECTIVE PARTS, REGARDING WHICH, UPON DISCOVERY OF THE DEFECTS, THE PURCHASER HAS GIVEN IMMEDIATE WRITTEN NOTICE. INSTALLATION AND TRANSPORTATION COSTS ARE NOT INCLUDED. T.C. SERVICE CO. SHALL HAVE THE OPTION OF REQUIRING THE RETURN TO IT OF THE DEFECTIVE MATERIAL, TRANSPORTATION PREPAID, FOR INSPECTION.

THIS WARRANTY IS IN LIEU OF ALL OTHER, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE. THE FORGOING STATES THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY AND T.C. SERVICE CO.'S SOLE AND EXCLUSIVE LIABILITY FOR ANY CLAIMS OF DAMAGE IN CONNECTION WITH THE SALE OF PRODUCTS OR PARTS HEREUNDER. T.C. SERVICE CO. WILL IN NO EVENT BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, SPECIAL OR CONTINGENT DAMAGE OR EXPENSE ARISING DIRECTLY OR INDIRECTLY FROM ANY DEFECT IN ITS PRODUCTS OR PARTS OR FROM THE USE OF ANY DEFECTIVE PRODUCTS OR PARTS. NOR IS ANY OTHER PERSON AUTHORIZED TO ASSUME FOR T.C. SERVICE CO. ANY SUCH LIABILITY. T.C. SERVICE CO.'S LIABILITY FOR LOSSES OR DAMAGES ARISING OUT OF THE SUPPLY OR USE OF ITS PRODUCTS OR PARTS SHALL IN NO EVENT EXCEED THE PRICE CHARGED FOR SUCH PRODUCTS OR PARTS. THE GOVERNOR IS GUARANTEED FOR THE LIFE OF THE TOOL, IF NOT ABUSED.



T.C. Service Co.
38285 Pelton Road • Willoughby, Ohio 44094 U.S.A.
Phone: (440) 954-7500 • (800) 321-6876
Fax: (440) 954-7118 • (877) 800-3589
Visit our web site: www.tcservice.com
E-Mail: sales@tcservice.com



Model Listing	Description	Page
300B	Belt Sander	70
300D(X)M	Inline Drill	66
300DRA(X)M	Right Angle Drill	68
300DRAE(X)M	Extended Right Angle Drill	68
300EH	Extended Die Grinder	44
300GE	Die Grinder	58
300GH	Horizontal Grinder	44
300GH(X)M	Horizontal Sander/Polisher	46
300GT(X)M	Sander/Polisher	63
300HGE	Die Grinder	58
300HGE(X)M	Sander/Polisher	62
300RA	Right Angle Grinder	16, 22 & 30
300RA(X)M	Right Angle Sander/Polisher	36
300RAE	Extended Right Angle Grinder	17, 23 & 31
300RAE(X)M	Extended Right Angle Sander/Polisher	37
300VGE	Vertical Die Grinder	26
307GE	Die Grinder	58
307HGE	Die Grinder	58
307RA	Right Angle Grinder	30
307RAE	Right Angle Sander	31
3101RA	Right Angle Sander/Polisher	34
320RA	Right Angle Grinder	18, 25 & 33
330RA	Right Angle Die Grinder	24 & 32
340RA	Right Angle Die Grinder	24 & 32
400/410RA(X)M	Right Angle Sander/Polisher	36
400/410RAE(X)M	Extended Right Angle Sander/Polisher	37
400D(X)M	Inline Drill	66
400DRA(X)M	Right Angle Drill	68
400DRAE(X)M	Extended Right Angle Drill	68
400EH	Extended Grinder	50
400FD(X)M	Floor Drill	69
400GE	Die Grinder	59
400GEH	Extended Grinder	51
400GH	Horizontal Grinder	40, 42, 43 & 45
400GH(X)M	Horizontal Sander/Polisher	46
400GT	Die Grinder	59, 60 & 61
400GT(X)M	Sander/Polisher	63
400H(X)M	Power Supply Motor	80
400HGE	Die Grinder	59
400HGE(X)M	Sander/Polisher	62
400RA	Right Angle Grinder	16 & 30
400RAE	Right Angle Grinder	17 & 31
407GEH	Extended Grinder	51
407GH	Horizontal Grinder	40

Model Listing	Description	Page
407GT	Die Grinder	60 & 61
407RA	Right Angle Sander/Polisher	30
4101RA	Right Angle Sander/Polisher	34
410RA	Right Angle Grinder	22
410RAE	Right Angle Grinder	23
420RA	Right Angle Grinder	18, 25 & 33
4520RA	Right Angle Sander/Polisher	35
4620RA	Right Angle Sander/Polisher	35
4620RA(X)M	Right Angle Sander/Polisher	36
500D2M	Inline Drill	67
500FD1M	Floor Drill	69
500H1M	Power Supply Motor	81
500H2M	Power Supply Motor	81
500H3M	Power Supply Motor	81
507H	Horizontal Grinder	40, 42, 43 & 45
520H	Horizontal Grinder	41 & 43
520H1M	Power Supply Motor	81
520H2M	Power Supply Motor	81
520H3M	Power Supply Motor	81
520HGEH	Extended Grinder	52
520RA	Right Angle Grinder	19 & 35
520V	Vertical Grinder	7, 9 & 12
54V	Vertical Grinder	7
56H	Horizontal Grinder	41
56PC	Pile Cutter	11
56S	Vertical Sander	12
58C	Vertical Grinder	9
64V	Vertical Grinder	8
65H	Horizontal Grinder	41
65HGEH	Extended Grinder	53
65NEH	Extended Grinder	54
65VBW	Abrasice Cutting Machine	72
662VBW	Abrasice Cutting Machine	72
664	Power Supply Motor	82
66PC	Pile Cutter	11
66VBG	Bench Grinder	71
68C	Vertical Grinder	10
711C	Vertical Grinder	10
727V	Vertical Grinder	8
80-SERIES	Chipping Hammer	77
TC-1	Scaler	75, 76
TC-182	Scaler	75, 76
TC-183	Chipping Hammer	77



Made in USA

**Quality tools that perform
and last, designed and built
to meet our Customer's needs.**

Top Cat air tools are designed and built at our facilities in northeast Ohio, U.S.A. We utilize the most modern design and manufacturing techniques and equipment to provide our experienced builders with the parts needed for YOUR top quality tools. Air tools that are built for hard work, long life and safe operation.

We offer our customers a solid commitment of technical support before and after the sale. We use our 50 plus years of experience to help you select the proper tool and tool set up to meet your application needs. Our customer/technical service professionals are always ready to answer questions about our tools and share knowledge that may help in your selection of Top Cat Tools.

From our facility or at yours, we offer tool seminars/demonstrations of proper and safe tool use and repair clinics. Clinics where customers learn the real value of genuine Top Cat replacement parts.

Can't find the right tool?

Have a unique application?

Check with us.

For over 50 years we have modified existing tool designs, designed/built specialty tools to meet your needs, and in each case provided quality tools that perform, offer versatility and stay in service for a long time.

The T.C. Pride

T.C. Service has a growing worldwide network of quality Authorized Agents that provide the total package, sales, service and repair.

Our joint goal is to provide you, our customers, with the best American made pneumatic tools for the required job. These tools are Top Cat quality, delivered quickly at a competitive price. Our Authorized Agents know our tools and they can offer the kind of customer service you deserve.

We strive to keep our Authorized Agents aware of our continued ergonomic advancements, so that they can make tool selection recommendations. Technical assistance is always available. Our Authorized Agents work with us to address any special tool needs you may encounter.

To order, contact your local T.C. Service, Top Cat Authorized Agent or call us for the Agent nearest you.



T.C. Service Co.

38285 Pelton Road • Willoughby, Ohio 44094 U.S.A.

Phone: (440) 954-7500 • (800) 321-6876

Fax: (440) 954-7118 • (877) 800-3589

Visit our web site: www.tcservice.com

E-Mail: sales@tcservice.com

© 2013 T.C. Service Co., all rights reserved