





PEOPLE. PASSION. PERFORMANCE.

At CP, our mission is to provide our customers with sustainable added value solutions which optimize performance, maximize efficiency and ensure operator satisfaction.

With a dedicated product portfolio and a robust network of partners & authorized distributors, we aim to deliver best-in-class global service and local support to automotive service professionals.

Drawing from decades of experience and expertise in Vehicle Service, we have embarked on a transformational journey to provide you with value-added solutions developed in-house by our R&D team.

Ergonomics, safety and reliability are the cornerstones of our product development. Our industrial tools are designed and tested to be durable and more and more sustainable, ensuring ease of use and maximum productivity.

We are pleased to present this new version of our catalogue. It will provide you with a comprehensive view of our Vehicle Service tools and solutions, reflecting our ongoing commitment to excellence and innovations.

Discover how CP can enhance your operations with our cutting-edge products and services.

"

It's simple, really. You have work to do, and customers to serve. CP is there to help you get the job done, without compromise.













At CP, our goal is to provide best-in-class global service and local support to automotive professionals for General Mechanics, Tire Shops and Body shops applications.

A COMPLETE VEHICLE SERVICE OFFER WITH A FOCUS ON TIRE SHOPS

You can rely on our knowledge, our tools, our equipment and our expert recommendation to make sure you are safe at all times when changing your tires.

CP's dedication to the automotive industry spans decades. Benefits from our expertise, from factory to field, through certified quality testing and training, we develop products for you. With CP8609 series (page 42) and CP8854 series (page 54), combined with the application CPlinQ, CP is starting its transformation to enter a new age.

What does it mean? CP is going to provide high added value solutions in terms of:

- Extended Mobility & precision with cordless tools
- Process Control with bolting errors tracking & bolt counting
- Traceability with data collection & reporting.

By following and choosing the appropriate solutions, you will ensure that you will have the best performing tools for your Tire Shops applications therefore making your job faster and easier, increasing your productivity.

At every step of the way, we are there for you to provide One-Stop-Shop equipment, tools and accessories for, your day-to-day tire changing jobs.

From lifting the vehicle to untightening and tightening, we offer a full range of solutions to equip your shop. We understand the specific needs of maintaining and repairing 2 wheelers, cars and truck fleets. CP helps make tough jobs easier.



SPARESANDACCESSORIES

Original CP parts and genuine accessories are available for your CP tools. Follow this logo to find the dedicated spare kit and accessories selection listed at the end of each produc section.

MARKET SEGMENT



General Mechanics



Body Shops



Tire Shops



Metal Fabrication

OTHER




S2S Technology is the market's most convenient one handed impact wrench design. The operator can change between forward & reverse with one hand in any position.

There is less stress/fatigue on operator's wrist and arm when changing between forward & reverse.

CATALOG GUIDE

This catalog is available in printing version and also in digital pdf version.

For both versions you have access to digital links by scanning the QR codes in the printing version and clicking the pictures/icons in the digital one.

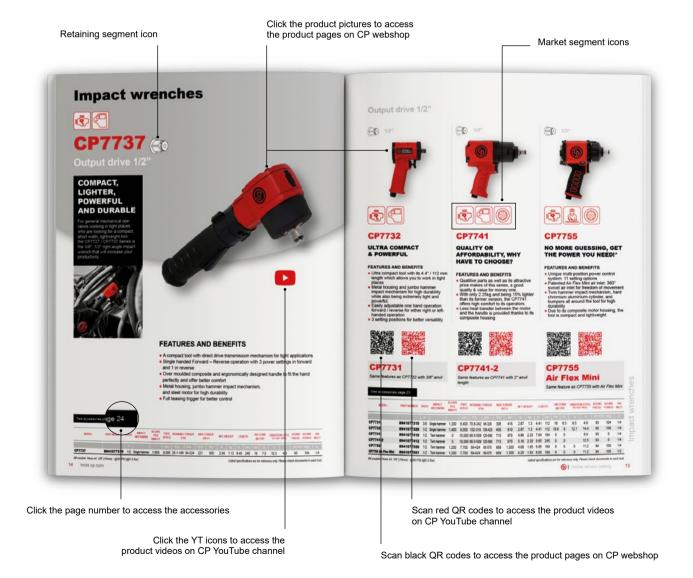



| IMPACT & RATCHET WRENCHES ACCESSORIES & KITS P. 25 AND P. 29 | 11 |
|--|-----|
| TORQUE WRENCHES ACCESSORIES P. 52 | 35 |
| SCREWDRIVERS ACCESSORIES P. 58 | 54 |
| GRINDERS ACCESSORIES P. 70 | 59 |
| SANDERS ACCESSORIES P. 85 | 75 |
| PERCUSSIVE TOOLS ACCESSORIES P. 92 | 87 |
| DRILLS ACCESSORIES P. 99 | 95 |
| SPECIALTY TOOLS ACCESSORIES P. 110 | 101 |
| CLASSIC TOOLS ACCESSORIES P. 119 | 111 |
| WORKSHOP EQUIPMENT ACCESSORIES P. 131 | 121 |
| AIR LINE NETWORK HOSES, COUPLINGS, LUBRICATION, BALANCERS | 133 |
| SAFETY INSTRUCTIONS - INDEX - CONVERSION TABLE | 150 |

Our commitment to Sustainability

"Countries, Citizens & Companies have a shared responsibility towards Sustainability. As a responsible Industrial player, we take our Corporate Social Responsibilty seriously, quided by the Sustainable Development Goals from the United Nations.

We strive to conduct our business in an ethical, environmental, and humane manner. We are now setting even more ambitious targets and taking actions accordingly.

Sustainability is at the core of our approach and influences our decisions at every level.

To evaluate our activities and demonstrate our commitment to sustainability, we rely on external Environmental, Social and Governance (ESG) assessment platforms, such as **EcoVadis**. This enables us to challenge our targets and the way we do things."





Sustainability 2024 Achievements **& 2025 Targets**

Environment











2024: 92,8% of reused, recycled or recovered waste**. 2025 target: 100%

-28%

CO² emissions scope 3 by 2030*.

CO² emissions **scope 1 & 2** by 2030°.

100% of new or redesigned products benefit from a Product Carbon Footprint calculation.

People & Culture









26%

of women in our workplace in 2024**

By 2030, our target is to reach a minimum of 30% women in our workforce*.

Ethics & Transparency







100%

of our employees worldwide have been trained on our Code of Conduct and have signed a compliance agreement in 2024.

2024: 34% of our suppliers have been evaluated by EcoVadis.

2025 target: 35%**

Most of our CO_2 emissions comes from **Scope 3 Downstream**, when our products are **in-use phase**. Our Research & Development teams are working on 3 major levers to reduce CO_2 emissions:



Electric-powered products



Energy-efficient products during usage



Customer usage optimization

Since January 2021, the CO₂ impact of any new product is measured through a **Product Carbon Footprint** (**PCF**) based on ISO 14067:2018 standard. This measure enables us to improve tool efficiency along the product development process and to provide product recommendations to our customers.

Discover our Product Environmental Card



Do you want to know more on all our activities & commitment to Sustainability?



tools.cp.com/en/ about/Sustainability

Packaging

In 2024, we challenged CP Tools packaging.

Most of our outer carton were made with the use of

many colors and glossy finish.

We decided to use as of now a minimalist approach using only black ink on raw cardboard.





Find the Right Tool in Just a Few Clicks

Try out our selectors and configurators!

Whether you're looking for the perfect air motor, the ideal grinder, or the best air line setup, our smart selectors and configurators are here to help.

Designed for professionals, these tools guide you to the most suitable solution based on your specific needs and working conditions.

Assembly Tool selector


Choose the best assembly tool for your production needs with our Assembly Tool Selector. Define your torque, speed, and workflow requirements for consistent and reliable assembly operations. Begin by outlining your application needs:

- Screwdrivers
- Precision Fastening
- Loosening-Breaking
- Fastening & Torque Limited

Grinder selector

Discover the ideal industrial grinder for your needs with our Grinder Selector Tool! Whether you need an industrial, super industrial, or general maintenance model, our tool helps you identify the best fit. Simply follow these various application criteria to streamline your operations and enhance productivity:

- Disc type: depressed-center wheel, straight cut-off wheel, straight cup wheel, flaring cup wheel, flap disc
- Disc size: from 100 mm to 230 mm
- Tool shape: angle, straight, or vertical
- Spindle type: Hex or M14

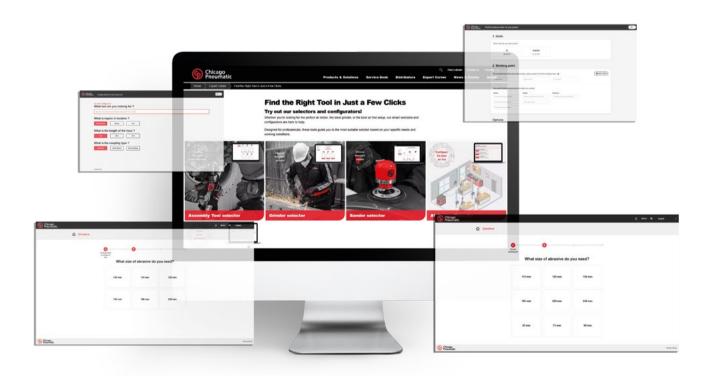

Sander selector

Find the right sander for a flawless finish! Select your tool based on surface type, material, and application. Answer these questions to make your ideal selection. Our selector guides you to the ideal sander for precision, comfort, and efficiency:

- Which abrasives do you typically use?
- What size of abrasive do you need?
- What tool configuration do you prefer?
- What orbit size do you require?

Airline configurator

Optimize your air line setup with our Airline Configurator. It helps you select the right tool and ensures efficient air network management. Start by considering these key factors:

- What tool are you looking for?
- What is the region in location?
- What is the length of the hose?
- What is the coupling type?

Air Motor selector

Selecting an air motor is now easier than ever with our Air Motor Selector tool. It saves you time and minimizes the risk of errors. Here's how you can make a quick and easy selection:

- Select your unit system
- Identify the working point by entering your working parameters
- Specify your preferences for shaft type, raw material, and rotation direction
- Discover our pre-selection and check the curves and dimensional aspects

Find the Right Tool in Just a Few Clicks!



" At CP we are dedicated to making our customers' jobs as easy as possible. With many models available, it can sometimes be daunting knowing where to start when choosing a tool, but with our new online site, engineers can now make their selection process even easier."

Adrien Chartrel, Global Marketing Manager, Chicago Pneumatic

What we offer

When you choose CP power tools for professional and industrial applications, you buy into a legacy of trust, durability and operator comfort, thanks to our commitment to performance, material, aesthetics, efficiency, and convenience.

We work towards delivering best-in-class customer value

- Products: reliable, ergonomic, safe, robust, easy-touse
- Service: best-in-class support with fast local service
- Expertise: expert advice based on decades of experience, backed by quality testing and training
- Pricing: value for money
- Parts: original spare parts and services
- Availability: fast and easy delivery through a dedicated global production and distribution network

Engineered to excel

Not only are our products engineered to excel, they are also designed for safe operations. At CP, our goal is to deliver best-in-class global service and local support to our industrial, construction and infrastructure customers through a dedicated product portfolio and a strong network of authorized distributors.

Our products are known for their reliability, ergonomics, safety, robustness and ease-of-use and we ensure a reliable supply of original spare parts through our logistics network, and responsive service.

Dedicated eCommerce platform

With CP Webshop you can place and track your orders for tools, parts and accessories, anytime and anywhere! Our eCommerce platform provides our customers with rich product content and an easy-to-use order and checkout process.

Benefits of the Webshop



- A fast and easy-to-use eCommerce platform
- 24/7 order placement with real-time order and tracking status
- Enhanced product information with technical data/ specification, and related accessories and spare parts
- Easily accessible product images and related documents
- Ease of upselling/cross-selling



IMPACT & RATCHET WRENCHES



How to select your tool

Application

- Materials
- Joint types
- Bolt Ø & Grade
- Dutv

Sockets

- Types
- Size
- Access

Tools

- Handle type
- Clutch types
- Square drive & sockets retainer
- Torque

1. Handle type







D-Handle (D)

2. Clutch type



CLUTCH

Benefits

- Compact clutch
- Lighter than the twin hammer version
- Excellent for Maintenance and Repair Operations (MRO)



Benefits

- High energy per blow
- Verv durable clutch
- Excellent for hard joints
- All around clutch with a high power/weight ratio

better operator comfort

Benefits

■ Excellent on hard joints with a good power/weight ratio

■ Extremely low vibration clutch for



ROCKING DOG CLUTCH

(pinless or double)



THE 2-JAW CLUTCH

Best choice for tough duty!

Durable & Easy maintenance operation

Thanks to only two main moving parts

Efficient

Thanks to the heavy cage blow efficiency, this clutch is well performing even with limited airflow.

Symmetric

SINGLE

DOG

The hammer is round and closed to avoid lateral vibrations.

Versatile & Comfortable

Efficient for all type of joints, the 2-Jaw clutch is one of the quietest technology improving dramatically operator's comfort.

3. Square drive & socket retainer

You will find on the market a wide selection of socket retainers, from the simple friction ring retention to dual retention and spline configurations for maximum power transfer and safety.

VERSATILITY



Quick Change for screwdriver bits or bits sockets



Friction Ring for rapid socket change



Dual (Hole + Friction) for versatility



Pin Retainer for dedicated applications




Hole for pin o-ring type retention

SAFETY



Integral Spline with integral push button retainer. Maximize torque transfer and socket life

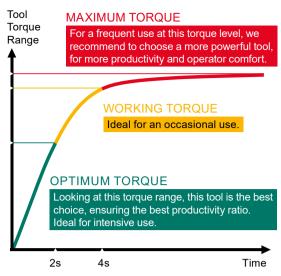

This table will help you to choose the right impact mechanism

| | | Joint as | sembly | |
|---|--------------|----------|----------|-----------|
| Type of Clutches | Very hard | Hard | Soft | Very soft |
| Pin clutch | V | ~ | V | × |
| Single dog clutch | V | ~ | ~ | × |
| Twin Hammer clutch (Double dog clutch) | ~ | ~ | ~ | × |
| Rocking dog clutch | V | ~ | ~ | ~ |
| 2-Jaw clutch | ~ | ~ | ~ | V |

Ultimate / Good / Possible / Not suitable

Learn how to differentiate soft and hard joint


Soft or hard joint designate the nature of the junction of the two surfaces that are assembled or disassembled.

SOFT JOINT

Low resistance to turning until the bolt (or nut) reaches its seating, after which resistance slowly increases.

A joint in which the plates and material between the nut and bolt bearing surfaces have a low stiffness when subjected to compression by the bolt load.

Often the placement of a gasket in a joint results in a soft joint.

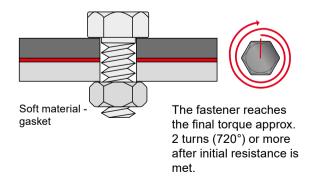


VERY SOFT JOINT

HARD JOINT

Low resistance to turning until the bolt (or nut) reaches its seating, after which resistance rapidly increases.

A joint in which the plates and material between the nut and bolt bearing surfaces have a high stiffness when subjected to compression by the bolt load.

Metal to metal results in a hard joint.

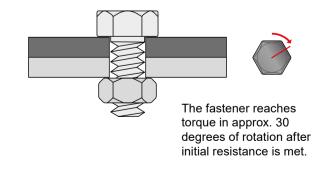

VERY HARD JOINT

Rubber Wood Metal to gasket Metal

Output drive 3/8"- 1/2"













CP721

COMFORT & DURABILITY

FEATURES AND BENEFITS

- The metal motor housing with rocking dog impact mechanism guarantees smooth operation and a high durability
- A compact tool allowing easy access in tight applications
- A comfortable tool with built-in power regulator and ergonomic handle





CP7722

3/8"

COMPACT FOR EASIER ACCESS

FEATURES AND BENEFITS

- Metal housing and double rocking dog impact mechanism for high durability
 Power regulator at the back (4 power
- settings) and butterfly shift for forward / reverse for improved ergonomics





CP7739

SIDE2SIDE: REVERSE TECHNOLOGY FOR BALANCE & POWER

FEATURES AND BENEFITS

- Lightweight composite housing, twin hammer impact mechanism, and magnesium clutch housing for high durability
- Side-2-Śide reverse / forward technology with 3 positive power settings to maximise operator comfort

CP7729

Same features as CP7739 with 3/8" output drive

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | ORQUE (FW) | MAX TO | ORQUE EV) | NET W | EIGHT | LEN | GTH | | CONS | | ON LEVEL 27 (M/S2) | | SOUND POWER | |
|--------|-------------|-------|--------------------|---------------|------------|------------|--------|--------------|-------|-------|------|-----|-----|------|-----|-----------------------|----------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 44 - dB(A) | in. |
| CP721 | T021963 | 3/8 | Rocking dog | 11,000 | 5.2-50.2 | 7-68 | 75.2 | 102 | 2.65 | 1.2 | 5.75 | 146 | 10 | 4.7 | 4.7 | 3.3 | 87 | 98 | 1/4 |
| CP7722 | 8941077220 | 3/8 | Rocking dog | 9,500 | 5.2-64.9 | 7-88 | 90 | 122 | 2.2 | 1 | 6.3 | 160 | 10 | 4.7 | 4 | 1.4 | 97 | 108 | 1/4 |
| CP7739 | 8941077390 | 1/2 | Twin hammer | 9,900 | 50.2-305 | 68-414 | 450 | 450 | 2.65 | 1.2 | 6.42 | 163 | 20 | 9.4 | 6.9 | 2.5 | 92 | 103 | 1/4 |
| CP7729 | 8941077290 | 3/8 | Twin hammer | 9,400 | 50.2-300 | 68-407 | 415 | 563 | 2.76 | 1.25 | 6.42 | 163 | 20 | 9.4 | 6.4 | 1.9 | 91 | 102 | 1/4 |





CP7732C



Output drive 1/2"

ULTRA COMPACT & POWERFUL Ultra-lightweight and ultra-com-

pact, the 1/2" CP7731C / CP7732C series is the stubby impact wrench that allows you to work in tight places with ease while being powerful with its high reverse torque.





Same feature as CP7732C with 3/8" anvil



FEATURES AND BENEFITS

- Ultra compact tool with its 4.3" / 108 mm length allowing for work in tight places
- · Composite housing, jumbo hammer impact mechanism, and steel motor for high durability while also being very light and powerful
- Easily adjustable one hand operation forward / reverse (side2side selector) with 2 positions in reverse (max and low torque)
- Curved handle with Thermoplastic injected rubber for better handling
- · Composite ultra-lightweight housing

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | ORQUE (FW) | MAX T (R | ORQUE EV) | NET WI | EIGHT | LEN | GTH | AIR (| CONS | VIBRATIO ISO 2892 | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|---------|-------------|-------|--------------------|---------------|------------|------------|-------------|--------------|--------|-------|------|-----|-------|------|----------------------|-----------------------|-----------------|----------------|--------------|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP7731C | 8941077311 | 3/8 | Single hammer | 9,000 | 61.2-289 | 83-392 | 346 | 469 | 2.2 | 1 | 4.33 | 110 | 16.7 | 7.9 | 10.33 | 1.4 | 96 | 107 | 1/4 |
| CP7732C | 8941077321 | 1/2 | Single hammer | 9,410 | 51.6-285 | 70-387 | 461 | 625 | 2.2 | 1 | 4.25 | 108 | 7.5 | 10.2 | 10.8 | 1.4 | 95.5 | 106.5 | 1/4 |





CP7737

Output drive 1/2"

COMPACT, LIGHTER, POWERFUL AND DURABLE

For general mechanical operators working in tight places who are looking for a compact, short width, lightweight tool, the CP7727 / CP7737 Series is the 3/8", 1/2" right angle impact wrench that will increase your productivity.





FEATURES AND BENEFITS

- A compact tool with direct drive transmission mechanism for tight applications
- Single handed Forward Reverse operation with 3 power settings in forward and 1 in reverse
- Over moulded composite and ergonomically designed handle to fit the hand perfectly and offer better comfort
- Metal housing, jumbo hammer impact mechanism, and steel motor for high durability
- Full teasing trigger for better control

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | DRQUE (FW) | MAX TO | ORQUE EV) | NET W | EIGHT | LEN | GTH | AIR C | CONS | VIBRATIO ISO 2892 | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|-------|--------------------|---------------|------------|------------|--------|--------------|-------|-------|------|-----|-------|------|----------------------|-----------------------|-----------------|----------------|--------------|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 44 - dB(A) | in. |
| CP7737 | 8941077370 | 3/8 | Single hammer | 9,000 | 25.1-165 | 34-224 | 221 | 300 | 2.49 | 1.13 | 9.45 | 240 | 16 | 7.5 | 10.3 | 1.3 | 93 | 104 | 1/4 |







CP7732

ULTRA COMPACT & POWERFUL

FEATURES AND BENEFITS

- Ultra compact tool with its 4.4" / 112 mm length which allows you to work in tight
- Metal housing and jumbo hammer impact mechanism for high durability while also being extremely light and powerful.
- Easily adjustable one hand operation forward / reverse for either right or lefthanded operation
- 3 setting positions for better versatility





1/2"









CP7741

QUALITY OR AFFORDABILITY, WHY **HAVE TO CHOOSE?**

FEATURES AND BENEFITS

- Qualitive parts as well as its attractive price makes of this series, a good quality & value for money one.
- With only 2.25kg and being 15% lighter than its former version, the CP7741 offers high comfort to its operators.
- Less heat transfer between the motor and the handle is provided thanks to its composite housing









CP7755

NO MORE GUESSING, GET THE POWER YOU NEED!*

FEATURES AND BENEFITS

- Unique multi-position power control system: 11 setting options
- Patented Air Flex Mini air inlet: 360° swivel air inlet for freedom of movement
- Twin hammer impact mechanism, hard chromium aluminium cylinder, and bumpers all around the tool for high durability
- Due to its composite motor housing, the tool is compact and lightweight
- * Final torque must be applied manually using a calibrated torque wrench (please refer to the operator's manual)



CP7731

Same features as CP7732 with 3/8" anvil

CP7741-2

Same features as CP7741 with 2" anvil length

CP7755 Air Flex Mini

Same feature as CP7755 with Air Flex Mini

See accessories page 25

| MODEL | PART NUMBER | DRIVE | IMPACT FI | REE | WORKING TO | ORQUE (FW) | | ORQUE | NET W | EIGHT | LEN | GTH | AIR C | | VIBRATIO | | | SOUND | |
|----------------------|-------------|-------|------------------|-------|------------|--|-------|-------|-------|-------|------|-----|-------|-----|----------|-----------|---------|------------|------|
| | | | MECANISM SP | PEED | | (* * * * * * * * * * * * * * * * * * * | (R | EV) | | | | | @L0 | DAD | ISO 2892 | ?7 (M/S2) | PRESS. | POWER | INLE |
| | | in. | r | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 157 | 44 - dB(A) | in. |
| CP7731 | 8941077310 | 3/8 | Single hammer 6, | ,400 | 70.8-242 | 96-328 | 306 | 415 | 2.87 | 1.3 | 4.41 | 112 | 18 | 8.3 | 8.5 | 1.5 | 93 | 104 | 1/4 |
| CP7732 | 8941077320 | 1/2 | Single hammer 9, | ,000 | 102-310 | 138-420 | 450 | 610 | 2.87 | 1.3 | 4.41 | 112 | 19.6 | 9 | 12.1 | 4.4 | 95 | 106 | 1/4 |
| CP7741 | 8941077410 | 1/2 | Twin hammer 10 | 0,000 | 88.5-509 | 120-690 | 715 | 970 | 4.96 | 2.25 | 7.64 | 194 | - | - | 8.5 | 2.7 | 93 | 104 | 1/4 |
| CP7741-2 | 8941077412 | 1/2 | Twin hammer 10 | 0,000 | 88.5-509 | 120-690 | 715 | 970 | 5.18 | 2.35 | 9.65 | 245 | - | | 9.4 | 3.8 | 93 | 104 | 1/4 |
| CP7755 | 8941077550 | 1/2 | Twin hammer 7, | ,700 | 59-424 | 80-575 | 959 | 1,300 | 4.08 | 1.85 | 6.65 | 169 | - | - | 8.5 | 3.4 | 94 | 105 | 1/4 |
| CP7755 Air Flex Mini | 8941077551 | 1/2 | Twin hammer 7, | ,700 | 59-424 | 80-575 | 959 | 1,300 | 4.25 | 1.93 | 6.65 | 169 | - | - | 8.5 | 3.4 | 94 | 105 | 1/2 |

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.







CP7748



Output drive 1/2"

POWER, **COMFORT & DURABILITYIN YOUR HANDS!**

Due to its powerful torque and unique ring system (forward/ reverse and power control) the CP7748 series 1/2" impact wrench is efficient and easy to use for all maintenance and tire changing applications.nn





Same features as CP7748 with 2" anvil length



FEATURES AND BENEFITS

- 960 ft.lbs / 1,300 Nm of max torque in reverse position for high productivity
- Composite housing, twin hammer impact mechanism, hard anodized end plates, and hard chromium aluminum cylinder for high durability
- Lightweight (4.65 lbs 2.11 kg) and compact (8.86 in. / 225 mm long) for improved comfort
- One-hand reverse system (Ring system) for better ergonomics
- Curved rubber handle to help prevent slipping

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | ORQUE (FW) | MAX T (R | ORQUE EV) | NET W | EIGHT | LEN | GTH | AIR (| CONS | VIBRATIO ISO 2892 | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|----------|-------------|-------|--------------------|---------------|------------|------------|-------------|--------------|-------|-------|------|-----|-------|------|----------------------|-----------------------|-----------------|----------------|--------------|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP7748 | 8941077481 | 1/2 | Twin hammer | 7,000 | 70.1-553 | 95-750 | 959 | 1,300 | 4.41 | 2 | 6.89 | 175 | 25 | 12 | 12 | 4.5 | 94.3 | 105.3 | 1/4 |
| CP7748-2 | 8941077486 | 1/2 | Twin hammer | 7,000 | 70.1-553 | 95-750 | 959 | 1,300 | 4.65 | 2.11 | 8.86 | 225 | 25 | 12 | 11.3 | 3.8 | 94.3 | 105.3 | 1/4 |



CP7748TL

Output drive1/2"



Only marketed in the USA & Canada

CP7748TL-2

Same feature as CP7748TL with 6" anvil length



FEATURES AND BENEFITS

ERGONOMIC

- One-hand reverse system
- (New reverse/ forward system)
- RING system

LIGHTWEIGHT

- Composite motor housing
- 4.4 lbs 2.0 kg
- HIGH MANEUVERABILITY
- 360° swivel air inlet

DURABLE

- Hard anodized end plates
- Hard chromium aluminum cylinder
- Twin hammer mechanism

COMFORTABLE

- Curved handle with rubber material
- Resistant to most chemicals used in workshops

MORE SECURED

• Friction ring socket retainer

* Final torque must be applied manually using a calibrated torque wrench (please refer to the operator's manual)

| Se | e accessorie | s page 25 |
|----|--------------|-----------|
| | | |
| | | |

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | DRQUE (FW) | MAX T (R | ORQUE EV) | NET W | EIGHT | LEN | GTH | | CONS | VIBRATIO ISO 2893 | | | SOUND POWER | |
|------------|-------------|-------|--------------------|---------------|------------|------------|-------------|--------------|-------|-------|------|-----|-----|------|----------------------|-----|---------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 157 | 14 - dB(A) | in. |
| CP7748TL-2 | 8941077485 | 1/2 | Twin hammer | 8,200 | 66.4 | 90 | 103 | 140 | 5.29 | 2.4 | 9.84 | 250 | 22 | 10 | 4.8 | 1.5 | 86 | 97 | 1/4 |
| CP7748TL | 8941077484 | 1/2 | Twin hammer | 8,200 | 66.4 | 90 | 103 | 140 | 4.85 | 2.2 | 7.87 | 200 | 22 | 10 | 4.8 | 1.5 | 86 | 97 | 1/4 |







CP7769



Output drive 3/4"

POWERFUL, LIGHTWEIGHT & COMPACT

With all controls within reach, the CP7769 series 3/4", 1" impact wrench makes it possible for all operators working in the field of maintenance applications to toggle between forward & reverse and adjust the power with one hand.



CP7769-6

Same feature as CP7769 with 6" anvil length



FEATURES AND BENEFITS

- 1,440 ft.lbs (1,950 Nm) of max torque in reverse position for high productivity
- · Composite housing and twin hammer impact mechanism for high durability
- Due to its composite motor housing, it is both lightweight and compact, offering improved comfort.
- One-hand power adjustment and reverse system S2S technology thereby limiting wrist and arm fatigue.

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING T | ORQUE (FW) | MAX T | ORQUE EV) | NET W | EIGHT | LEN | GTH | | CONS OAD | VIBRATIO ISO 2892 | | | SOUND POWER | |
|----------|-------------|-------|--------------------|---------------|-----------|------------|-------|--------------|-------|-------|-------|-----|-----|-------------|----------------------|-----|----------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP7769 | 8941077691 | 3/4 | Twin hammer | 6,500 | 300-1,080 | 407-1,460 | 1,440 | 1,950 | 6.94 | 3.15 | 7.87 | 200 | 31 | 14.7 | 12.97 | 1.5 | 96.8 | 107.8 | 3/8 |
| CP7769-6 | 8941077697 | 3/4 | Twin hammer | 6,500 | 300-1,080 | 407-1,460 | 1,440 | 1,950 | 8.27 | 3.75 | 13.78 | 350 | 31 | 14.7 | 12.97 | 1.5 | 96.8 | 107.8 | 3/8 |







CP7762

ULTRA COMPACT, LIGHTWEIGHT AND POWERFUL

FEATURES AND BENEFITS

- Ultra compact and lightweight tool to lower operator fatigue while working in restricting spaces.
- 1,050 ft.lbs / 1,420 Nm of max torque in reverse position for high productivity
- Metal housing, twin hammer impact mechanism, and steel motor for high durability
- One hand Forward & Reverse speed regulator button and full teasing trigger for improved ergonomics













CP7630

POWERFUL AND VERSATILE

FEATURES AND BENEFITS

- Metal motor housing with twin hammer impact mechanism for high performance
- Well-balanced and comfortable due to a design which minimises wrist strain

Not marketed in the USA & Canada



3/4"









CP7763

COMPACT & POWERFUL

FEATURES AND BENEFITS

- Composite housing and twin hammer impact mechanism for high durability
- A lightweight and compact tool in a composite motor housing that offers greater comfort
- Equipped with intuitive Forward / Reverse lever for easy operation
- Power regulator for a controlled approach



CP7763-6

Same feature as CP7763 with 6" anvil length

See accessories page 25

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING T | ORQUE (FW) | MAX T | ORQUE EV) | NET W | EIGHT | LEN | GTH | | CONS | | ON LEVEL 27 (M/S2) | | SOUND POWER | |
|----------|-------------|-------|--------------------|---------------|-----------|------------|-------|--------------|-------|-------|------|-----|------|------|------|-----------------------|----------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7762 | 8941077620 | 3/4 | Twin hammer | 4,850 | 148-664 | 201-900 | 1,050 | 1,420 | 6.39 | 2.9 | 6.22 | 158 | 24.7 | 16.4 | 10.7 | 2.8 | 92.8 | 103.8 | 3/8 |
| CP7630 | 8941076300 | 3/4 | Twin hammer | 6,900 | 131-809 | 177-1,090 | 1,110 | 1,500 | 10.5 | 4.8 | 9.45 | 240 | 21 | 9.6 | 9.8 | 3 | 105.3 | 116.3 | 3/8 |
| CP7763 | 8941077630 | 3/4 | Twin hammer | 6,300 | 100-950 | 136-1,280 | 1,200 | 1,630 | 11.5 | 5.25 | 9.02 | 229 | 24.7 | 16.4 | 10.4 | 4.2 | 96 | 107 | 3/8 |
| CP7763-6 | 8941077636 | 3/4 | Twin hammer | 6,300 | 100-950 | 136-1,280 | 1,200 | 1,630 | 13.8 | 6.28 | 15 | 381 | 24.7 | 16.4 | 10.4 | 4.2 | 96 | 107 | 3/8 |

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

21

Output drive 3/4" - 1"



3/4'











CP7763D-6

COMPACT & POWERFUL

FEATURES AND BENEFITS

- Composite housing and twin hammer impact mechanism for high durability
- A lightweight and compact tool in a composite motor housing that offers greater comfort
- Equipped with intuitive Forward / Reverse lever for easy operation
- Power regulator for a controlled approach







CP7773

COMPACT & POWERFUL

FEATURES AND BENEFITS

- Composite housing and twin hammer impact mechanism for high durability
- A lightweight and compact tool in a composite motor housing that offers greater comfort
- Equipped with intuitive Forward / Reverse lever for easy operation
- Power regulator for a controlled approach







CP7779

POWERFUL, LIGHTWEIGHT & COMPACT

FEATURES AND BENEFITS

- 1,440 ft.lbs (1,950 Nm) of max torque in reverse position for high productivity
- Composite housing and twin hammer impact mechanism for high durability
- Due to its composite motor housing, it is both lightweight and compact, offering improved comfort.
- One-hand power adjustment and reverse system - S2S technology thereby limiting wrist and arm fatigue.

CP7773D

Same as CP7763D-6 with 1 square drive

CP7773D-6

Same as CP7773D with 6" anvil length

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | DRQUE (FW) | | ORQUE EV) | NET WI | EIGHT | LEN | GTH | | CONS | VIBRATIO ISO 2892 | | | SOUND POWER | |
|-----------|-------------|-------|--------------------|---------------|------------|------------|-------|--------------|--------|-------|-------|-----|-----|------|----------------------|-----|----------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP7763D-6 | 8941077637 | 3/4 | Twin hammer | 6,600 | 251-1,070 | 340-1,450 | 1,300 | 1,760 | 16 | 7.3 | 17.52 | 445 | 41 | 19.3 | 12 | 3.3 | 98 | 109 | 1/2 |
| CP7773 | 8941077730 | 1 | Twin hammer | 6,300 | 100-950 | 136-1,280 | 1,200 | 1,630 | 12.1 | 5.5 | 9.21 | 234 | 30 | 14.2 | 10.4 | 4.2 | 96 | 107 | 3/8 |
| CP7773D | 8941077731 | 1 | Twin hammer | 6,600 | 251-1,070 | 340-1,450 | 1,300 | 1,760 | 14.5 | 6.6 | 11.42 | 290 | 4.1 | 19.3 | 12 | 3.3 | 98 | 109 | 1/2 |
| CP7773D-6 | 8941077737 | 1 | Twin hammer | 6,600 | 251-1,070 | 340-1,450 | 1,300 | 1,760 | 16.3 | 7.4 | 17.52 | 445 | 4.1 | 19.3 | 12 | 3.3 | 98 | 109 | 1/2 |
| CP7779 | 8941077791 | 1 | Twin hammer | 6,500 | 300-1,080 | 407-1,460 | 1,440 | 1,950 | 7.28 | 3.3 | 8.07 | 205 | 31 | 14.7 | 12.97 | 1.5 | 96.8 | 107.8 | 3/8 |









CP7776

HIGH TORQUE & COMFORT

FEATURES AND BENEFITS

- Metal housing and pinless closed reinforced rocking dog impact mechanism for high durability
- TPR handle and side handle swivel in 4 positions for maximum comfort
- Power control regulators at the back of the tool with 3 reverse and 3 forward positions
- Angled down exhaust blows air away from work place
- Rubber bumpers protect both applications & tool







CP796

POWERFUL & DURABLE

FEATURES AND BENEFITS

- Powerful motor delivering up to 2,000 ft.lbs (2,712Nm)
- Metal housing and 2 jaws impact mechanism for high durability
- Adjustable side handle for better

Only marketed in the USA & Canada













CP7783-6

LIGHTWEIGHT, POWERFUL AND SUPER DURABLE

FEATURES AND BENEFITS

- Lightweight tool for reduced operator
- 1,770 ft.lbs (2,400 Nm) max torque in reverse for high productivity
- Metal housing and pinless closed reinforced rocking dog impact mechanism for high durability
- Four positions for D-handle placement to provide ultimate operator comfort
- Top or down exhaust, quick and easy to change

CP7776-6

Same feature as CP7776 with 6" anvil length

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

CP7783

Same feature as CP7783-6 with short anvil

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING T | ORQUE (FW) | | ORQUE EV) | NET W | EIGHT | LEN | GTH | AIR C | CONS | VIBRATIO ISO 2892 | | | SOUND POWER | |
|----------|-------------|-------|---------------------|---------------|-----------|------------|-------|--------------|-------|-------|-------|-----|-------|------|----------------------|-----|----------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7776 | 8941077760 | 1 | Pinless rocking dog | 5,000 | 704-1,530 | 955-2,070 | 1,770 | 2,400 | 24.6 | 11.2 | 11.38 | 289 | 33 | 15.6 | 8.7 | 2.8 | 93 | 104 | 1/2 |
| CP7776-6 | 8941077766 | 1 | Pinless rocking dog | 5,000 | 705-1,530 | 956-2,070 | 1,770 | 2,400 | 27.7 | 12.6 | 17.6 | 447 | 33 | 15.6 | 8.7 | 2.8 | 93 | 104 | 1/2 |
| CP796 | T019799 | 1 | 2-jaws | 4,100 | 300-1,400 | 407-1,900 | 2,000 | 2,710 | 20 | 9.07 | 9.49 | 241 | 52 | 24.5 | 18.2 | 3.8 | 101 | 112 | 1/2 |
| CP7783 | 8941077830 | 1 | Pinless rocking dog | 6,200 | 413-1,250 | 560-1,700 | 1,770 | 2,400 | 18.5 | 8.4 | 13.78 | 350 | 40.4 | 19 | 15.1 | 4.1 | 102 | 113 | 1/2 |
| CP7783-6 | 8941077836 | 1 | Pinless rocking dog | 6,200 | 413-1,250 | 560-1,700 | 1,770 | 2,400 | 20.9 | 9.5 | 19.69 | 500 | 40.4 | 19 | 15.1 | 4.1 | 102 | 113 | 1/2 |

Output drive 1"













1"











P7782-6

HIGH TORQUE & COMFORT

FEATURES AND BENEFITS

- Metal housing and pinless closed reinforced rocking dog impact mechanism for high durability
- the unit with 3 reverse and 3 forward positions
- applications & tool
- Low vibration for improved comfort

- 1,920 ft.lbs (2,600 Nm) of max torque in reverse position for high productivity
- Power control regulators at the rear of
- Integrated protective cover on the clutch housing protects both

CP7782

Same feature as CP7782-6 with short anvil

CP7782-SP6

Same feature as CP7782-6 with spline socket retainer

P7782TL-6

TORQUE LIMITED IN

FEATURES AND BENEFITS

- Torque limited in forward (370 ft.lb/500 Nm)* to limit the risk of over tightening, max torque in reverse (1,920 ft.lbs/2,600 Nm)
- Metal housing and pinless closed reinforced rocking dog impact mechanism for high durability
- Regulator integrated in forward/reverse, knob with 3 positions, power setting in both directions for improved comfort in use
- Integrated protective cover
- Low vibration for improved operational comfort

FORWARD - NO MORE OVERTIGHTENING

- on the clutch housing protects both applications & tool
- * Final torque must be applied manually using a calibrated torque wrench (please refer to the operator's manual)



CP5000

MOST POWERFUL

FEATURES AND BENEFITS

- Outstanding operator productivity for high volume tire work on trucks, buses, and heavy equipment.
- Metal motor housing with rocking dog hammer mechanism for high durability
- Convenient reverse valve with 4-position power settings for ease of

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | FREE SPEED | WORKING TO | DRQUE (FW) | | ORQUE EV) | NET W | EIGHT | LEN | GTH | AIR (| CONS | | ON LEVEL 27 (M/S2) | | SOUND POWER | |
|------------|-------------|-----------|---------------------|---------------|------------|------------|-------|--------------|-------|-------|-------|-------|-------|------|-----|-----------------------|----------|----------------|-----|
| | | in. | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7782 | 8941077820 | 1 | Pinless rocking dog | 5,200 | 369-1,480 | 500-2,000 | 1,920 | 2,600 | 22.2 | 10.1 | 14.57 | 370 | 40.7 | 19.2 | 7.8 | 1.8 | 100 | 111 | 1/2 |
| CP7782-SP6 | 8941077821 | #5 Spline | Pinless rocking dog | 5,200 | 369-1,480 | 500-2,000 | 1,920 | 2,600 | 25.5 | 11.6 | 14.57 | 370 | 40.7 | 19.2 | 7.8 | 1.8 | 100 | 111 | 1/2 |
| CP7782-6 | 8941077826 | 1 | Pinless rocking dog | 5,200 | 369-1,480 | 500-2,000 | 1,920 | 2,600 | 25.5 | 11.6 | 20.47 | 520 | 40.7 | 19.2 | 7.8 | 1.8 | 100 | 111 | 1/2 |
| CP7782TL-6 | 8941077827 | 1 | Pinless rocking dog | 5,200 | 295-325 | 400-440 | 1,920 | 2,600 | 25.5 | 11.6 | 20.11 | 510.8 | 40.7 | 19.2 | 7.8 | 1.8 | 100 | 111 | 1/2 |
| CP5000 | T024585 | 1 | Pinless rocking dog | 3,700 | 177-2,070 | 240-2,800 | 2,500 | 3,390 | 35.7 | 16.2 | 22.52 | 572 | 52 | 25 | 8.5 | 2.6 | 103 | 114 | 1/2 |



Accessories Impact wrenches



| TOOL'S MODEL | TUNE UP KIT PART NUMBER | REPAIR KIT PART NUMBER |
|---------------------|----------------------------|---------------------------|
| CP5000 | CA148687 | |
| CP721 | CA118880 | |
| CP7721 | 8940173515 | |
| CP7729 | 8940168742 | |
| CP7732/CP7732C | 8940173823 | |
| CP7737 | 8940173935 | |
| CP7739 | 8940168743 | |
| CP7748/CP7748-2 | 8940169847 | |
| CP7748TL/CP7748TL-2 | 8940169810 | |
| CP7762 | 8940172440 | |
| CP7763 | 8940162925 | 8940162927 |
| CP7763-6 | 8940162925 | 8940162928 |
| CP7763D-6 | 8940173716 | |

| TOOL'S MODEL | TUNE UP KIT PART NUMBER | REPAIR KIT PART NUMBER |
|-----------------|----------------------------|---------------------------|
| CP7773 | 8940162926 | 8940162929 |
| CP7773-6 | 8940171687 | |
| CP7776 | 8940172027 | |
| CP7776-6 | 8940172027 | |
| CP7782 | 8940169847 | |
| CP7782-6 | 8940169847 | |
| CP7782-SP6 | 8940169847 | |
| CP7783/CP7783-6 | 8940173927 | |
| CP7722 | 8940164482 | |
| CP7741 | 8940176739 | |
| CP7755 | 8940176226 | |
| CP7769/CP7769-6 | 8940175808 | |
| CP7630 | 8940171521 | |



| | TOOL'S MODEL | ACCESSORY'S PART NUMB |
|-----------------|--------------|--------------------------|
| CP7729 | | 8940168830 |
| CP7732 | | 8940172290 |
| CP7739 | | 8940168830 |
| CP7748-2 | | 8940175618 |
| CP7763/CP7763-6 | | 8940167498 |
| CP7741 | | 2050559183 |
| CP7755 | | 8940176299 |



TOOL HOLDER

| TOOL'S MODEL | MAGNETIC TOOL HOLDER | PART NUMBER |
|--------------|-------------------------|-------------|
| CP9841 | Max load 15 kg (33 lbs) | 8940166664 |

Rachet wrenches

Output drive 1/4" - 3/8"



1/4"







CP9426

HIGH POWER AND ULTRA COMPACT

FEATURES AND BENEFITS

- High power (27 ft.lbs / 35 Nm) for better productivity
- Extremely compact tool (5.1" / 130 mm) that enables improved comfort and access in hard to reach places



1/4"





1/4"







CP825C

EXTREMELY COMPACT

FEATURES AND BENEFITS

LENGTH

WITH ITS EXTENTED

 Extended length (7.75in / 197mm long) for ease of access in hard to reach places

LIGHTWEIGHT & HANDY

 Lightweight tool (1.13 lbs. / 0.51 kg) for improved comfort

FEATURES AND BENEFITS

- Comfortable ultra-compact (6.6 in/169mm long), lightweight (1.1 lbs/0.5 kg) tool that allows ease of access in hard-to-reach areas
- Aluminium body with insulating composite housing and head composite protective cover supplied with the tool
- Short and wide teasing lever to better adjust torque with 280 rpm
- Back exhaust avoids blowing dirt and dust
- New power easy-to-use regulator to regulate speed from zero to maximum

CP9427

Same feature as CP9426 with 3/8" square drive + Quick socket release

CP825CT

Same feature as CP825C with 3/8" square drive

| MODEL | PART NUMBER | DRIVE | FREE SPEED | MIN TO | ORQUE | MAX T | ORQUE | OVE LEN | | NET W | EIGHT | VIBRATION LEVEL | SOUND PRESS. | SOUND POWER | AIR C | | AIR INLET |
|---------|-------------|-------|------------|--------|-------|-------|-------|------------|-----|-------|-------|--------------------|-----------------|----------------|-------|-----|-----------|
| | | in. | rpm | ft.lb | Nm | ft.lb | Nm | in. | mm | lb | kg | (m/s²) | ISO 157- | 44 - dB(A) | cfm | l/s | in. |
| CP824 | T025390 | 1/4 | 220 | 3.7 | 5 | 12.5 | 17 | 7.76 | 197 | 1.12 | 0.51 | 4.1 | 91 | 102 | 15 | 7 | 1/4 |
| CP825C | 8941082511 | 1/4 | 280 | 3.7 | 5 | 18.4 | 25 | 6.65 | 169 | 1.1 | 0.5 | 4 | 82 | 93 | 11 | 5.1 | 1/4 |
| CP825CT | 8941082512 | 3/8 | 280 | 3.7 | 5 | 18.4 | 25 | 6.65 | 169 | 1.1 | 0.5 | 4 | 82 | 93 | 11 | 5.1 | 1/4 |
| CP9426 | 6151919426 | 1/4 | 270 | 5.2 | 7 | 25.8 | 35 | 5.04 | 128 | 1.08 | 0.49 | 5 | 82 | 93 | 12 | 5.6 | 1/4 |
| CP9427 | 6151919427 | 3/8 | 270 | 5.2 | 7 | 25.8 | 35 | 5.04 | 128 | 1.08 | 0.49 | 5 | 82 | 93 | 12 | 5.6 | 1/4 |







CP826

DURABILITY AND COMFORT

FEATURES AND BENEFITS

- A compact tool with polyurethane grip
- Teasing lever to better adjust the torque with 250 rpm
- High durability with an advanced head design that virtually eliminates slippage



CP825C

CP826T

Same feature as CP826 with 3/8" square drive

| MODEL | PART NUMBER | DRIVE | FREE SPEED | MIN TO | RQUE | MAX T | ORQUE | OVE | | NET W | EIGHT | VIBRATION LEVEL | | SOUND POWER | AIR (| CONS | AIR INLET |
|--------|-------------|-------|------------|--------|------|-------|-------|------|-----|-------|-------|--------------------|----------|----------------|-------|------|-----------|
| | | in. | rpm | ft.lb | Nm | ft.lb | Nm | in. | mm | lb | kg | (m/s²) | ISO 1574 | 44 - dB(A) | cfm | I/s | in. |
| CP826 | T025074 | 1/4 | 250 | 5.2 | 7 | 15.5 | 21 | 7.99 | 203 | 1.12 | 0.51 | 2.9 | 91 | 102 | 14 | 6.6 | 1/4 |
| CP826T | T025075 | 3/8 | 250 | 5.2 | 7 | 15.5 | 21 | 7.99 | 203 | 1.12 | 0.51 | 2.9 | 91 | 102 | 14 | 6.6 | 1/4 |

Rachet wrenches

Output drive 3/8"- 1/2"



3/8"



3/8"



1/4"

















CP7830Q

HIGH TORQUE AND DURABILITY FOR GENERAL MAINTENANCE

FEATURES AND BENEFITS

- Adjustable side exhaust and low noise for improved comfort
- Progressive teasing throttle to better adjust the torque
- Grease fitting on the reverse button for easier lubrication
- Sturdy aluminium alloy head and CP's patented TriSpring anti-slip head design with protective head cover for higher durability

CP7829

HIGH TORQUE AND COMPACTNESS

FEATURES AND BENEFITS

- Comfortable ultra-compact (6.6 in/169mm long), lightweight (1.1 lbs/0.5 kg) tool that allows ease of access in hard-to-reach areas
- Adjustable side exhaust avoids blowing dirt and dust
- Ergonomic composite grip insulates operators' hands from cold
- Teasing trigger to better adjust the torque with 225 rpm

CP886

HIGH TORQUE AND LOW PROFILE

FEATURES AND BENEFITS

- Compact head design for improved access in tight places
- Easy grip reverse for simple directional changes

also available page 111



CP7830HQ

Same feature as CP7830Q with 1/2" square drive

CP7829H

Same feature as CP7829 with 1/2" square drive

CP886H

Same feature as CP886 with 1/2" anvil

| MODEL | PART NUMBER | DRIVE | FREE SPEED | MIN TO | ORQUE | MAX T | ORQUE | OVE | | NET W | EIGHT | VIBRATION LEVEL | SOUND PRESS. | SOUND POWER | AIR (| CONS | AIR INLET |
|----------|-------------|-------|------------|--------|-------|-------|-------|-------|-----|-------|-------|--------------------|-----------------|----------------|-------|------|-----------|
| | | in. | rpm | ft.lb | Nm | ft.lb | Nm | in. | mm | lb | kg | (m/s²) | ISO 1574 | 4 - dB(A) | cfm | I/s | in. |
| CP7830Q | 8941078306 | 3/8 | 190 | 9.6 | 13 | 90 | 122 | 12.01 | 305 | 2.65 | 1.2 | 4.1 | 85 | 96 | 21 | 8.7 | 1/4 |
| CP7830HQ | 8941078308 | 1/2 | 190 | 9.6 | 13 | 90 | 122 | 12.01 | 305 | 2.65 | 1.2 | 4.1 | 85 | 96 | 21 | 8.7 | 1/4 |
| CP7829 | 8941078293 | 3/8 | 225 | 11.1 | 15 | 50.2 | 68 | 10.71 | 272 | 2.72 | 1.24 | 8.6 | 85 | 96 | 10.9 | 5.2 | 1/4 |
| CP7829H | 8941078294 | 1/2 | 225 | 11.1 | 15 | 54.6 | 74 | 10.71 | 272 | 2.73 | 1.24 | 8.6 | 85 | 96 | 10.9 | 5.2 | 1/4 |
| CP886 | T024240 | 3/8 | 160 | 9.6 | 13 | 50.2 | 68 | 10.24 | 260 | 2.62 | 1.19 | 3.7 | 99 | 110 | 17 | 8 | 1/4 |
| CP886H | T024391 | 1/2 | 160 | 9.6 | 13 | 50.2 | 68 | 10.24 | 260 | 2.62 | 1.19 | 3.7 | 99 | 110 | 17 | 8 | 1/4 |



Accessories Ratchet wrenches



| TOOL'S MODEL | TUNE UP KIT PART NUMBER | REPAIR KIT PART NUMBER |
|----------------|----------------------------|---------------------------|
| CP9426 | 2050527033 | 2050527043 |
| CP9427 | 2050527033 | 2050527053 |
| CP824 | CA157871 | CA157872 |
| CP825C/CP825CT | 8940175219 | 8940175217 |
| CP826 | CA155033 | CA155034 |
| CP826T | CA155033 | CA155035 |
| CP7830Q | 8940158552 | 8940158613 |
| CP7830HQ | 8940158552 | 8940158614 |
| CP7829 | 8940173666 | 8940173667 |
| CP7829H | 8940173666 | 8940173668 |
| CP886 | CA146437 | CA146436 |
| CP886H | CA146437 | CA147668 |

PROTECTIVE COVERS



| TOOL'S MODEL | ACCESSORY'S PART NUMB |
|------------------|--------------------------|
| CP7829/CP7829H | CA133961 |
| CP7830Q/CP7830HQ | CA147993 |
| CP826/CP826T | CA154993 |
| CP886/CP886H | CA133961 |



SET - 1/4 SQUARE DRIVE IMPACT SOCKETS



| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS |
|----------|-------------|---------------|---------------|---|
| | | | METRIC (mm) | |
| SS2114 | 8940164436 | STANDARD | 14 | 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 |
| SS2114D | 8940164437 | DEEP | 14 | 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 |
| SS2112DG | 8940164440 | DEEP MAGNETIC | 12 | 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 |
| | | | SAE (in.) | |
| SS2010E | 8940164442 | DEEP | 10 | 3/16"; 7/32"; 1/4"; 9/32"; 5/16"; 11/32"; 3/8"; 7/16"; 1/2" & 9/16" |
| SS206U | 8940164443 | UNIVERSAL | 6 | 1/4"; 5/16"; 3/8"; 7/16"; 1/2"& 9/16" |
| SS209G | 8940164444 | MAGNETIC | 9 | 3/16"; 7/32"; 1/4"; 9/32"; 5/16"; 11/32"; 3/8"; 7/16" & 1/2" |
| SS209DG | 8940164445 | DEEP MAGNETIC | 9 | 3/16"; 7/32"; 1/4"; 9/32"; 5/16"; 11/32"; 3/8"; 7/16" & 1/2" |

SET - 3/8" SQUARE DRIVE IMPACT SOCKETS



| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS MM | | | | | |
|-------------|-------------|----------------|---------------|--|--|--|--|--|--|
| METRIC (mm) | | | | | | | | | |
| SS3113 | 8940164446 | STANDARD | 13 | 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 | | | | | |
| SAE (in.) | | | | | | | | | |
| SS3012U | 8940164454 | UNIVERSAL | 12 | 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1" | | | | | |
| SS3012DU | 8940164455 | DEEP UNIVERSAL | 12 | 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1" | | | | | |
| SS309DG | 8940164457 | DEEP MAGNETIC | 9 | 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4" | | | | | |



SET - 1/2" SQUARE DRIVE IMPACT SOCKETS



| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS MM |
|----------|-------------|-----------------|---------------|--|
| | | | METRIC (mm) | |
| SS4114 | 8940164458 | STANDARD | 14 | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27 |
| SS4114D | 8940164459 | DEEP | 14 | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27 |
| SS4113DU | 8940164461 | DEEP UNIVERSAL | 13 | 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 |
| SS413DTW | 8940166760 | THIN WALL | 3 | 17, 19, 21 |
| | | | SAE (in.) | |
| SS4013D | 8940164466 | DEEP | 13 | 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4" |
| SS4014DU | 8940164468 | DEEP UNIVERSAL | 14 | 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16" & 1-1/4" |
| SS4011G | 8940164469 | MAGNETIC | 11 | 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1" |
| SS4011DG | 8940164470 | DEEP MAGNETIC | 11 | 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16" , 1" |
| | | MET | RIC (mm) & SA | E (in) |
| SS4211WP | 8940164471 | WHEEL PROTECTOR | 11 | 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 17mm, 19mm, 21mm, 22mm, 23mm |
| SS4229D | 8940166940 | WHEEL SERVICE | 27 | 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4", DP 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27mm. 2 sockets Flip: 3/4x13/16, 19x21mm |





SET 1/2" SQUARE DRIVE FLIP SOCKETS



| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS MM |
|----------|-------------|------|---------------|-----------------------|
| SS422FTW | 8940169701 | FLIP | 2 | 19x21 mm; 3/4"x13/16" |

SET - 3/4" SQUARE DRIVE IMPACT SOCKETS



| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS MM | | | | |
|-------------|-------------|---------------|---------------|---|--|--|--|--|
| METRIC (mm) | | | | | | | | |
| SS618 | 8940164472 | STANDARD | 8 | 26, 27, 29, 30, 32, 35, 36, 38 | | | | |
| SS618D | 8940164473 | DEEP | 8 | 26, 27, 29, 30, 32, 35, 36, 38 | | | | |
| SS6111DWS | 8940167072 | WHEEL SERVICE | 11 | Square: 17, 19, 21 mm Deep: 27, 30, 32, 33, 35, 36, 38, 41 mm | | | | |

SET - 1" SQUARE DRIVE IMPACT SOCKETS



| MODEL | PART NUMBER | TYPE | NO. OF PIECES | DIMENSIONS MM | | | | | |
|-----------|-------------|---------------|---------------|--|--|--|--|--|--|
| | METRIC (mm) | | | | | | | | |
| SS818 | 8940164476 | STANDARD | 8 | 27, 30, 32, 33, 35, 36, 38, 41mm | | | | | |
| SS818D | 8940164477 | DEEP | 8 | 27, 30, 32, 33, 35, 36, 38, 41mm | | | | | |
| SS8107WS | 8940167877 | WHEEL SERVICE | 7 | 5 Deep: 27, 33, 35, 36, 38, 41 mm; Square: 17, 22 mm | | | | | |
| | | | METRIC (mm) & | SAE (in) | | | | | |
| SS8210HDW | 8940166939 | WHEEL SERVICE | 10 | DP: 33mm, 1", 1-3/16", 1-3/4"; TW DP: 1-1/16", 1-1/8", 1-1/4"; Ctrld DP 1-1/2"; Sq: 13/16", 15/16" | | | | | |
| SS8107WS | 8940167877 | WHEEL SERVICE | 8 | 27, 33, 35, 36, 38, 41 mm; Sq: 17, 22 mm | | | | | |

3/8" IMPACT SOCKETS - SINGLE PIECES



| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS | | | | |
|-------------|----------------------------------|------------------|-----------|------------|--|--|--|--|
| METRIC (mm) | | | | | | | | |
| S313M | 3/8" DR. STD IMPACT SOCKET 13MM | 8940163791 | STANDARD | 13 | | | | |
| S313MD | 3/8" DR. DEEP IMPACT SOCKET 13MM | 8940163819 | DEEP | 13 | | | | |

1/2" IMPACT SOCKETS - SINGLE PIECES







| SINGLE PIECES | | | | |
|---------------|----------------------------------|------------------|-----------------|------------|
| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS |
| | METRIC (mm) | | | |
| S413M | 1/2" DR. STD IMPACT SOCKET 13MM | 8940163955 | STANDARD | 13mm |
| S415M | 1/2" DR. STD IMPACT SOCKET 15MM | 8940163957 | STANDARD | 15mm |
| S417M | 1/2" DR. STD IMPACT SOCKET 17MM | 8940163959 | STANDARD | 17mm |
| S418M | 1/2" DR. STD IMPACT SOCKET 18MM | 8940163960 | STANDARD | 18mm |
| S419M | 1/2" DR. STD IMPACT SOCKET 19MM | 8940163961 | STANDARD | 19mm |
| S420M | 1/2" DR. STD IMPACT SOCKET 20MM | 8940163962 | STANDARD | 20mm |
| S421M | 1/2" DR. STD IMPACT SOCKET 21MM | 8940163963 | STANDARD | 21mm |
| S424M | 1/2" DR. STD IMPACT SOCKET 24MM | 8940163966 | STANDARD | 24mm |
| S430M | 1/2" DR. STD IMPACT SOCKET 30MM | 8940163972 | STANDARD | 30mm |
| S413MD | 1/2" DR. DEEP IMPACT SOCKET 13MM | 8940164003 | DEEP | 13mm |
| S415MD | 1/2" DR. DEEP IMPACT SOCKET 15MM | 8940164005 | DEEP | 15mm |
| S416MD | 1/2" DR. DEEP IMPACT SOCKET 16MM | 8940164006 | DEEP | 17mm |
| S417MD | 1/2" DR. DEEP IMPACT SOCKET 17MM | 8940164007 | DEEP | 18mm |
| S418MD | 1/2" DR. DEEP IMPACT SOCKET 18MM | 8940164008 | DEEP | 19mm |
| S419MD | 1/2" DR. DEEP IMPACT SOCKET 19MM | 8940164009 | DEEP | 20mm |
| S421MD | 1/2" DR. DEEP IMPACT SOCKET 21MM | 8940164010 | DEEP | 21mm |
| 5427MD | 1/2" DR. DEEP IMPACT SOCKET 27MM | 8940164012 | DEEP | 24mm |
| S430MD | 1/2" DR. DEEP IMPACT SOCKET 30MM | 8940164015 | DEEP | 30mm |
| 5427MD | 1/2" DR. DEEP IMPACT SOCKET 27MM | 8940164012 | DEEP | 24mm |
| S430MD | 1/2" DR. DEEP IMPACT SOCKET 30MM | 8940164015 | DEEP | 30mm |
| | THIN WALL WHEEL SOCI | KETS (mm) | | |
| S417MWP | 1/2"DR WHEEL PROT IMPACT 17MM | 8940164134 | THIN WALL WHEEL | 17mm |
| S419MWP | 1/2"DR WHEEL PROT IMPACT 19MM | 8940164135 | THIN WALL WHEEL | 19mm |
| S421MWP | 1/2"DR WHEEL PROT IMPACT 21MM | 8940164136 | THIN WALL WHEEL | 21mm |
| S422MWP | 1/2"DR WHEEL PROT IMPACT 22MM | 8940164137 | THIN WALL WHEEL | 22mm |
| S417METW | 1/2" DR EX THIN WALL DEEP 17MM | 8940167729 | THIN WALL DEEP | 17mm |
| S419METW | 1/2" DR EX THIN WALL DEEP 19MM | 8940167730 | THIN WALL DEEP | 19mm |
| S421METW | 1/2" DR EX THIN WALL DEEP 21MM | 8940167731 | THIN WALL DEEP | 21mm |
| S422METW | 1/2"DR EX THIN WALL DEEP 22MM | 8940167728 | THIN WALL DEEP | 22mm |

3/4" IMPACT SOCKETS - SINGLE PIECES





| SINGLE PIECES | | | | | | | | | |
|---------------|----------------------------------|------------------|-----------|------------|--|--|--|--|--|
| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS | | | | | |
| | METRIC (mm) | | | | | | | | |
| S619M | 3/4" DR. STD IMPACT SOCKET 19MM | 8940164180 | STANDARD | 19mm | | | | | |
| S622M | 3/4" DR. STD IMPACT SOCKET 22MM | 8940164183 | STANDARD | 22mm | | | | | |
| S624M | 3/4" DR. STD IMPACT SOCKET 24MM | 8940164185 | STANDARD | 24mm | | | | | |
| S627M | 3/4" DR. STD IMPACT SOCKET 27MM | 8940164188 | STANDARD | 27mm | | | | | |
| S630M | 3/4" DR. STD IMPACT SOCKET 30MM | 8940164191 | STANDARD | 30mm | | | | | |
| S632M | 3/4" DR. STD IMPACT SOCKET 32MM | 8940164193 | STANDARD | 32mm | | | | | |
| S633M | 3/4" DR. STD IMPACT SOCKET 33M6 | 8940164194 | STANDARD | 33mm | | | | | |
| S636M | 3/4" DR. STD IMPACT SOCKET 36MM | 8940164197 | STANDARD | 36mm | | | | | |
| S641M | 3/4" DR. STD IMPACT SOCKET 41MM | 8940164201 | STANDARD | 41mm | | | | | |
| S646M | 3/4" DR. STD IMPACT SOCKET 46MM | 8940164205 | STANDARD | 46mm | | | | | |
| S619MD | 3/4" DR. DEEP IMPACT SOCKET 19MM | 8940164248 | DEEP | 19mm | | | | | |
| S622MD | 3/4" DR. DEEP IMPACT SOCKET 22MM | 8940164251 | DEEP | 22mm | | | | | |
| S624MD | 3/4" DR. DEEP IMPACT SOCKET 24MM | 8940164253 | DEEP | 24mm | | | | | |
| S627MD | 3/4" DR. DEEP IMPACT SOCKET 27MM | 8940164256 | DEEP | 27mm | | | | | |
| S630MD | 3/4" DR. DEEP IMPACT SOCKET 30MM | 8940164259 | DEEP | 30mm | | | | | |
| S632MD | 3/4" DR. DEEP IMPACT SOCKET 32MM | 8940164261 | DEEP | 32mm | | | | | |
| S633MD | 3/4" DR. DEEP IMPACT SOCKET 33MM | 8940164262 | DEEP | 33mm | | | | | |
| S636MD | 3/4" DR. DEEP IMPACT SOCKET 36MM | 8940164265 | DEEP | 36mm | | | | | |
| S641MD | 3/4" DR. DEEP IMPACT SOCKET 41MM | 8940164269 | DEEP | 41mm | | | | | |



3/4" IMPACT SOCKETS - SINGLE PIECES



| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS | | | | | |
|-------|-------------------------------------|------------------|-----------|------------|--|--|--|--|--|
| | SAE (in) | | | | | | | | |
| S628 | 3/4" DR. STD IMPACT SOCKET 1-3/4" | 8940164159 | STANDARD | 1-3/4" | | | | | |
| S630 | 3/4" DR. STD IMPACT SOCKET 1-7/8" | 8940164161 | STANDARD | 1-7/8" | | | | | |
| S636 | 3/4" DR. STD IMPACT SOCKET 2-1/4' | 8940164167 | STANDARD | 2-1/4' | | | | | |
| S645 | 3/4" DR. STD IMPACT SOCKET 2-13/16" | 8940164176 | STANDARD | 2-13/16" | | | | | |
| S647 | 3/4" DR. STD IMPACT SOCKET 2-15/16" | 8940164178 | STANDARD | 2-15/16" | | | | | |
| S618D | 3/4" DR. DEEP IMPACT SOCKET 1-1/8" | 8940164217 | DEEP | 1-1/8" | | | | | |
| S620D | 3/4" DR. DEEP IMPACT SOCKET 1-1/4' | 8940164219 | DEEP | 1-1/4' | | | | | |
| S624D | 3/4" DR. DEEP IMPACT SOCKET 1-1/2" | 8940164223 | DEEP | 1-1/2" | | | | | |
| S630D | 3/4" DR. DEEP IMPACT SOCKET 1-7/8" | 8940164229 | DEEP | 1-7/8" | | | | | |
| S644D | 3/4" DR. DEEP IMPACT SOCKET 2-3/4" | 8940164243 | DEEP | 2-3/4" | | | | | |

1" IMPACT SOCKETS - SINGLE PIECES







| NGLE PIECES | | | | | | | | |
|-------------|-----------------------------------|------------------|-----------|------------|--|--|--|--|
| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS | | | | |
| | METRIC (mm) | | | | | | | |
| S824M | 1" DR. STD IMPACT SOCKET 24MM | 8940164327 | STANDARD | 24mm | | | | |
| S827M | 1" DR. STD IMPACT SOCKET 27MM | 8940164330 | STANDARD | 27mm | | | | |
| S830M | 1" DR. STD IMPACT SOCKET 30MM | 8940164333 | STANDARD | 30mm | | | | |
| S832M | 1" DR. STD IMPACT SOCKET 32MM | 8940164334 | STANDARD | 32mm | | | | |
| S833M | 1" DR. STD IMPACT SOCKET 33MM | 8940164335 | STANDARD | 33mm | | | | |
| S836M | 1" DR. STD IMPACT SOCKET 36MM | 8940164337 | STANDARD | 36mm | | | | |
| S838M | 1" DR. STD IMPACT SOCKET 38MM | 8940164338 | STANDARD | 38mm | | | | |
| S841M | 1" DR. STD IMPACT SOCKET 41MM | 8940164340 | STANDARD | 41mm | | | | |
| S846M | 1" DR. STD IMPACT SOCKET 46MM | 8940164345 | STANDARD | 46mm | | | | |
| S824MD | 1" DR. DEEP IMPACT SOCKET 24MM | 8940164407 | DEEP | 24mm | | | | |
| S827MD | 1" DR. DEEP IMPACT SOCKET 27MM | 8940164410 | DEEP | 27mm | | | | |
| S830MD | 1" DR. DEEP IMPACT SOCKET 30MM | 8940164413 | DEEP | 30mm | | | | |
| S832MD | 1" DR. DEEP IMPACT SOCKET 32MM | 8940164414 | DEEP | 32mm | | | | |
| S833MD | 1" DR. DEEP IMPACT SOCKET 33MM | 8940164415 | DEEP | 33mm | | | | |
| S836MD | 1" DR. DEEP IMPACT SOCKET 36MM | 8940164418 | DEEP | 36mm | | | | |
| S838MD | 1" DR. DEEP IMPACT SOCKET 38MM | 8940164419 | DEEP | 38mm | | | | |
| S841MD | 1" DR. DEEP IMPACT SOCKET 41MM | 8940164421 | DEEP | 41mm | | | | |
| S846MD | 1" DR. DEEP IMPACT SOCKET 46MM | 8940164426 | DEEP | 46mm | | | | |
| | SAE | (in) | | | | | | |
| S813 | 1" DR. STD IMPACT SOCKET 13/16" | 8940164276 | STANDARD | 13/16" | | | | |
| S820 | 1" DR. STD IMPACT SOCKET 1-1/4" | 8940164283 | STANDARD | 1-1/4" | | | | |
| S830 | 1" DR. STD IMPACT SOCKET 1-7/8" | 8940164293 | STANDARD | 1-7/8" | | | | |
| S813D | 1" DR. DEEP IMPACT SOCKET 13/16" | 8940164356 | DEEP | 13/16" | | | | |
| S823D | 1" DR. DEEP IMPACT SOCKET 1-7/16" | 8940164366 | DEEP | 1-7/16" | | | | |
| S828D | 1" DR. DEEP IMPACT SOCKET 1-3/4" | 8940164371 | DEEP | 1-3/4" | | | | |

1-1/2" IMPACT SOCKETS - SINGLE PIECES



| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS | | | | | |
|-------------|----------------------------------|------------------|-----------|------------|--|--|--|--|--|
| METRIC (mm) | | | | | | | | | |
| S1041M | 1-1/2" DR STD IMPACT SOCKET 41MM | 8940169348 | STANDARD | 41mm | | | | | |
| S1046M | 1-1/2" DR STD IMPACT SOCKET 46MM | 8940169349 | STANDARD | 46mm | | | | | |
| S1050M | 1-1/2" DR STD IMPACT SOCKET 50MM | 8940169350 | STANDARD | 50mm | | | | | |
| S1055M | 1-1/2" DR STD IMPACT SOCKET 55MM | 8940169351 | STANDARD | 55mm | | | | | |
| S1060M | 1-1/2" DR STD IMPACT SOCKET 60MM | 8940169352 | STANDARD | 60mm | | | | | |
| S1065M | 1-1/2" DR STD IMPACT SOCKET 65MM | 8940169353 | STANDARD | 65mm | | | | | |
| S1070M | 1-1/2" DR STD IMPACT SOCKET 70MM | 8940169354 | STANDARD | 70mm | | | | | |
| S1075M | 1-1/2" DR STD IMPACT SOCKET 75MM | 8940169355 | STANDARD | 75mm | | | | | |
| S1080M | 1-1/2" DR STD IMPACT SOCKET 80MM | 8940169356 | STANDARD | 80mm | | | | | |
| S1085M | 1-1/2" DR STD IMPACT SOCKET 85MM | 8940169357 | STANDARD | 85mm | | | | | |
| S1090M | 1-1/2" DR STD IMPACT SOCKET 90MM | 8940169358 | STANDARD | 90mm | | | | | |
| | | | | | | | | | |

1" SURFACE DRIVE SOCKETS - LONG VERSION - SINGLE PIECES



| MODEL | DESCRIPTION | ACC. PART NUMBER | ACC. TYPE | DIMENSIONS | | | | | |
|-------------|-----------------------|------------------|---------------|------------|--|--|--|--|--|
| METRIC (mm) | | | | | | | | | |
| SD30 | Socket-SQ1"-L108-SD30 | 8940177797 | SURFACE DRIVE | 30mm | | | | | |
| SD32 | Socket-SQ1"-L108-SD32 | 8940177798 | SURFACE DRIVE | 32mm | | | | | |
| SD33 | Socket-SQ1"-L108-SD33 | 8940177799 | SURFACE DRIVE | 33mm | | | | | |
| | Retainer ring | 8940177800 | | | | | | | |

EXTENSION BARS





| ACC. MODEL | ACC. PART NUMBER | SQAURE DRIVE / SIZE | DIAMETER SQUARE |
|--------------------------------------|------------------|---------------------|-----------------|
| | | | mm |
| E36 3/8 DR 6" EXTENSION BAR | 8940165987 | 3/8" | 3/4" |
| E43 1/2 DR 3" EXTENSION BAR | 8940165994 | 1/2" | 1" |
| E45 1/2 5" EXTENSION BAR | 8940165995 | 1/2" | 1" |
| E410 1/2 DR 10" EXTENSION BAR | 8940165997 | 1/2" | 1" |
| J4U 1/2 DR UNIVERSAL JOINT | 8940165998 | 1/2" | 1-5/16" |
| E63 3/4 DR 3" EXTENSION BAR | 8940166004 | 3/4" | 1-3/4" |
| E67 3/4 DR 7" EXTENSION BAR | 8940166005 | 3/4" | 1-3/4" |
| E613 3/4 DR 13" EXTENSION BAR | 8940166007 | 3/4" | 1-3/4" |
| E83 1" DR 3" EXTENSION BAR | 8940166011 | 1" | 2-1/8" |
| E87 1" DR 7" EXTENSION BAR | 8940166012 | 1" | 2-1/8" |
| J8U 1" DR UNIVERSAL JOINT w/Pin hole | 8940166015 | 1" | 2-5/16" |

ADAPTORS



| ACC. MODEL | ACC. PART NUMBER | SQAURE DRIVE SIZE | CONNECTION SIZE (TO A SOCKET) | CONNECTION GENDER |
|----------------------------------|------------------|-------------------|-------------------------------|-------------------|
| | | in. | in. | |
| A308 3/8 DR X 1/2" MALE ADAPTOR | 8940165984 | 3/8" | 1/2" | Male |
| A406 1/2 DR X 3/8" MALE ADAPTER | 8940165992 | 1/2" | 3/8" | Male |
| A4012 1/2 DR X 3/4" MALE ADAPTER | 8940165993 | 1/2" | 3/4" | Male |
| A608 3/4 DR X 1/2" MALE ADAPTER | 8940166001 | 3/4" | 1/2" | Male |
| A616 3/4 DR X 1" MALE ADAPTER | 8940166002 | 3/4" | 1" | Male |
| Δ812 1" DR Χ 3//" ΜΔΙ Ε ΔΠΔΡΤΕΡ | 8940166009 | 1" | 3///" | Male |

| Notes | |
|-------|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |


TORQUE WRENCHES



Mechanical Torque Wrenches

CP89 SERIES

Complete range 1/4" - 3/8" - 1/2" - 3/4" - 1"

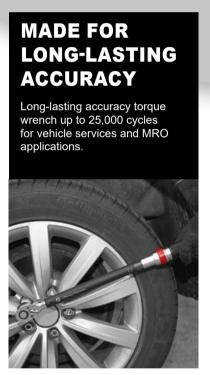



FEATURES AND BENEFITS

- Precision: 4% according to the 6789 ISO specifications
- Comfort: Black aluminum handle (1)
- Easy & precise adjustment: Scale in Nm Torque adjustment with manual locking in front of the handle + fine scale graduation (1 Nm) (2)
- Robust: 54 teeth ratchet with quick socket release pear head ratchet 4/ 5 teeth in contact when tightening (3)
- Complete range : $\frac{1}{4}$ " $\frac{3}{8}$ " $\frac{1}{2}$ " $\frac{3}{4}$ " 1"
- Durable : Tolerance of durability -> up to 20000 cycles
- Touch & sound signals on release
- Provided with calibration certificate
- Provided in a protective Blow molded case



MADE FOR LONG-LASTING ACCURACY

CP8910

Same features as CP8905 with 3/8" square drive - see below for torque capacities

CP8917

Same features as CP8915 - see below for torque capacities

CP8925

Same features as CP8920 - with 1" square drive - see below for torque capacities

See accessories page 131

with E: metric versions - without E: imperial version

| MODEL | PART NUMBER | SQUARE DRIVE | WORKING T | ORQUE (FW) | MAX TOR | QUE(REV) | CAPA | CITY | GRADUATION | | LEN | GTH | WEIGHT | |
|----------|-------------|-----------------|-----------|------------|---------|----------|----------|-----------------|------------|-------|-------|------|--------|------|
| | | in. | ft.lb | Nm | ft.lb | Nm | N*m (Nm) | lbf*in (lbf*ft) | Nm | ft.lb | ln. | mm | lb | kg |
| CP8905 E | 8941089050 | 1/4 | 3.688 | 5 | 18.44 | 25 | 25 | 18.44 | 0.1 | 0.073 | 9.65 | 245 | 2.82 | 1.28 |
| CP8905 | 8941089055 | 1/4 | 50.15 | 68 | 250 | 339 | 339 | 250 | 1 | 0.73 | 9.65 | 245 | 2.82 | 1.28 |
| CP8910 E | 8941089100 | 3/8 | 14.75 | 20 | 73.76 | 100 | 100 | 73.76 | 0.5 | 0.37 | 16.14 | 410 | 3.31 | 1.5 |
| CP8910 | 8941089105 | 3/8 | 15 | 20.3 | 75 | 101.7 | 101.7 | 75 | 0.68 | 0.5 | 16.14 | 410 | 3.31 | 1.5 |
| CP8915 E | 8941089150 | 1/2 | 29.5 | 40 | 147.5 | 200 | 200 | 147.5 | 1 | 0.73 | 19.49 | 495 | 3.46 | 1.57 |
| CP8915 | 8941089155 | 1/2 | 30 | 40.675 | 150 | 203.37 | 203.37 | 150 | 1.35 | 1 | 20.47 | 520 | 4.45 | 2.02 |
| CP8917 E | 8941089170 | 1/2 | 44.25 | 60 | 250.77 | 340 | 340 | 250.77 | 2 | 1.475 | 24.02 | 610 | 3.88 | 1.76 |
| CP8917 | 8941089175 | 1/2 | 50 | 68 | 250 | 339 | 339 | 250 | 2.7 | 2 | 24.02 | 610 | 3.88 | 1.76 |
| CP8920 E | 8941089200 | 3/4 | 110.6 | 150 | 553 | 750 | 750 | 553 | 5 | 3.7 | 41.73 | 1060 | 35.7 | 16.2 |
| CP8920 | 8941089205 | 3/4 | 110 | 149 | 550 | 745.7 | 745.7 | 550 | 6.8 | 5 | 41.73 | 1060 | 35.7 | 16.2 |
| CP8925 E | 8941089250 | 1 | 147.5 | 200 | 737.6 | 1000 | 1000 | 737.6 | 5 | 3.7 | 49.41 | 1255 | 15 | 6.84 |
| CP8925 | 8941089255 | 1 | 150 | 203.4 | 1017 | 750 | 750 | 1017 | 6.8 | 5 | 49.41 | 1255 | 15 | 6.84 |

Listed specifications are for reference only. Please check documents in each tool.



Electronic Torque wrenches CP89 ETORQUE

Capacity 1/2"



QUALITY CONTROL ANYWHERE. PERFORMANCE ANYTIME.

CP89 eTorque Wrenches provide accuracy, durability, and connectivity features not available anywhere else. Connected "TC" models utilize CPLinQ to control process quality. Standalone models allow quick adjustments to torque and accuracy at the tool.



FEATURES AND BENEFITS

- CPLinQ compatibility (TC models) with high precision at +/- 3% Torque & +/- 2% Angle according to ISO 6789 – 1 2027
- Haptic: 12 LED progressive light display, very strong noise and vibration indicators as torque spec is approached, met, and exceeded
- Durability: Robust gear system accurate up to 25,000 cycles
- Ergonomic: 72 teeth (5°) gear head for small working space jobs
- Easy to set up: user-friendly interface
- Greater operator comfort: soft grip, non-slip handle
- TC models also feature Adjustable Accuracy, Sequencing, Re-hit Detection, and Torque Check capabilities to ensure optimal production efficiency and proper application of torque every time



CP8916

Same feature as CP8916TC without functions among Torque Check..., see details in the table next page



CP8918

Same features as CP8918TC without functions among Torque Check ... , see details in the table next page





Control your tightening and counting sequence with:

• P-Set library featuring dedicated requirements for each job Counting sequence for 100% tightening guarantee and 0% rework



Tightening report for a quick report and data export









Decrease the risk of breakage with:

- Tool status follow-up management Operation alert
 - · Maintenance timeline

" With data collection, sequence set-up, CPLinQ is the perfect solution to secure your jobs in the field! "

> William Mouille, **Product Manager, Chicago Pneumatic**

| | CP89 STANDALONE Version | CP89 TC Version |
|-------------------------------------|-------------------------|-----------------------------|
| Torque Control | At tool via LED Screen | mmVia CPLinQ App or at tool |
| Torque Accuracy | +/- 3% (Adju | stable at tool) |
| Angle Control | X | Via CPLinQ App |
| Angle Accuracy | Х | +/- 2% |
| P-Set Library | Х | 0 |
| Counting Sequence | Х | 0 |
| Data Collection | Х | 0 |
| Re-Hit Detection | Х | 0 |
| Torque Check | Х | D |
| Quick Report | Х | D |
| .XLS Report via email or app | Х | Ō |
| Tool Status Management | Х | 0 |
| Operating Alert | Х | 0 |
| Tool Lock & Finder | Х | |

| MODEL | PART NUMBER | DIMEN | ISIONS | | HEAD | AD TORQUE RANGE | | ANGLE MEASUREMENT | | CP LINK CONNECTIVITY | WEIGHT | VIBRATION INDICATION | OPERATING N TEMPERATURE | | |
|-----------------|-------------|---------------|---------------------|-------|--------|-----------------|-----------------|----------------------|----------|-------------------------|----------|----------------------|----------------------------|--|--------------------------|
| | | mm | in. | Туре | Square | Teeth | NM (ft/lb) | Accuracy | Overload | Available | Accuracy | | Kg (lb) | | C° (F°) |
| CP8916 | 8941089160 | 435 x 44 x 45 | 20.1" x 1.7" x 1.8" | Fixed | 1/2" | 72 | 20-200 (15-147) | +/-3% | 110% | Х | - | Х | 1.3 (2.9) | | -10° - 40°C (14° - 104°) |
| CP8916TC | 8941089161 | 435 x 44 x 45 | 20.1" x 1.7" x 1.8" | Fixed | 1/2" | 72 | 20-200 (15-147) | +/-3% | 110% | | +/-2% | | 1.3 (2.9) | | -10° - 40°C (14° - 104°) |
| CP8918 | 8941089180 | 629 x 44 x 45 | 24.7" x 1.7" x 1.8" | Fixed | 1/2" | 72 | 34-340 (25-250) | +/-3% | 110% | Х | - | X | 1.5 (3.3) | | -10° - 40°C (14° - 104°) |
| CP8918TC | 8941089181 | 629 x 44 x 45 | 24.7" x 1.7" x 1.8" | Fixed | 1/2" | 72 | 34-340 (25-250) | +/-3% | 110% | | +/-2% | | 1.5 (3.3) | | -10° - 40°C (14° - 104°) |



CPCare: Enhancing your tool performance and productivity

Introducing CPCare: the comprehensive service package designed for the CP tools. With CPCare, we offer a range of specialized services aimed at maximizing the efficiency and lifespan of your tool, ensuring you can work safely and efficiently.

With our tool failure analysis, we can identify and rectify any issues promptly, minimizing downtime and maximizing productivity. Regular preventive maintenance checks are also included in the package, allowing us to catch potential problems before they escalate, keeping your tool in prime condition. Benefit from tool failure analysis, preventive maintenance, budget control, calibration, and tool loan services. Our expert technicians prioritize proper tool usage and regular inspections to ensure optimal results.



Time saving by a clearly definded service process.



Efficient tool failure analysis done by continuous trained technician.



Test certificate report and calibration following ISO5393 and certified supplier ISO17025



Maintenance budget control

TOOL CALIBRATION

- Machine Capability Test certificate (MCT)
- Standard certificate worldwide
- Calibration process traceable to national standards following ISO 17025

CPCare

- ✓ Fixed price per year
- ✓ Preventive Maintenance wear out spare parts¹ and labour²
- Once per year or after x thousand cycles depending on which occurs sooner
- ✓ TOOL CALIBRATION after preventive maintenance

Opt. Tool loan during maintenance



- ¹ Wear out spare parts are the gearbox components which the wear does not depend on the torque applied but on the time the tools is used.
- ² During the preventive maintenance, the tool is disassembled, wear out spare parts are replaced. All other parts are cleaned and evaluated.

Extra quotation is issued only in case other parts should be replaced before the next PM.



CPCare Extends the life of your tool by up to 20%!

Contact your CP representative for more information

Battery Torque Wrenches





CP8609SERIES



Output drive 1"

RIGHT TORQUE. SAFE HAUL

For truck and bus tire changing application, CP8609 eBlueTork is an accurate and ergonomic solution to ensure safety for both operators and end users. With CPLinQ app it also adds control and traceability to your process quality.





FEATURES AND BENEFITS

- High precision (+/- 4%) for safe tightening
- Fast and long-lasting gearbox dedicated to wheel tightening
- Extended mobility with lightweight and compact battery
- Automatic release reaction arm
- Intuitive handling either on OLED Digital screen of the tool or via CPLinQ app

Suitable for all heavy vehicles





How to choose your eBluetork **Torque Wrench?**

1. Choose reaction bar type according to wheel type



Wheel without cover



Deep wheel



Wheel with cover



Blade



Standard Cup



Extended Cup



Spring loaded cup 894 016 4622



Japanese type cup 894 016 7401

CUPS (To be ordered separately)

2. Choose trigger number



Trigger + safety button



1 trigger

Battery Torque Wrenches

3. Choose the Feature Version according to your tightening process



Control your tightening and counting sequence with:

- P-Set library featuring dedicated requirements for each job
- Counting sequence for 100% tightening guarantee and 0% rework



Report your jobs

Tightening report for a quick report and data export












Maintain your tool

Decrease the risk of breakage with:

- Tool status follow-up management
- Operation alert
- Maintenance timeline

" With data collection, sequence set-up and maintenance timeline, CPLinQ is the perfect solution to secure your jobs in the field! "

> Nil Gauter, Product Manager, Chicago Pneumatic

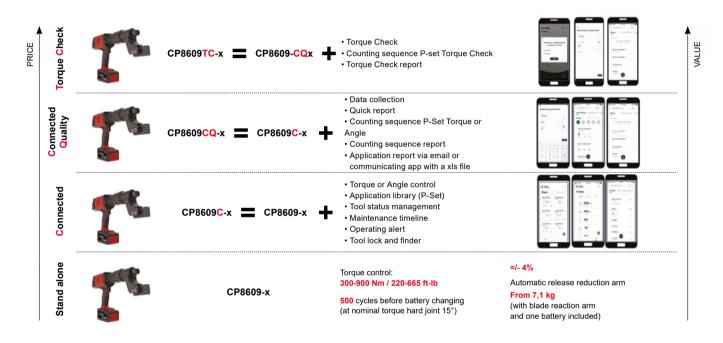

ACCESSORIES

BATTERY CHARGER CP18-36CH

See details page 53

BATTERY PACK CP36XP25 36V 2,5Ah


See details page 53

PROTECTIVE COVER SUSPENSION YOKE

See details page 53



Technical Data

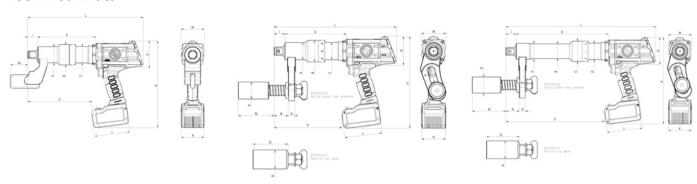

| Blade models | | | | | | | | Cup models | | | | | | | | | Extended Cup models | | | | | |
|---------------|-------|------|------|------|------|-------|-------|------------|------|------|------|------|------|------|------|------|---------------------|---------------|---------------|--------------|--|--|
| | | Α | В | С | D | E | F | G | ı | J | ĸ | M | N | 0 | P | Q | R | Height (H) | Length (L) | Width (W) | | |
| Blade | (mm) | 53 | 67 | 54 | - | 191 | 211 | 89 | 33 | 116 | 76 | 57 | - | - | - | - | - | 285 | 380 | 77 | | |
| models | (in.) | 2.09 | 2.64 | 2.13 | - | 7.52 | 8.31 | 3.50 | 1.30 | 4.57 | 2.99 | 2.24 | - | - | - | - | - | 11.22 | 14.96 | 3.03 | | |
| Cup | (mm) | 53 | 67 | 54 | - | 191 | 211 | 89 | 33 | 116 | 76 | 111 | 44 | 20 | 53 | 109 | 58 | 285 | 380 | 77 | | |
| models | (in.) | 2.09 | 2.64 | 2.13 | - | 7.52 | 8.31 | 3.50 | 1.30 | 4.57 | 2.99 | 4.37 | 1.73 | 0.79 | 2.09 | 4.29 | 2.28 | 11.22 | 14.96 | 3.03 | | |
| Extended | (mm) | 53 | 49 | 67 | 54 | 305 | 325 | 89 | 34 | 116 | 76 | 111 | 45 | 20 | 53 | 109 | 59 | 285 | 495 | 77 | | |
| Cup models | (in.) | 2.09 | 1.93 | 2.64 | 2.13 | 12.01 | 12.80 | 3.50 | 1.34 | 4.57 | 2.99 | 4.37 | 1.77 | 0.79 | 2.09 | 4.29 | 2.32 | 11.22 | 19.49 | 3.03 | | |

| Reaction bar | | Bla Standard reaction | | Ct Standard for spri Japanese type cup | ng loaded cup or | Extended Cup Extended for spring loaded cup or Japanese type cup (cup not included) | | |
|-------------------------|-------------------------|---------------------------------|-------------|--|----------------------------|---|-------------|--|
| Version | Trigger number | Model name | Part number | Model name | Part number | Model name | Part number | |
| Otan dalama | Trigger + safety button | CP8609-B | 6151570500 | CP8609-C | CP8609-C 6151570730 | | 6151570780 | |
| Stand alone | 1 trigger | CP8609-BT | 6151570440 | CP8609-CT | 6151570560 | CP8609-xCT | 6151570620 | |
| Connected | Trigger + safety button | CP8609C-B | 6151570510 | CP8609C-C | 6151570740 | CP8609C-xC | 6151570790 | |
| Connected | 1 trigger | CP8609C-BT | 6151570450 | CP8609C-CT | 6151570570 | CP8609C-xCT | 6151570630 | |
| Connected Quality | Trigger + safety button | CP8609CQ-B | 6151570520 | CP8609CQ-C | 6151570750 | CP8609CQ-xC | 6151570800 | |
| Connected Quanty | 1 trigger | CP8609CQ-BT | 6151570460 | CP8609CQ-CT | 6151570580 | CP8609CQ-xCT | 6151570640 | |
| Torque Check | Trigger + safety button | CP8609TC-B | 6151570530 | CP8609TC-C | 6151570760 | CP8609TC-xC | 6151570810 | |
| Torque Check 1 trigger | | CP8609TC-BT 6151570470 | | CP8609TC-CT | 6151570590 | CP8609TC-xCT | 6151570650 | |
| Specifications | | | | | | | | |
| Square drive (in.) | | 1 | " | 1 | " | 1' | " | |
| Accuracy (6 sigma)* | | ±4 | % | ±4 | % | ±4 | % | |
| Min/Max torque (Nm) | | 300 - | - 900 | 300 - | 900 | 300 - 900 | | |
| Min/Max torque (ft.lbs | s) | 221 - | - 664 | 221 - | 664 | 221 - 664 | | |
| Nominal working torqu | ue (Nm) | 390 - | - 720 | 390 - | 720 | 390 - 720 | | |
| Nominal working torqu | ue (ft.lbs) | 293 - | - 531 | 293 - | 531 | 293 - | 531 | |
| Max speed all torque | (rpm) | 1 | 5 | 1 | 5 | 1: | 5 | |
| Weight - battery, react | ion arm included (kg) | 7. | 1 | 8.1 (with sta 7.8 (with Japan | | 9.3 (with standard cup) 9.0 (with Japanese type cup) | | |
| Weight - battery, react | ion arm included (lbs) | 15 | i.6 | 17.8 (with st 17.2 (with Japa | | 20.6 (with standard cup) 19.9 (with Japanese type cup) | | |
| Sound pressure (dB(| A)) | 6. | 2 | 6 | 2 | 62 | | |
| Vibration (m/s²) | | <2 | 2.5 | <2 | 5 | <2.5 | | |
| Number of cycles by ba | attery | 50 | 00 | 50 | 00 | 500 | | |

*Based on hard joint 15°at nominal torque

Battery Torque Wrenches

Process & Tooling to optimize your tightening process



STEP 1

Clean bare hub pilots, inspect for wear, and lubricate pads



STEP 2

Clean the drum and studs.
Inspect for fatigue with thread gauge



STEP 3

Clean both sides of each wheel with the CP7202D



STEP 4

Install both wheels.



STEP 5

Oil all studs with the oil can before any pars are installed



STEP 6

Lubricate each nut with one drop of oil between the nut and washer, then turn the washer to work the oil through




STEP 7

Install the nuts by hand.



STEP 8

Use a torque control tool, like the CP8854, to pre-tighten nuts down snug on wheel surface, following the star pattern



STEP 9

Torque all nuts with the CP8609 following the star pattern. Use the sequencing feature (available on CQ and TC versions)



STEP 10

Torque check all nuts with the CP8609 (only available on TC version)

Bluetork Pneumatic Torque Wrenches



CP7600 SERIES -**BLUETORK PNEUMATIC TORQUES WRENCHES**

Output drive 1"

ACCURACY, **FAST RUNDOWN AND ALMOST NO VIBRATION**

CP7600 nutrunner is a reliable and ergonomic solution for truck and bus tire changing operations which brings you accuracy and a quick rundown while also generating very low noise and almost no vibration.





- **Choose reaction bar type**
- **Choose rotating direction**
- **Choose number of torque presets**

More details see next page

How to choose your Bluetork Torque Wrench?

1. Choose reaction bar type



- ...with long-reaching reaction blade (included)
 for North America -
- *C

...extended with spring loaded cup (included)

CUPS (To be ordered with the CP7600C)





...standard for spring loaded cup or Japanese type cup (not included)

Spring loaded cup 894 016 4622

Japanese type cup 894 016 7401

2. Choose rotating direction

- ...Forward only



R ...Forward and reverse



3. Choose number of torque presets

- ...1 torque preset



4P ...4 torque presets



ACCESSORIES



| DESCRIPTION | PART NUMBER |
|----------------------------|-------------|
| Protective cover 1P - Blue | 8940164649 |
| Protective cover 4P - Blue | 8940164651 |

| DESCRIPTION | PART NUMBER |
|-----------------------------------|-------------|
| Suspension york Reversible | 8940166654 |
| Suspension york Non reversible | 8940166659 |

Output drive 1"















CP7600xB-R4P



CP7600xC-R

FEATURES AND BENEFITS

- Air Shut-off torque control at preset torque
- Selection of up to 4 calibrated tightening torques with high accuracy
- Short version with CUPS reaction bar optional
- Low noise level (<77dB)
- Low vibration increases operator comfort for greater productivity. (<2.5 m/s²)



CP7600xC-R

| MODEL | PART NUMBER | DRIVE | FREE SPEED | WORKING T | ORQUE (FW) | | ORQUE EV) | NET W | EIGHT | LEN | GTH | AIR (| | VIBRATION LEVEL ISO 28927 (M/S2) | SOUND PRESS. | | |
|--------------|-------------|-------|---------------|-----------|------------|-------|--------------|-------|-------|-------|-----|-------|-----|--|-----------------|------------|-----|
| | | in. | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | ISO 157 | 44 - dB(A) | in. |
| CP7600xB | 8941076010 | 1 | 100 | 332-664 | 450-900 | 664 | 900 | 13.2 | 6 | 12.91 | 328 | 40 | 19 | <2.5 | 79 | 90 | 3/8 |
| CP7600xB-R | 8941076011 | 1 | 100 | 332-664 | 450-900 | 664 | 900 | 14.5 | 6.6 | 13.58 | 345 | 40 | 19 | <2.5 | 79 | 90 | 3/8 |
| CP7600xB-R4P | 8941076015 | 1 | 100 | 332-664 | 450-900 | 664 | 900 | 15.2 | 6.9 | 14.96 | 380 | 40 | 19 | <2.5 | 79 | 90 | 3/8 |
| CP7600xC-R4P | 8941076025 | 1 | 100 | 332-664 | 450-900 | 664 | 900 | 20 | 9.1 | 19.49 | 495 | 40 | 19 | <2.5 | 79 | 90 | 3/8 |
| CP7600C-R4P | 8941076035 | 1 | 100 | 332-664 | 450-900 | 664 | 900 | 16.9 | 7.7 | 14.96 | 380 | 40 | 19 | <2.5 | 79 | 90 | 3/8 |

Wheel Bluetork Pneumatic Torque Wrenches

PROCESS & TOOLING TO OPTIMIZE YOUR TIGHTENING PROCESS



STEP 1

Clean bare hub pilots, inspect for wear, and lubricate pads.



STEP 2

Clean the drum and studs. Inspect for fatigue with thread gauge.



STEP 3

Thoroughly clean both sides of each wheel with the CP7202D sander and an appropriate abrasive. Inspect all surfaces for cracks and unusual wear.



STEP 4

Install both wheels.



STEP 5

Place two drops of oil near the end of the stud.



STEP 6

Lubricate each nut with one drop of oil between the nut and washer. Rotate the washer to distribute the oil evenly.




STEP 7

Install the nuts by hand.



STEP 8

Use a CP7748 impact wrench on the lowest torque setting to quickly snug all the nuts prior to final torquing.



STEP 9

Using the BlueTork, follow the star pattern above to tighten the nuts to the specified torque.



STEP 10

To ensure each nut has been torqued, a clockwise check may be performed. The BlueTork is pre-calibrated and is designed for precise torquing.

^{*}Procedure illustrated is for reference only. Actual wheel preparation and assembly is dependant on wheel type and may vary. Please refer to the manufacturer's recommendations for proper wheel assembly procedures.

COMFORT

- Disc seat for multi position sitting
- Hook for tool parking position
- High Ergonomy:
- Balance: no need to hold the tool
- 2 x 45° = 90° rotation

EASY TO USE

- Socket support
- Hose support on the back
- Can be use between 2 buses
- Can be used either with Air Blue Tork (CP7600 series) or e-Blue Tork (CP8609 series) and as well with air impact wrenches such as CP7782, CP7783, CP5000, CP7776 ...

HIGH ERGONOMY

- Balancer, no need to hold the tool
- 2x45° = 90° arm rotation


ROBUST

- Stronger steel tube
- Industrial Filter Regulator Lubricator
- Stable with 2 large rear wheel

EASY TO MOVE

- 360° front wheels
- Lightweight: 35kg / 77 lbs



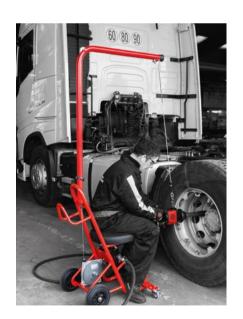

| MODEL | PART NUMBER | WIE | WIDTH | | LENGTH | | HEIGHT | | IGHT | THREAD SIZE | THREAD TYPE |
|---------|-------------|-----------|------------|------------|--------------|------------|--------------|----------|---------|-------------|-------------|
| CP87029 | 8941087029 | mm 510 | in. 208 | mm 1020 | in. 40.16 | mm 1950 | in. 76.77 | kg 35 | lb 77.1 | in. 3/4 | NPT |
| CP87029 | 0941007029 | 510 | 208 | 1020 | 40.10 | 1950 | /0.// | | | 3/4 | NP1 |



Accessories Nutrunners

RECOMMENDEDACCESSORIES



PROTECTIVE COVER CP7600

| TOOL'S MODEL | PART NUMBER |
|--|-------------|
| CP7600xB/CP7600xB-R/CP7600xC-R/CP7600C-R | 8940164649 |
| CP7600xB-R4P/CP7600xC-R4P/CP7600C-R4P | 8940164651 |

SUSPENSION CP7600



| DESIGNATION | PART NUMBER |
|----------------------------|-------------|
| SUSPENSION YOKE CP7600 | 8940166654 |
| SUSPENSION YOKE CP7600-NOR | 8940166659 |

ACCESSORIES CP7600



| DESIGNATION | PART NUMBER |
|------------------------|-------------|
| JAPANEESE REACTION CUP | 8940167401 |
| | |



| SPRING LOADED CUP | 8940164622 |
|-------------------|------------|
| | |



| 400E000DIE0 | | | | | | | |
|----------------------------|-------------------|----------------------------|-------------|--|--|--|--|
| ACCESSORIES PART NUMBER | DESIGNATION | TOOL'S MODEL | PART NUMBER | | | | |
| | | CP8609-C PACK 36V 2.5AH | 6151570730 | | | | |
| | | CP8609C-C PACK 36V 2.5AH | 6151570740 | | | | |
| | | CP8609CQ-C PACK 36V 2.5AH | 6151570750 | | | | |
| 8940167401 | REACTION CUP JAP | CP8609TC-C PACK 36V 2.5AH | 6151570760 | | | | |
| 0940107401 | REACTION CUP JAP | CP8609-CT PACK 36V 2.5AH | 6151570560 | | | | |
| | | CP8609C-CT PACK 36V 2.5AH | 6151570570 | | | | |
| | | CP8609CQ-CT PACK 36V 2.5AH | 6151570580 | | | | |
| | | CP8609TC-CT PACK 36V 2.5AH | 6151570590 | | | | |
| | | | | | | | |
| ACCESSORIES PART NUMBER | DESIGNATION | TOOL'S MODEL | PART NUMBER | | | | |
| | | CP8609-C PACK 36V 2.5AH | 6151570730 | | | | |
| | | CP8609C-C PACK 36V 2.5AH | 6151570740 | | | | |
| | | CP8609CQ-C PACK 36V 2.5AH | 6151570750 | | | | |
| 8940164622 | SPRING LOADED CUP | CP8609TC-C PACK 36V 2.5AH | 6151570760 | | | | |
| 0940104022 | SPRING LUADED CUP | CP8609-CT PACK 36V 2.5AH | 6151570560 | | | | |
| | | CP8609C-CT PACK 36V 2.5AH | 6151570570 | | | | |
| | | CP8609CQ-CT PACK 36V 2.5AH | 6151570580 | | | | |
| | | CP8600TC-CT PACK 36V 2 5AH | 6151570590 | | | | |



Accessories Nutrunners

ACCESSORIES CP8609



BATTERY CHARGER CP18-36CH

FEATURES AND BENEFITS

- Fast Charging: Battery charged in 45 minutes
- Charger Safety: Compliant with the new European standard on safety [IEC 62841]
- Multi Position & Multi Charger: Can stay stable on a table or fixed on a wall One main source cable for multi charger.
- Unique Power Supply Cable : 1 main source cable for several chargers
- Battery Load Level: Load indicator information directly on the battery



BATTERY PACK CP36XP25 36V 2,5Ah

HIGH QUALITY BATTERY FOR LONG RUNTIME ON HEAVY DUTY APPLICATIONS

FEATURES AND BENEFITS

- High Quality 2.5Ah Li-ion cell with individual cell protection
- High Drain Capacity: Strong current capacity with continuous draw to deliver the right quantity of energy at the right moment.
- High ability to continuously supply the correct large current source on demand

| BATTERY CHARGER CP18-36CH | 8940176069 |
|---------------------------|-------------|
| MODEL | PART NUMBER |

| MODEL | PART NUMBER |
|---------------------------------|-------------|
| BATTERY PACK CP36XP25 36V 2,5Ah | 8940176068 |





PROTECTIVE COVER SUSPENSION YOKE

| MODEL | PART NUMBER |
|------------------------------|---------------|
| | |
| CP86 Series protective cover | 615 211 213 0 |
| CP8609 suspension yoke | 894 016 665 4 |

Cordless Impact Wrenches





CP8854 SERIES

Output drive 1/2"

A 2-IN 1 UNIQUE TECHNOLOGYFOR LIGHT VEHICLE TIRE CHANGING

2 in 1 unique technology designed to turn performance, lightweight and the compact features of an air impact wrench into a cordless tool. The CP8854 series is designed for light vehicle tire changing applications in workshops and roadside assistance.



CP8854-2

Same feature as CP8854 with -2" anvil length



FEATURES AND BENEFITS

- Similar in length and weight to high performance 1/2" air Impacts. It offers great maneuverability and helps prevent arm injuries
- Lowest vibration on the market (9.3 m/s²) and noise level rate (87 db(A))
- High performance 4500 RPM. Able to deliver 780 ft.lbs. 1050 Nm maximum torque in reverse
- One Shut Off Position in Forward (at 80 ft.lbs. / ≈ 120 Nm) means no more overtightening*
- No more hand tightening for better productivity with the snugging feature (2 stage trigger in Forward)

* Final torque must be applied manually using a calibrated torque wrench (please refer to the operator's manual)

| MODEL | PART NUMBER | DRIVE | FREE SPEED | | RKING JE (FW) | | | MAX TORQUE (REV) | | WEIGHT | | LENGTH | | HEIGHT | | WIDTH | | VIBRATIONLEVI ISO 28927 (M/S2) | | EL SOUND SOUNE PRESS. POWER | | BATTERY | |
|--------------------|-------------|-------|---------------|----------|------------------|-------|------|---------------------|------|--------|-----|--------|-----|--------|----|-------|-----|-----------------------------------|-----------|--------------------------------|------|---------|--|
| | | in. | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | in. | mm | in. | mm | а | k | ISO 1574 | 4 - dB(A) | V | Ah | | |
| CP8854 BARE TOOL | 8941088548 | 1/2 | 4500 | 0 - 88.5 | 0 - 120 | 774 | 1050 | 4.63 | 2.1 | 7.44 | 189 | 8.7 | 221 | 3.03 | 77 | 10.2 | 3.1 | 87 | 98 | 2.5 | 18 V | | |
| CP8854-2 BARE TOOL | 8941088549 | 1/2 | 4500 | 0 - 88.5 | 0 - 120 | 774 | 1050 | 4.78 | 2.17 | 9.41 | 239 | 8.7 | 221 | 3.03 | 77 | 10.2 | 3.1 | 87 | 98 | 2.5 | 18 V | | |

Accessories Cordless Impact Wrenches









- 1 x CP8854
- 2 x 2.5 Ah 18 V battery packs
- One 18V charger
- One CP soft bag
- One protective boot cover
- Tool Documentation







CP8854-2 Pack 18V

- 1 x CP8854-2
- 2 x 2.5 Ah 18 V battery packs
- One 18V charger
- One CP soft bag
- One protective boot cover
- Tool Documentation

| CP8854-2 Pack 18V | 8941088542 |
|-------------------|-------------|
| | |
| MODEL | PART NUMBER |

Battery and Charger



BATTERY PACK CP18XP25 18V 2.5Ah

HIGH QUALITY BATTERY FOR LONG RUNTIME ONHEAVYDUTYAPPLICATIONS

| BATTERY PACK CP18XP25 18V 2,5Ah | 8940176067 |
|---------------------------------|-------------|
| | |
| MODEL | PART NUMBER |

BATTERY CHARGER CP18-36CH



- Fast Charging: Battery charged in 45 minutes
- Charger Safety: Compliant with the new European standard on safety [IEC 62841]
- Multi Position & Multi Charger : Can stay stable on a table or fixed on a wall One main source cable for multi charger.
- Unique Power Supply Cable : 1 main source cable for several chargers
- Battery Load Level: Load indicator information directly on the battery

| MODEL | PART NUMBER |
|---------------------------|-------------|
| BATTERY CHARGER CP18-36CH | 8940176069 |

Screwdrivers

Output drive 1/4"

10,000 RPM







CP2136

COMPACT, QUICK AND EASY TO USE

FEATURES AND BENEFITS

- Double rocking dog clutch and metal housing for a good durability
- Reversible button, built-in power regulator and starting lever for great ease of use
- Suspension bail for better ergonomics
- Low air consumption for better efficiency
- Lightweight to minimize fatigue

13,000 RPM







CP2141

COMPACTNESS AND HIGH SPEED FOR GLOBAL USE

FEATURES AND BENEFITS

- Double rocking dog clutch and metal housing for a good durability
- Reversible one-hand button for better ease of use
- Low noise level for operator comfort
- Compact design for maximum accessibility in tight spaces



CP2136

| MODEL | PART NUMBER | OUTPUT DRIVE | FREE SPEED | MIN TOR | QUE (FW) | MAX TOR | MAX TORQUE (FW) | | ORQUE (FW) NET WEIGH | | EIGHT | IGHT LENGTH | | FREE SPEED AIR CONS. | | VIBRATION LEVEL ISO 28927 (M/S2) | | L SOUND SOUND PRESS. POWER | | |
|--------|-------------|-----------------|---------------|---------|----------|---------|-----------------|------|----------------------|------|-------|-------------|-----|-------------------------|-----|-------------------------------------|------------|-------------------------------|--|--|
| | | in. | | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 157- | 44 - dB(A) | in. | | |
| CP2136 | 8941021360 | 1/4 | 10,000 | 5.9 | 8 | 15.5 | 21 | 1.5 | 0.68 | 7.28 | 185 | 8.8 | 4.2 | 24.3 | 7.4 | 89 | 100 | 1/4 | | |
| CP2141 | 8941021410 | 1/4 | 13,000 | 7.4 | 10 | 17.7 | 24 | 1.92 | 0.87 | 5.63 | 143 | 18 | 8.5 | 17.4 | 5.3 | 77 | 88 | 1/4 | | |





CP2755

FASTENING TOOL FOR SOFT APPLICATIONS

FEATURES AND BENEFITS

- Fast screw rundown in direct drive for better productivity
- Reverse control at the trigger for better comfort
- · Rubber grip for better handling
- Progressive trigger for better ergonomics

2,100 RPM







CP2780

POSITIVE CLUTCH FOR SOFT APPLICATIONS

FEATURES AND BENEFITS

- Fast screw rundown in positive clutch for better productivity
- Convenient one-handed reverse for better comfort
- Rubber grip for better handling
- Progressive trigger for better ergonomics
- Operator can control clutch engagement for higher torque



CP2756

CP2765

Same features as CP2755 with 900 RPM

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

See accessories page 58

| MODEL | PART NUMBER | OUTPUT DRIVE | FREE SPEED | MIN TOR | QUE (FW) | QUE (FW) MAX TORQUE (FW) | | NET WEIGHT LENGTH | | | LENGTH FREE SPE AIR CONS | | | VIBRATIC ISO 2892 | N LEVEL 7 (M/S2) | SOUND PRESS. | | |
|--------|-------------|-----------------|---------------|---------|----------|--------------------------|-----|-------------------|------|------|-----------------------------|-----|-----|----------------------|---------------------|-----------------|-----------|-----|
| | | in. | | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP2755 | 6151922755 | 1/4 | 2,200 | NA | NA | 5.4 | 7.3 | 2.27 | 1.03 | 6.3 | 160 | 29 | 14 | <2.5 | - | 90 | 101 | 1/4 |
| CP2765 | 6151922765 | 1/4 | 900 | NA | NA | 6.6 | 9 | 2.6 | 1.18 | 7.01 | 178 | 29 | 14 | <2.5 | - | 99 | 110 | 1/4 |
| CP2780 | 6151922780 | 1/4 | 2,100 | NA | NA | 7.4 | 10 | 2.34 | 1.06 | 6.46 | 164 | 29 | 14 | <2.5 | - | 89 | 100 | 1/4 |

57



Screwdrivers accessories



| | TOOL'S MODEL | TUNE UP KIT PART NUMBER |
|--------|--------------|----------------------------|
| CP2136 | | 8940170493 |
| CP2141 | | 8940170516 |
| CP2780 | | 2050516763 |
| CP2623 | | 8940168330 |



| TOOL'S MODEL | DESIGNATION | PART NUMBER |
|--------------|-------------------------|-------------|
| CP8854 | MAGNETIC TOOL HOLDER | 904046664 |
| CP8854-2 | Max load 15 kg (33 lbs) | 8940166664 |

ACCESSORIES INCLUDED

| TOOL'S MODEL | ACCESSORIES DESCRIPTION | ACCESSORIES PART NUMBER |
|--------------|-------------------------|----------------------------|
| CP2136 | HOOK | 8940170488 |

OPTIONAL ACCESSORIES

REAR EXHAUST HOSE / NOISE REDUCER

| TOOL'S MODEL | ACCESSORIES DESCRIPTION | ACCESSORIES PART NUMBER |
|--------------|-------------------------|----------------------------|
| CP2780 | NOISE REDUCER KIT | 2050516493 |



SIDE HANDLE

| TOOL'S MODEL | ACCESSORIES DESCRIPTION | ACCESSORIES PART NUMBER |
|---------------|-------------------------|----------------------------|
| CP2780 | HANDLE KIT | 8940168856 |
| CP2780/CP2623 | SIDE HANDLE ASSY | 2050498553 |



STUD CLEANERS

| ACCESSORIES | ACCESSORIES DESCRIPTION | DIAM | ETRE | LEN | GTH | REPLACEMENT BRUSHES |
|-------------|-------------------------|---------|------|---------|-----|------------------------|
| PART NUMBER | ACCESSORIES DESCRIPTION | in. | mm | in. | mm | (SETS OF 5) |
| 8940168858 | Stud cleaner M20x37L | 13/16" | 20 | 1-7/16" | 37 | 8940169930 |
| 8940169793 | Stud cleaner M22x37L | 7/8" | 22 | 1-7/16" | 37 | 8940169931 |
| 8940169927 | Stud cleaner M20x60L | 13/16" | 20 | 2-3/8" | 60 | 8940169934 |
| 8940169928 | Stud cleaner M22x37L | 7/8" | 22 | 2-3/8" | 60 | 8940169935 |
| 8940169929 | Stud cleaner M24x37L | 15/16" | 24 | 2-3/8" | 60 | 8940169936 |
| 8940169795 | Stud cleaner M30x37L | 1-3/16" | 30 | 2-3/8" | 60 | 8940169933 |



DID YOU KNOW THAT
RUSTED BOLTS GREATLY
AFFECTS CLAMPING
FORCE? CLEAN BOLTS
ARE KEY TO PROPER
TIGHTENING. STUD CLEANERS
ARE THE IDEAL SOLUTION.
(PG. XX)

BALANCERS

| BALANCERS | LOAD | RANGE | STR | OKE | NET W | EIGHT | PART NUMBER | CP TOOLS |
|-----------|---------|---------|-----|------|-------|-------|--------------|--|
| BALANCERS | lb. | kg | ft. | mm | lb. | kg | PART NOWIDER | GF 100E3 |
| CP9911 | 0,8-2,2 | 0,4-1,0 | 5,2 | 1600 | 1,3 | 0,6 | 8941099110 | CP2036/CP2037/ CP2136/CP2141 |
| CP9912 | 2,2-4,4 | 1,0-2,0 | 5,2 | 1600 | 1,3 | 0,6 | 8941099120 | CP2041/CP2042/CP2755/ CP2765/CP2780 |



GRINDERS



Compact Die Grinders

Power capacity < 0.3hp (220W)

ø1/4 (6.4mm) - 22,500 RPM











COMPACT ANGLE DIE GRINDER FOR TIGHT AREAS

FEATURES AND BENEFITS

- 90° angle head allows flexibility in tight areas
- Compact and lightweight tool designed for easy maneuverability
- Built-in air regulator
- Includes 1/4" and 6 mm collets

ø1/4 (6.4mm) - 30,000 RPM









CP876

COMPACT AND LIGHTWEIGHT

FEATURES AND BENEFITS

- Compact and lightweight tool designed for easy maneuverability and ideal for limited space applications
- Front exhaust for better comfort
- Built-in air regulator
- Includes 1/4" and 6 mm collets

ø1/8 (3mm) - 60,000 RPM







CP9104Q

HIGH-SPEED FOR PRECISION WORK

FEATURES AND BENEFITS

- Very low noise level for greater comfort
- High free speed allows for greater accuracy
- Silencer hose included
- 3 mm and 1/8" collets included
- Lightweight for great maneuverability





CP9104Q Kit

See details on page 69



| MODEL | PART NUMBER | FREE SPEED | PO | WER | COLLET CAPACITY | AIR C | | NET W | /EIGHT | LEN | GTH | | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|---------|-------------|---------------|------|-----|--------------------|-------|-----|-------|--------|------|-----|------|-----------------------|-----------------|----------------|--------------|
| | | rpm | hp | W | in. (mm) | cfm | I/s | lb | kg | in. | mm | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP875 | T023995 | 22,500 | 0.3 | 220 | 1/4 (6.4mm) | 22 | 10 | 0.99 | 0.45 | 4.88 | 124 | 4.4 | 1.9 | 101 | 112 | 1/4 |
| CP876 | T023996 | 30,000 | 0.3 | 220 | 1/4 (6.4mm) | 23 | 11 | 0.75 | 0.34 | 4.76 | 121 | <2.5 | NA | 101.3 | 112 | 1/4 |
| CP9104Q | 6151959104 | 60,000 | 0.05 | 40 | 1/8 (3mm) | 6.8 | 3.2 | 0.44 | 0.2 | 5.24 | 133 | <2.5 | NA | 71 | 82 | 1/4 |

Compact Die Grinders & Die Grinders

0.2 to 0.63 hp (150 to 470 W)

ø1/4 (6.4mm) - 17,000 RPM











COMPACT FOR YOUR HARD TO REACH AREAS

FEATURES AND BENEFITS

- Rubber molded pistol grip and 2-fingered throttle to maximize operator control and to improve ergonomics
- Excellent for small area repair due to its short length and lightweight
- Adjustable power regulator for more precise job

ø1/4 (6.4mm) - 27,000 RPM









CP872

ECONOMIC COMPACT TOOL FOR GREAT EFFICIENCY

FEATURES AND BENEFITS

- Aluminum alloy body for better robustness
- Built-in air regulator & CP streamlined safety lever
- Includes 1/4" and 6 mm collets

also available page 111



CP872K

Same features as CP872 with Effimax hose 0,6m and 18" exhaust.

| MODEL | PART NUMBER | FREE SPEED | POV | VER | COLLET CAPACITY | AIR CONS. @LOAD | | | | LENGTH | | VIBRATION LEVEL ISO 28927 (M/S2) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|---------------|------|-----|--------------------|--------------------|-----|------|-------|--------|-----|-------------------------------------|-----|-----------------|----------------|--------------|
| | | rpm | hp | W | in. (mm) | cfm | I/s | lb | lb kg | | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP9107 | 6151959107 | 17,000 | 0.2 | 150 | 1/4 (6.4mm) | 18 | 8.5 | 1.54 | 0.7 | 4.72 | 120 | 3 | 1.9 | 81 | 92 | 1/4 |
| CP872 | T025373 | 27,000 | 0.63 | 470 | 1/4 (6.4mm) | 26 | 12 | 1.26 | 0.57 | 6.5 | 165 | <2.5 | NA | 100.9 | 111.9 | 1/4 |

Die Grinders







CP74 SERIES

ø1/4 (6.4mm) - 28,000 RPM

CHANGING A CARBIDE BURR HAS NEVER BEEN EASIER!

CP74 series, a 1/4" & 6mm die grinders range with spindle lock system which allows a high application coverage in the body shop and MRO market.

LOCKING SPINDLE SYSTEM, see details p. 64







FEATURES AND BENEFITS

- Burrs easily changeable allowing the operator to use only one wrench thanks to the new spindle lock system.
- Good surface grip avoiding the tool to slip once in operator's hand thanks to the handle's material (TPR) and ergonomics.
- High application coverage thanks to the multitude of heads (short & long straight, 120°, 90°)
- Less heat transfer between the motor and the sleeve thanks to the composite housing

| MODEL | PART NUMBER | FREE SPEED | PO\ | WER | COLLET CAPACITY | AIR CONS. @LOAD | | NET WEIGHT | | LENGTH | | VIBRATION LEVEL ISO 28927 (M/S2) | | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|---------------|------|-----|--------------------|--------------------|-----|------------|------|--------|-----|-------------------------------------|-----|-------------------|----------------|--------------|
| | | rpm | hp | W | in. (mm) | cfm | l/s | lb | kg | in. mm | | а | k | ISO 15744 - dB(A) | | in. |
| CP7405 | 8941074050 | 28,000 | 0.34 | 250 | 1/4 (6.4mm) | 2.1 | 1 | 1.1 | 0.5 | 6.93 | 176 | 3.6 | 1 | 76.2 | 87.2 | 1/8 |
| CP7406 | 8941074060 | 23,000 | 0.34 | 250 | 1/4 (6.4mm) | 2.1 | 1 | 1.32 | 0.6 | 6.42 | 163 | 5.4 | 1.3 | 78.1 | 89.1 | 1/4 |
| CP7408 | 8941074080 | 23,000 | 0.34 | 250 | 1/4 (6.4mm) | 2.1 | 1 | 1.37 | 0.62 | 7.68 | 195 | 4.3 | 0.9 | 78.6 | 89.6 | 1/4 |
| CP7410 | 8941074100 | 27,000 | 0.34 | 250 | 1/4 (6.4mm) | 2.1 | 1 | 1.43 | 0.65 | 9.76 | 248 | 4.9 | 1 | 76.1 | 87.1 | 1/4 |
| CP7411 | 8941074110 | 22,000 | 0.56 | 420 | 1/4 (6.4mm) | 3 | 1.4 | 1.54 | 0.7 | 7.09 | 180 | 3.1 | 0.8 | 80.7 | 91.7 | 1/4 |
| CP7412 | 8941074120 | 22,000 | 0.56 | 420 | 1/4 (6.4mm) | 3 | 1.4 | 2.43 | 1.1 | 12.99 | 330 | 2.6 | 0.8 | 80.4 | 80.4 | 1/4 |

Power capacity < 0.34hp (250W)

ø1/4 (6.4mm) - 23,000 RPM

























CP7408




ø1/4 (6.4mm) - 22,000 RPM

Power capacity < 0.56hp (420W)

ø1/4 (6.4mm) - 27,000 RPM



















CP7411

CP7412

CP7411K See details on page 69



Die Grinders


Burrs easily changeable

Spindle lock system (rotate and push mechanism)

No need to use 2 spanner wrenches to change the carbide burr! (One-hand operation)



High application coverage

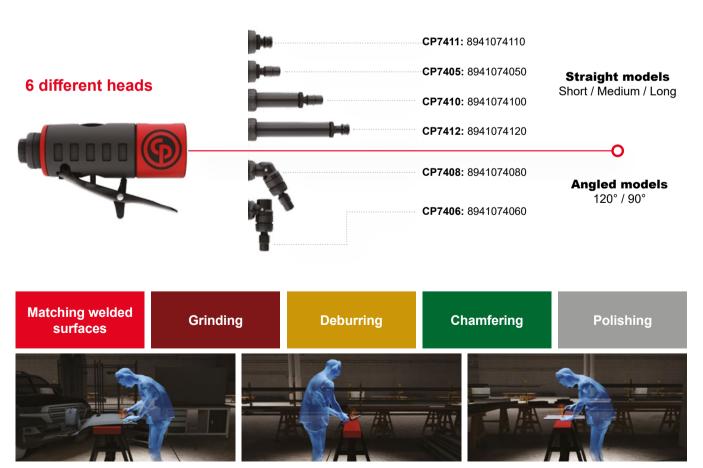

Angle Grinders







CP75 SERIES

Wheel capacity 4"/ 4,5"/ 5"

POWERFUL AND DURABLE

For operators working in a variety of applications such as sanding with flap discs, grinding, and cutting who are looking for powerful and durable tools, CP7540/45/50 Series is the angle grinder that you need.





FEATURES AND BENEFITS

- High durability thanks to its high quality bevel gears and governed motor
- High security with its robust steel keyless adjustable wheel rotative guard and its CP safety Lever
- Streamline composite handle (right or left) and composite grip for better operator comfort
- Rear exhaust (exhaust hose included)
- 360° swivel air inlet

See accessories page 70

| MODEL | PART NUMBER | FREE SPEED | POV | VER | MAX V CAPA | | SPINDLE THREAD | AIR C | | NET W | EIGHT | LEN | GTH | | ON LEVEL 927 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|----------|-------------|---------------|------|-----|---------------|-----|-------------------|-------|-----|-------|-------|-------|-----|-----|------------------------|-----------------|----------------|--------------|
| | | rpm | hp | W | in. | mm | in. | cfm | l/s | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7540-C | 8941075401 | 12,000 | 1.13 | 840 | 4 | 100 | 3/8-24 UNF | 40 | 18 | 3.53 | 1.6 | 10.63 | 270 | 6.5 | 3 | 85 | 96 | 1/4 |
| CP7545-C | 8941075451 | 12,000 | 1.13 | 840 | 4-1/2 | 115 | 3/8-24 UNF | 40 | 18 | 3.53 | 1.6 | 10.63 | 270 | 7 | 2.1 | 85 | 96 | 1/4 |
| CP7545-B | 8941075452 | 12,000 | 1.13 | 840 | 4-1/2 | 115 | 5/8-11 UNC | 40 | 18 | 3.53 | 1.6 | 10.63 | 270 | 7 | 2.1 | 85 | 96 | 1/4 |
| CP7550-C | 8941075501 | 12,000 | 1.13 | 840 | 5 | 125 | 3/8-24 UNF | 40 | 18 | 3.53 | 1.6 | 10.63 | 270 | 7 | 2.1 | 85 | 96 | 1/4 |
| CP7550-B | 8941075502 | 12,000 | 1.13 | 840 | 5 | 125 | 5/8-11 UNC | 40 | 18 | 3.53 | 1.6 | 10.63 | 270 | 7 | 2.1 | 85 | 96 | 1/4 |
| CP7550-A | 8941075503 | 12,000 | 1.13 | 840 | 5 | 125 | M14x2 | 40 | 18 | 3.53 | 1.6 | 10.63 | 270 | 7 | 2.1 | 85 | 96 | 1/4 |

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Angle Grinders

0.2 hp (150 W) Angle Wheel Grinders 2"









CP7500D

COMPACT CUTTING & GRINDING

FEATURES AND BENEFITS

- Rubber handle grip & side exhaust for better operator comfort
- Lock off safety lever & full 180° protective guard for better security
- High versatility angle grinder, designed for grinding and cutting
- Cut-off tool adapter included



| MODEL | PART NUMBER | FREE SPEED | POV | POWER | | MAX WHEEL CAPACITY | | | AIR CONS. @LOAD | | NET WEIGHT | | LENGTH | | VIBRATION LEVEL ISO 28927 (M/S2) | | SOUND POWER | |
|---------|-------------|---------------|-----------|----------|-----|-----------------------|-------------------|----------|--------------------|-----|------------|-------------|-----------|------|-------------------------------------|----------|-------------------------|-----|
| CP7500D | 8941075001 | rpm 22,000 | hp 0.2 | W 150 | in. | mm 50 | in. 3/8-24 UNF | cfm 8 | 1/s 3.8 | 1.3 | kg 0.59 | in. 5.51 | mm 140 | 19.9 | 6.7 | ISO 157- | 44 - dB(A) 92 | in. |

<0.8 hp (600 W) Angle Wheel Grinders 4" to 5"















CP9122BR

CP9121BR

LIGHTWEIGHT AND EASY HANDLING

FEATURES AND BENEFITS

- Helical bevel gear design & aluminum alloy housing for high durability
- Keyless adjustable protective guard for better security
 Ergonomic side handle

also available page 111

CP9120CRN

Same features as CP9120CR with 3/8"-24 thread, 4" wheel for North America market only

CP9122CR

Same features as CP9122BR with 3/8" - 24 spindle thread

CP9121CR

Same features as CP9121BR with 3/8" - 24 spindle thread

CP9121AR

Same features as CP9121BR with M14 spindle thread - Not for ANSI

| MODEL | PART NUMBER | FREE SPEED | PO | WER | MAX \ | | SPINDLE THREAD | AIR C | | NET W | EIGHT | LEN | IGTH | | ON LEVEL 927 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|-----------|-------------|---------------|-----|-----|-------|-----|-------------------|-------|-----|-------|-------|------|------|------|------------------------|-----------------|----------------|--------------|
| | | rpm | hp | W | in. | mm | in. | cfm | I/s | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP9120CR | 6151952120 | 12,000 | 0.8 | 600 | 4 | 100 | 3/8-24 UNF | 23 | 11 | 4.19 | 1.9 | 9.17 | 233 | 5.3 | 1.6 | 84 | 95 | 1/4 |
| CP9120CRN | 8941091200 | 12,000 | 0.8 | 600 | 4 | 100 | 3/8-24 UNF | 23 | 11 | 4.19 | 1.9 | 9.17 | 233 | 5.3 | 1.6 | 84 | 95 | 1/4 |
| CP9121CR | 6151952121 | 12,000 | 0.8 | 600 | 5 | 125 | 3/8-24 UNF | 25 | 12 | 4.63 | 2.1 | 9.45 | 240 | 11.2 | 3.4 | 84 | 95 | 1/4 |
| CP9122CR | 6151952122 | 12,000 | 0.8 | 600 | 4-1/2 | 115 | 3/8-24 UNF | 29 | 14 | 4.19 | 1.9 | 9.17 | 233 | 5.4 | 1 | 84 | 95 | 1/4 |
| CP9121BR | 6151957221 | 12,000 | 0.8 | 600 | 5 | 125 | 5/8-11 UNC | 27 | 13 | 4.63 | 2.1 | 9.45 | 240 | 8.6 | 4.6 | 84 | 95 | 1/4 |
| CP9122BR | 6151957222 | 12,000 | 0.8 | 600 | 4-1/2 | 115 | 5/8-11 UNC | 29 | 14 | 4.19 | 1.9 | 9.17 | 233 | 8.6 | 4.6 | 84 | 95 | 1/4 |
| CP9121AR | 6151957321 | 12,000 | 0.8 | 600 | 5 | 125 | M14x2 | 27 | 13 | 4.63 | 2.1 | 9.45 | 240 | 6.7 | 2.2 | 84 | 95 | 1/4 |

Angle Grinders & Cut Off Tool

<1.14 hp (850 W) Angle Wheel Grinders 7"









CP9123

ROBUST CONSTRUCTION

FEATURES AND BENEFITS

- 7" (180 mm) angle grinder with 5/8"-11 spindle thread
- Aluminum alloy housing for high durability
- Great operator comfort with its rubber handle grip

also available page 111

| MODEL | PART NUMBER | FREE SPEED | PO | WER | MAX V CAPA | VHEEL | SPINDLE THREAD | AIR C | | NET W | /EIGHT | LEN | GTH | | ON LEVEL 127 (M/S2) | | SOUND POWER | |
|--------|-------------|---------------|------------|----------|---------------|-----------|-------------------|-----------|-----------|-------|--------|-----|-----------|-----|------------------------|----------|-------------------|---------|
| CP9123 | 6151959123 | rpm 7,500 | hp 1.14 | W 850 | in. | mm 180 | in. 5/8-11 UNC | cfm 24 | l/s 11 | 7.5 | 3.4 | in. | mm 340 | 4.3 | k 1.3 | ISO 1574 | 44 - dB(A) 104 | in. 3/8 |

Grinders accessories

Kits



CP9104Q Kit

Part No. 6151950104

Kit includes:

- (1) CP9104Q Pencil grinder
- (5) Mounted points 3mm
- (5) Carbide burrs 3mm
- (1) 1/8" and 3mm collets
- (1) 2.4mm collet



CP7411K

Part no: 8941074111

Kit includes:

- (1) CP7411 (with 6mm collet)
- (1) 1/4" collet
- (1) Spanner
- (5) 6mm mounted points
- (5) 3mm mounted points



CP7500D Kit

Part No. 8941075002

Kit includes:

- (1) 2" (51mm) Angle Grinder / **Cut-off Tool**
- (3) 2" (51mm) grinding wheel 60 Grit
- (3) 2" (51mm) grinding wheel 80 Grit
- (3) 2" (51mm) grinding wheel 120 Grit
- (5) 2" (51mm) cutting wheel
- (1) Pin wrench
- (1) Spanner
- (1) Protective glasses



CP872K

Part no: T024293

Kit includes:

- (1) Hose whip Effimax M1/4 NPT 3/8 10mm 0,6m
- Overhose-exhaust 18"



CP875 Kit

Part No. 8941108751

Kit includes:

- (1) CP875 Grinder
- (1) 2" (51mm) backing pad
- (1) 2" (51mm) backing pad
- (2) 2" (51mm) coarse surface prep pad
- (2) 2" (51mm) medium surface prep pad
- (2) 2" (51mm) fine surface prep pad
- (2) 2" (51mm) 50 grit sanding disc
- (2) 2" (51mm) 36 grit sanding disc
- (2) 2" (51mm) 24 grit sanding disc

Grinders accessories

CARBIDE BURR

SPEED GUIDE

Recommended Operating speeds. All rpm rating in the table below are listed as thousand

| BURR HEAD DIAMETER | MAX OPERATING SPEED | ALUMINUM, PLASTIC | | BRASS, C CAST IRON | | UNHARDEN | NED STEEL | HARDENED STEEL, STAINLESS STEEL, NIMONIC ALLOYS | | |
|--------------------|---------------------|-------------------|------------------------|-----------------------|------------------------|-------------|------------------------|--|------------------------|--|
| | | Speed Range | Recomm. Start Point | Speed Range | Recomm. Start Point | Speed Range | Recomm. Start Point | Speed Range | Recomm. Start Point | |
| 3 mm (1/8") | 100 | 60-80 | 65 | 45-80 | 65 | 60-80 | 80 | 60-80 | 80 | |
| 6 mm (1/4") | 65 | 15-60 | 40 | 22-60 | 45 | 45-60 | 50 | 30-45 | 40 | |
| 10 mm (3/8") | 55 | 10-50 | 25 | 15-40 | 30 | 30-40 | 30 | 19-30 | 25 | |
| 12 mm (1/2") | 35 | 7-30 | 20 | 11-30 | 25 | 22-30 | 25 | 15-22 | 20 | |
| 16 mm (5/8") | 25 | 6-20 | 15 | 9-20 | 20 | 18-20 | 20 | 12-18 | 15 | |
| 20 mm (3/4") | 20 | 5-21 | 10 | 8-17 | 12 | 15-17 | 15 | 10-15 | 10 | |
| 25 mm (1") | 15 | 4-13 | 8 | 6-13 | 10 | 10-13 | 10 | 7-11 | 8 | |

Recommended speeds are based on standard shank length of 45 mm / (1-3/4") max overhang of 10 mm (3/8") Maximum recommended operating speeds for extended length shanks is 15,000 rpm

CP offers a wide range of products that will cover virtually every application on industry.

CP OFFERS THREE DIFFERENT TYPES OF CUT



DOUBLE CUT

The most common on the market, to be used on hard metal application



FOUNDRY CUT

When high performance and durability is a must, to be used on hard metal application



ALUMINUM CUT

To be used on all soft metals

BURR SHAPES



Cylinder w/o endcut



Cylinder with endcut



Ball nosed cylinder



Ball



Oval



Ball nosed tree



Pointed Tree



Flame



Ball nose cone



Cone



Inverted Cone

Grinders

Grinders accessories

CARBIDE BURR KITS

DOUBLECUT



1/8" Ø SHANK

Part No. 8940172240

Kit includes:

- 10 pieces
- 1/8" head for imperial shapes: A, B, C, D, E, F, G, L, M, N



3mm Ø SHANK

Part No. 8940171785

Kit includes:

- 10 pieces
- 3mm head for metric shapes: A, B, C, D, E, F, G, L, M, N



1/4" Ø SHANK

Part No. 8940172242

Kit includes:

- 5 pieces
- 3/8" head; shapes: B, C. - 1/2" head; shapes: C, F, L



6mm Ø SHANK

Part No. 8940171787

Kit includes:

- 5 pieces
- 10mm head; shapes: B, C.
- 12mm head; shapes: C, F, L





1/4" Ø SHANK

Part No. 8940172241

Kit includes:

- 5 pieces
- 1/2" head for imperial shapes: B, C, F, G, L



6mm Ø SHANK

Part No. 8940171786

Kit includes:

- 5 pieces
- 10mm head; shapes: B, C.
- 12mm head; shapes: C, F, L



1/4" Ø SHANK

Part No. 8940172243

Kit includes:

- 5 pieces
- 3/8" head; shapes: B, C.
- 1/2" head; shapes: C, F, L



6mm Ø SHANK

Part No. 8940171788

Kit includes:

- 5 pieces
- 10mm head; shapes: B, C.
- 12mm head; shapes: C, F, L

ACCESSORIESINCLUDED

FOR CP7500D/CP7500DK



| ACCESSORY'S DESCRIPTION | MAX SPEED | ACCESSORY'S PART NUMBER |
|------------------------------------|-----------|-------------------------|
| 2" Grinding Wheel 60 Grit (5 pcs) | 20,000 | 8940162768 |
| 2" Grinding Wheel 80 Grit (5 pcs) | 20,000 | 8940162769 |
| 2" Grinding Wheel 120 Grit (5 pcs) | 20,000 | 8940162770 |
| 2" Cutting Wheel (5 pcs | 20,000 | 8940164490 |
| Spanner | | 8940162759 |
| Nut | | 8940162765 |

COLLET*



| TOOL'S MODEL | COLLET CAPACITY | COLLET'S PART NUMBER |
|---|--------------------|----------------------|
| CP7405/CP7406/CP7408/CP7410 | 3mm | 2050484292 |
| CP9104Q | 3mm | 2050486503 |
| CP875/CP876/CP7405/CP7406/CP7408/CP7410 | 6mm | C139289 |
| CP875/CP876 | 1/8" | 2050516623 |
| CP9104Q | 1/8" | 2050507873 |
| CP7405/CP7406/CP7408/CP7410 | 1/4" | 2050484293 |
| CP875/CP876 | 1/4" | C138727 |

^{*} COLLET GRINDER ACCESSORIES aluminum

Oxide Mounted Points are available in red grades. Red grades are suitable for grinding high tensible materials such as ordinary and alloy steels, high speed steel and annealed malleable iron.

RECOMMENDEDACCESSORIES

EXHAUST HOSE



| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|---|------------------------------------|-------------------------|
| CP872 | DUS 35 DUPLEX HOSE SYSTEM 1/4" BSP | 8955000015 |
| CP7540-CN/-C, CP7545-C/-B, CP7550-C/-B/-A | Hose kit | 8940174834 |
| CP9120CRN | Rear exhaust hose | 2050516493 |

ADAPTOR



| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|---|------------------------------------|-------------------------|
| CP872 | DUS 35 DUPLEX HOSE SYSTEM 1/4" BSP | 8955000015 |
| CP7540-CN/-C, CP7545-C/-B, CP7550-C/-B/-A | Hose kit | 8940174834 |
| CP9120CRN | Rear exhaust hose | 2050516493 |

Grinders

Grinders accessories

GUARD - FLANGE 1& FLANGE NUT - SPANNER 1 KEY

| TOOL'S MODEL | SPARE'S PART NUMBER | ACCESSORY'S PART NUMBE |
|--------------------|--|------------------------|
| | 4-1/2"(114mm) Disc Guard | 2050534023 |
| | Flange for 3/8" - 24UNF | 2050533943 |
| | Flange for 5/8" - 11UNF | 6155031600 |
| 00010000 | Flange Nut for 3/8" - 24UNF | 2050533973 |
| CP9122BR/CR | Flange Nut for 5/8" - 11UNF | 6155020780 |
| | Spanner | 2050534033 |
| | Pin wrench | 2050486673 |
| | Side Handle | 2050524063 |
| | 5" (125mm) Dics guard | 2050534013 |
| | Flange for M14x2 | 6155031590 |
| | Flange for 3/8" - 24UNF | 2050533943 |
| | Flange for 5/8" - 11UNF | 6155031600 |
| | Flange Nut for M14x2 | 6155020770 |
| CP9121AR/BR/CR | Flange Nut for 3/8" - 24UNF | 2050533973 |
| | Flange Nut for 5/8" - 11UNF | 6155020780 |
| | Spanner | 2050534033 |
| | Pin wrench | 2050486673 |
| | Side Handle | 2050524063 |
| | Complete Sanding Kit Ø 125mm pad (thread 3/8"x24UNF) | 2050498533 |
| | Disc Guard | 2050500973 |
| | Flange | 2050500963 |
| CP9123 | Flange Nut | 2050500983 |
| | Spanner | 2050501193 |
| | Hex Key spannner | 2050501213 |
| CP7540-CN | Flange Kit | 8940173435 |
| CP7540-C | Flange Kit | 8940173436 |
| CP7545-C, CP7550-C | Flange Kit | 8940173437 |
| CP7550-A | Flange Kit | 8950251317 |
| CP7545-B, CP7550-B | Flange Kit | 8940173438 |
| · | Rear Flange (3/8"-24) | 2050556483 |
| CP9120CRN | Front Flange nut (3/8"-24) | 2050556493 |
| | Flange nut (3/8"-24) | 2050556513 |

| Notes | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

SANDERS



Random Orbital Sanders - Pad ø 3" (75 mm)

Orbit Size









CP7225-3

POWERFUL & COMFORTABLE

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- 2 sponges (yellow = Hard / white = soft) or 1 polishing foam
- Powerful motor 0.29 hp (210 W) for vertical and horizontal applications
- 3"(75 mm) / 6"(150 mm) random orbital with palm sander with 3/32"(2.5mm) orbit for final sanding, finishing & prepolishing



CP7255E-3

POWERFUL & COMFORTABLE

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- Productivity increased with low vibration level and low noise level
- Powerful motor 0.3 hp (210 W) for vertical and horizontal applications
- 3"(75 mm) / 6"(150 mm) random orbital with palm sander, 3/16" (5mm) orbit for surface preparation from body filler to paint primer

CP7225E-3

Same features as CP7225-3 in Hook&Loop (H&L) pad

CP7225CVE-3

Same features as CP7225-3 with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad

CP7255CVE-3

Same features as CP7255E-3 with central vacuum dust extraction (CV)





Eco change motor

| MODEL | PART NUMBER | FREE SPEED | | BITAL ZE | POV | VER | PAD | SIZE | PAD TYPE | VAC | SPINDLE THREAD | AIR (AT FREE | | AIR C | | NET W | /EIGHT | VIBRA LE\ | /EL | SOUND PRESS. | | |
|-------------|-------------|---------------|------|-------------|------|-----|-----|------|-------------|----------------|-------------------|------------------|-----|-------|-----|-------|--------|--------------|-----|-----------------|-----------|-----|
| | | rpm | in. | mm | hp | W | in. | mm | | | in. | cfm | I/s | cfm | I/s | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7225-3 | 8941072257 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 3 | 75 | PSA | Non vacuum | 5/16-24 UNF | 10 | 5 | 16 | 7.8 | 1.39 | 0.63 | 2.5 | 1.3 | 76 | 87 | 1/4 |
| CP7225E-3 | 8941272257 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 3 | 75 | H&L | Non vacuum | 5/16-24 UNF | 10 | 5 | 16 | 7.8 | 1.39 | 0.63 | 2.5 | 1.3 | 76 | 87 | 1/4 |
| CP7225CVE-3 | 8941272258 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 3 | 75 | H&L | Central vacuum | 5/16-24 UNF | 10 | 5 | 16 | 7.8 | 1.46 | 0.66 | 2.5 | 1.3 | 76 | 87 | 1/4 |
| CP7255E-3 | 8941272557 | 12,000 | 3/16 | 5 | 0.28 | 210 | 3 | 75 | H&L | Non vacuum | 5/16-24 UNF | 10 | 5 | 16 | 7.8 | 1.39 | 0.63 | 4.4 | 1.5 | 76 | 87 | 1/4 |
| CP7255CVE-3 | 8941272558 | 12,000 | 3/16 | 5 | 0.28 | 210 | 3 | 75 | H&L | Central vacuum | 5/16-24 UNF | 10 | 5 | 16 | 7.8 | 1.46 | 0.66 | 4.4 | 1.5 | 76 | 87 | 1/4 |

Random Orbital Sanders - Pad ø 5" (125 mm)



ERGONOMIC & POWERFUL

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- Productivity increased with low vibration level and low noise level
- Powerful motor 0.3 hp (210 W) for vertical and horizontal applications
- 5" (125 mm) random orbital with palm sander with 3/16" (5mm) orbit for surface preparation from body filler to paint primer

CP3511

Same features as CP3510 in PSA pad





See accessories page 85

| MODEL | PART NUMBER | FREE SPEED | | SITAL ZE | POV | WER | PAD | SIZE | PAD TYPE | VAC | SPINDLE THREAD | AIR C AT FREE | | AIR C | | NET W | /EIGHT | LE | ATION VEL 27 (M/S2) | | SOUND POWER | |
|--------|-------------|---------------|------|-------------|------|-----|-----|------|-------------|----------------|-------------------|------------------|-----|-------|-----|-------|--------|----|---------------------------|----------|----------------|-----|
| | | rpm | in. | mm | hp | W | in. | mm | | | in. | cfm | l/s | cfm | l/s | lb | kg | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP3510 | 6151933510 | 12,000 | 3/16 | 5 | 0.28 | 210 | 5 | 125 | H&L | Non vacuum | 5/16-24 UNF | 19 | 9.2 | 16 | 7.6 | 1.63 | 0.74 | 3 | 1.3 | 81 | 88.6 | 1/4 |
| CP3511 | 6151933511 | 12,000 | 3/16 | 5 | 0.28 | 210 | 5 | 125 | PSA | Non vacuum | 5/16-24 UNF | 19 | 9.2 | 16 | 7.6 | 1.63 | 0.74 | 3 | 1.3 | 81 | 92.6 | 1/4 |
| CP3512 | 6151933512 | 12,000 | 3/16 | 5 | 0.28 | 210 | 5 | 125 | H&L | Self vacuum | 5/16-24 UNF | 19 | 9.2 | 16 | 7.6 | 1.72 | 0.78 | 3 | 1.3 | 81 | 90.8 | 1/4 |
| CP3514 | 6151933514 | 12,000 | 3/16 | 5 | 0.28 | 210 | 5 | 125 | H&L | Central vacuum | 5/16-24 UNF | 19 | 9.2 | 16 | 7.6 | 1.74 | 0.79 | 3 | 1.3 | 81 | 87.2 | 1/4 |

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Random Orbital Sanders - Pad ø 6" (150 mm)











CP7215

POWERFUL & COMFORTBALE FOR SANDING APPLICATIONS

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- 1 polishing cream (250ml) compatible with all headlights composite and paints
- Powerful motor 0.29 hp (210 W) for vertical and horizontal applications



CP7225SVE

CP7255CVE

POWERFUL & COMFORTABLE





Eco change motor

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- 2 sponges (yellow = Hard / white = soft) or 1 polishing foam
- Powerful motor 0.29 hp (210 W) for vertical and horizontal applications
- 3"(75 mm) / 6"(150 mm) random orbital with palm sander with 3/32"(2.5mm) orbit for final sanding, finishing & pre-polishing

CP72..E

Same features as CP7215/25/55 in Hook&Loop (H&L) pads

CP72..SVE

Same features as CP7215/25/55 with self vacuum (SV) model in Hook&Loop (H&L) pad

CP72..CV & CVE

Same features as CP7215/25/55 with central vacuum dust extraction (CV) model in PSA & Hook&Loop (H&L) pad

| | MODEL | PART NUMBER | FREE SPEED | ORBI SIZ | | POV | VER | PAD S | SIZE | PAD TYPE | VAC | SPINDLE THREAD | AIR C AT FREE | ONS. E SPEED | AIR C | | NET W | /EIGHT | VIBRA LEV ISO 2892 | /EL | SOUND PRESS. | | |
|----------|-----------|-------------|---------------|-------------|-----|------|-----|-------|------|-------------|----------------|-------------------|------------------|-----------------|-------|-----|-------|--------|--------------------------|-----|--------------|-----------|-----|
| | | | rpm | in. | mm | hp | W | in. | mm | | | in. | cfm | l/s | cfm | l/s | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| ī | CP7215 | 8941072151 | 12,000 | 3/8 | 10 | 0.28 | 210 | 6 | 150 | PSA | Non vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.74 | 0.79 | 8.5 | 2.9 | 81 | 92 | 1/4 |
| ORBITAL | CP7215E | 8941272151 | 12,000 | 3/8 | 10 | 0.28 | 210 | 6 | 150 | H&L | Non vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.74 | 0.79 | 5.7 | 1.8 | 81 | 87 | 1/4 |
| ORB | CP7215SVE | 8941272152 | 12,000 | 3/8 | 10 | 0.28 | 210 | 6 | 150 | H&L | Self vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.81 | 0.82 | 5.7 | 1.8 | 81 | 92 | 1/4 |
| 8 | CP7215CVE | 8941272153 | 12,000 | 3/8 | 10 | 0.28 | 210 | 6 | 150 | H&L | Central vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.83 | 0.83 | 5.7 | 1.8 | 81 | 92 | 1/4 |
| | CP7255 | 8941072551 | 12,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | PSA | Non vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.74 | 0.79 | 8.2 | 2.3 | 81 | 92 | 1/4 |
| , î | CP7255E | 8941272551 | 12,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | H&L | Non vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.74 | 0.79 | 5.1 | 1.8 | 81 | 92 | 1/4 |
| ORBITAL | CP7255CV | 8941072553 | 12,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | PSA | Central vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.83 | 0.83 | 8.2 | 2.3 | 81 | 92 | 1/4 |
| ORB | CP7255CVE | 8941272553 | 12,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | H&L | Central vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.83 | 0.83 | 5.1 | 1.8 | 81 | 92 | 1/4 |
| έ | | 8941072552 | 12,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | PSA | Self vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.81 | 0.82 | 8.2 | 2.3 | 81 | 92 | 1/4 |
| | CP7255SVE | 8941272552 | 12,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | H&L | Self vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.81 | 0.82 | 5.1 | 1.8 | 81 | 92 | 1/4 |
| | CP7225 | 8941072251 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 6 | 150 | PSA | Non vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.74 | 0.79 | 7.7 | 3.2 | 81 | 92 | 1/4 |
| <u>,</u> | CP7225CV | 8941072253 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 6 | 150 | PSA | Central vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.83 | 0.83 | 7.7 | 3.2 | 81 | 92 | 1/4 |
| ORBITAL | CP7225E | 8941272251 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 6 | 150 | H&L | Non vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.74 | 0.79 | 3.7 | 2.1 | 81 | 92 | 1/4 |
| ORBI | | 8941272252 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 6 | 150 | H&L | Self vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.81 | 0.82 | 3.7 | 2.1 | 81 | 92 | 1/4 |
| • | CP7225CVE | 8941272253 | 12,000 | 3/32 | 2.5 | 0.28 | 210 | 6 | 150 | H&L | Central vacuum | 5/16-24 UNF | 17 | 8 | 16 | 7.6 | 1.83 | 0.83 | 3.7 | 2.1 | 81 | 92 | 1/4 |

2 hand Random Orbital Sanders - Pad 6" (150 mm)









CP7255H

POWERFUL & COMFORTABLE

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- Productivity increased with low vibration level and low noise level
- Powerful motor 0.3 hp (210 W) for vertical and horizontal applications
- 3"(75 mm) / 6"(150 mm) random orbital with palm sander, 3/16" (5mm) orbit for surface preparation from body filler to paint primer



CP7215H

POWERFUL & COMFORTBALE FOR SANDING APPLICATIONS

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- 1 polishing cream (250ml) compatible with all headlights composite and paints
- Powerful motor 0.29 hp (210 W) for vertical and horizontal applications



CP870

DUAL ACTION SANDER

FEATURES AND BENEFITS

- General-duty sander with rotary or random orbital options
- Insulated grip and lock off throttle to prevent accidental start ups
- Power regulator for precise control
- PSA sanding pad





Eco change motor

CP7255HCVE

Same features as CP7255H with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad

CP7215HCVE

Same features as CP7215H with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad



| | MODEL | PART NUMBER | FREE SPEED | | SITAL ZE | POV | VER | PAD | SIZE | PAD TYPE | VAC | SPINDLE THREAD | AIR C | ONS. E SPEED | AIR C | ONS. OAD | NET W | EIGHT | | ATION VEL 27 (M/S2) | SOUND PRESS. | | |
|---------------|------------|--------------------------|---------------|------|-------------|------|-----|-----|------|-------------|----------------|-------------------|-------|-----------------|-------|-------------|-------|-------|------|---------------------------|--------------|-----------|-----|
| | | | rpm | in. | mm | hp | W | in. | mm | | | in. | cfm | I/s | cfm | l/s | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| ITAL /16" | CP7255H | 8941072554 8941272555 | 11,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | PSA | Non vacuum | 5/16-24 UNF | 17 | 8 | 18 | 8.5 | 1.94 | 0.88 | 5.4 | 2.4 | 81 | 92 | 1/4 |
| ORB Ø3 | CP7255HCVE | 8941272555 | 11,000 | 3/16 | 5 | 0.28 | 210 | 6 | 150 | H&L | Central vacuum | 5/16-24 UNF | 17 | 8 | 18 | 8.5 | 1.94 | 0.88 | 3.1 | 5.2 | 83 | 94 | 1/4 |
| | | | | | | | | | | | | | | | | | | | | | | | |
| 31TAI 3/8" | CP7215HCVE | 8941272155 T023990 | 11,000 | 3/8 | 10 | 0.28 | 210 | 6 | 150 | H&L | Central vacuum | 5/8-24 UNF | 17 | 8 | 18 | 8.5 | 2.03 | 0.92 | 4.4 | 2.8 | 86 | 97 | 1/4 |
| ORE 8 | € CP870 | T023990 | 10,000 | 3/8 | 10 | - | - | 6 | 150 | PSA | Non vacuum | 5/8-24 UNF | 18 | 8.5 | 16 | 7.6 | 4.25 | 1.93 | 13.6 | 4.3 | 83 | 94 | 1/4 |

Sanders

Pad 3" (75 mm) - Jitterbug Sanders













CP7263E

CP7264E

CP7266E

ERGONOMIC & POWERFUL

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- Productivity increased with low vibration level and low noise level
- Powerful motor 0.3 hp (210 W) for vertical and horizontal applications
- Rectangle, delta random orbital with palm sander with 3/32"(2.5mm) orbit for surface preparation from body filler to paint primer



CP7263CVE

Same features as CP7263E with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad

CP7264CVE

Same features as CP7264E with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad

CP7266CVE

Same features as CP7266E with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad

| MODEL | PART NUMBER | FREE SPEED | ORB SIZ | | POV | VER | PAD | SIZE | PAD TYPE | VAC | | CONS. E SPEED | AIR C | | NET W | /EIGHT | | ATION /EL 27 (M/S2) | SOUND PRESS. | | |
|-----------|-------------|---------------|------------|-----|------|-----|-------------|--------|-------------|----------------|-----|------------------|-------|-----|-------|--------|-----|---------------------------|-----------------|-----------|-----|
| | | rpm | in. | mm | hp | W | in. | mm | | | cfm | l/s | cfm | l/s | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7264E | 8941072640 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 2-3/4x7-3/4 | 70x198 | H&L | Non vacuum | 18 | 8.5 | 18 | 8.5 | 1.54 | 0.7 | 9.2 | 3.4 | 78 | 89 | 1/4 |
| CP7263E | 8941072650 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 3x4-1/4 | 74x109 | H&L | Non vacuum | 18 | 8.5 | 18 | 8.5 | 1.39 | 0.63 | 9.4 | 3 | 78 | 89 | 1/4 |
| CP7266E | 8941072660 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 3-1/4x5 | 80x130 | H&L | Non vacuum | 18 | 8.5 | 18 | 8.5 | 1.46 | 0.66 | 7.3 | 2.9 | 78 | 89 | 1/4 |
| CP7264CVE | 8941172640 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 2-3/4x7-3/4 | 70x198 | H&L | Central vacuum | 18 | 8.5 | 18 | 8.5 | 1.65 | 0.75 | 7.2 | 2.1 | 78 | 89 | 1/4 |
| CP7263CVE | 8941172650 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 3x4-1/4 | 74x109 | H&L | Central vacuum | 18 | 8.5 | 18 | 8.5 | 1.5 | 0.68 | 8.9 | 2.1 | 78 | 89 | 1/4 |
| CP7266CVE | 8941172660 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 3-1/4x5 | 80x130 | H&L | Central vacuum | 18 | 8.5 | 18 | 8.5 | 1.57 | 0.71 | 7.7 | 2.8 | 78 | 89 | 1/4 |

0.28 hp (210 W) - Jitterbug Sanders





CP7267E

ERGONOMIC & POWERFUL

FEATURES AND BENEFITS

- Operator comfort with ergonomic palm shape in soft grip for perfect control
- Productivity increased with low vibration level and low noise level
- Powerful motor 0.3 hp (210 W) for vertical and horizontal applications
 Rectangle, delta random orbital with palm sander with 3/32"(2.5mm) orbit for surface preparation from body filler to paint primer



CP7267CVE

Same features as CP7267E with central vacuum dust extraction (CV) model in Hook&Loop (H&L) pad

| MODEL | PART NUMBER | FREE SPEED | ORB SIZ | ITAL ZE | POV | VER | PAD | SIZE | PAD TYPE | VAC | AIR C AT FREE | ONS. SPEED | AIR C @LC | ONS. OAD | NET W | /EIGHT | VIBRA LEV ISO 2892 | ATION /EL 27 (M/S2) | SOUND PRESS. | | |
|-----------|-------------|---------------|------------|------------|------|-----|-------------|---------|-------------|----------------|------------------|---------------|--------------|-------------|-------|--------|--------------------------|---------------------------|-----------------|-----------|-----|
| | | rpm | in. | mm | hp | W | in. | mm | | | cfm | I/s | cfm | I/s | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7267E | 8941072670 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 3-7/8x5-5/8 | 100x144 | H&L | Non vacuum | 18 | 8.5 | 18 | 8.5 | 1.46 | 0.66 | 9.6 | 3.2 | 78 | 89 | 1/4 |
| CP7267CVE | 8941172670 | 10,000 | 3/32 | 2.5 | 0.28 | 210 | 3-7/8x5-5/8 | 100x144 | H&L | Central vacuum | 18 | 8.5 | 18 | 8.5 | 1.57 | 0.71 | 9 | 3.7 | 78 | 89 | 1/4 |

Mini Size - Pad ø 5" (125 mm), Pad ø 7" (180 mm) & ø 8" (200 mm)

Orbit Size









CP9778

THE PARTNER FOR YOUR FAST AND PRECISE APPLICATIONS

FEATURES AND BENEFITS

- Standard-duty hi-speed sander with 5" (125 mm) pad
- Built-in air regulator and variable speed throttle
- Rugged, energy efficient 0.5 hp (375 W) motor





CP7265S

POWERFUL AND ERGONOMIC PALM SANDERS

FEATURES AND BENEFITS

- Operator comfort & control with soft grip, tear drop design & ergonomic palm shape
- Powerful with 0.29 hp (210 W) motor
- Shut-off and speed control switch





CP7269S

VERSATILE POLISHING

FEATURES AND BENEFITS

- Powerful motor 0.7 hp (500 W) great productivity
- Hardened and ground spiral bevel gears
- Speed control switch for better job precision
- Delivered with 7" (178 mm) pad and with 8" (200 mm) "Flex-edge" polishing pad (only for the polisher)

CP7969P

Sames features as CP7269S, delivered with 7" (178 mm) pad and with 8" (200 mm) "flex-edge" polishing pad

| MODEL | PART NUMBER | FREE SPEED | PAD | SIZE | SPINDLE THREAD | AIR CONS | | AIR CONS AT L | UMPTION OAD | HEI | GHT | LEN | GTH | NET W | /EIGHT | SOUND PRESSURE | SOUND POWER | AIR INLET |
|---------|-------------|---------------|-----|------|-------------------|----------|-----|------------------|----------------|-----|-----|-------|-----|-------|--------|-------------------|----------------|--------------|
| | | rpm | in. | mm | in. | cfm | I/s | cfm | l/s | in. | mm | in. | mm | lb | kg | ISO 1574 | 4 - dB(A) | in. |
| CP9778 | 6151939778 | 14,000 | 5 | 125 | 7/16-20 UNF | 21 | 9.9 | 25 | 12 | 4.7 | 120 | 11.69 | 297 | 2.2 | 1 | 90 | 101 | 1/4 |
| CP7265S | 8941008650 | 5,000 | 7 | 180 | - | - | - | 32 | 15 | 7.8 | 200 | 11.81 | 300 | 4.85 | 2.2 | 80 | 91 | 1/4 |
| CP7269S | 8941078690 | 5,000 | 7 | 180 | 5/8-16 UNF | 26 | 12 | 26 | 12 | 4.3 | 110 | 12.4 | 315 | 5.07 | 2.3 | 87 | 95.8 | 1/4 |
| CP7269P | 8941078691 | 2,600 | 8 | 205 | 5/8-16 UNF | 26 | 12 | 25 | 11 | 4.3 | 110 | 12.4 | 315 | 5.51 | 2.5 | 87 | 98 | 1/4 |





CP7200

SMART SANDING REPAIR

FEATURES AND BENEFITS

- Mini pistol random orbital sander with
- 2" (50 mm) and 3" (75 mm) H&L pads
 Rubber molded pistol grip to maximize operator control and create less fatigue
- Adjustable power regulator and progressive throttle for easier job
- Excellent for small area repair





CP7201

SMART POLISHING REPAIR

FEATURES AND BENEFITS

- Mini pistol polisher with 3" (75 mm) H&L pads
- Rubber molded pistol grip to maximize operator control and create less fatigue
- Adjustable power regulator and progressive throttle for easier job
- Excellent for small area repair





CP7202

COMPACT FOR YOUR HARD TO REACH AREAS

FEATURES AND BENEFITS

- Mini pistol disc sander with 3" (75 mm) with Roloc pad
- Rubber molded pistol grip and 2-fingered throttle to maximize operator control and to improve ergonomics
- Excellent for small area repair due to its short length and lightweight
- Adjustable power regulator for more précise job

CP7200S kit

See details on 85



CP7201P kit

See details on page 85



CP7202D kit

See details on page 85



See accessories page 85

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

| MODEL | PART NUMBER | FREE SPEED | PAD | SIZE | SPINDLE THREAD | | SUMPTION SPEED | | SUMPTION .OAD | HEI | GHT | LEN | GTH | NET W | /EIGHT | SOUND PRESSURE | SOUND POWER | AIR INLET |
|--------|-------------|---------------|---------|-------|-------------------|-----|-------------------|-----|------------------|-----|-----|------|-----|-------|--------|-------------------|----------------|--------------|
| | | rpm | in. | mm | in. | cfm | l/s | cfm | I/s | in. | mm | in. | mm | lb | kg | ISO 1574 | 14 - dB(A) | in. |
| CP7200 | 8941072001 | 15,000 | 2 and 3 | 50,75 | 1/4-20 UNC | 21 | 9.9 | 21 | 9.9 | 5.7 | 145 | 4.61 | 117 | 1.5 | 0.68 | 86.2 | 97.2 | 1/4 |
| CP7201 | 8941072014 | 2,500 | 3 | 75 | 1/4-20 UNC | - | - | 18 | 8.5 | 5.7 | 145 | 4.8 | 124 | 2.2 | 1 | 88 | 99 | 1/4 |
| CP7202 | 8941072021 | 15,000 | 3 | 75 | 1/4-20 UNC | 21 | 9.9 | 21 | 9.9 | 5.7 | 145 | 4 | 102 | 1.5 | 0.68 | 84.8 | 95.8 | 1/4 |

Sanders

<0.51 hp (380 W) Belt Sanders / Inline Sanders











FLEXIBLE & EASY HANDLING

FEATURES AND BENEFITS

- Rubber molded grip, handle exhaust and swivel air inlet for better operator comfort
- Quick change belt replacement for easier maintenance
- Adjustable sanding arm







CP7268

IN-LINE SANDING

FEATURES AND BENEFITS

- Heavy-duty dual piston straight line air sander for fast material removal, body smoothing, and for large surfaces
- Easy comfort trigger and handle
- 1" (25mm) stroke



000770



CP9780

Same features than CP9779 with belt sander @ 20 x 520 mm (3/4" x 20.4")

See accessories page 85

| MODEL | PART NUMBER | FREE SPEED | POW | 'ER | BELT CA | APACITY | | CONS. EE SPEED | | CONS. OAD | NET W | EIGHT | LEN | GTH | VIBRA LEV ISO 2892 | /EL | | SOUND POWER | |
|--------|-------------|---------------|--------------|-----|------------|-------------|-----|-------------------|-----|--------------|-------|-----------------|----------|------|--------------------------|-----|----------|----------------|-----|
| | | rpm | hp | W | in. | mm | cfm | I/s | cfm | l/s | lb | kg | in. | mm | а | k | ISO 1574 | 44 - dB(A) | in. |
| CP9779 | 6151939779 | 22,000 | 0.35 | 260 | 3/8x13 | 10x330 | 13 | 6.3 | 59 | 28 | 1.98 | 0.9 | 11.97 | 304 | <2.5 | NA | 90.5 | 101.5 | 1/4 |
| CP9780 | 6151939780 | 20,000 | 0.51 | 380 | 3/4x20-1/2 | 20x520 | 14 | 6.9 | 63 | 30 | 3.31 | 1.5 | 14.96 | 380 | <2.5 | NA | 90.5 | 101.5 | 1/4 |
| | | | | | | | | | | | | | | | | | | | |
| MODEL | PART | NUMBER | FREE SPEE | | RIP P | AD CAPACITY | | AIR CONS. |) | AIR CC | | NE ⁻ | T WEIGHT | - VI | BRATION ISO 28927 | | | SOUND | |

6.6

10

2.75x17.5 70x445

8941072680

Sanders accessories



TUNE-UP KITS & MAINTENANCE KITS

| TOOL'S MODEL | TUNE UP KIT | MAINTENANCE KIT |
|------------------------------------|-------------|-----------------|
| CP7215/CP7225/CP7255 series | 8940163459 | 8940163460 |
| CP7215/CP7225/CP7255H series | 8940165875 | 8940163460 |
| CP7225-3/CP7255-3 | 8940163459 | 8940163460 |
| CP7263/CP7264/CP7266/CP7267 series | 8940169233 | 8940163460 |
| CP7265S | 2050530943 | |
| CP9778 | 2050506663 | |
| CP9779 | 2050503853 | |
| CP9780 | 2050503863 | |
| CP3510/CP3511/CP3512/CP3514 | 8940163459 | 8940163460 |
| CP7269S | 8940167963 | |
| CP7200 series | 8940172128 | |








SANDING PADS

| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|--------------------------------------|---------------------------------------|-------------------------|
| CP3510 | Ø 5" (125mm) Pad H&L | 8940166666 |
| CP3511 | Ø 5" (125mm) Pad PSA | 8940166665 |
| CP3512/CP3514 | Ø 5" (125mm) Pad H&L with 5 holes | 8940166668 |
| CP7200S | Ø 2" (50mm) Pad H&L w/o holes | 8940158334 |
| CP7200S | Ø 3" (75mm) Pad H&L w/o holes | 8940158330 |
| CP7225/CP7255/CP7215 (H) | Ø 6" (150mm) Pad PSA w/o holes | 8940163455 |
| CP7225/CP7255/CP7215 (H) | Ø 6" (150mm) Pad H&L w/o holes | 8940163456 |
| CP7225/CP7255/CP7215 (CV/SV/CVE/SVE) | Ø 6" (150mm) Pad PSA with 6 holes | 8940163457 |
| CP7225/CP7255/CP7215 (CV/SV/CVE/SVE) | Ø 6" (150mm) Pad H&L with 6 holes | 8940163458 |
| CP7225-3/CP7255-3 | Ø 3" (75mm) Pad PSA w/o holes | 8940167203 |
| CP7265S/CP7269S | Ø 6,75" (170mm) Flexible edge pad&nut | KF129587 |
| CP870 | Ø 6" (150mm) Pad PSA | CA145098 |
| CP7263E | 74X109mm NV H&L Pad Set | 8940168997 |
| CP7263CVE | 74X109mm CV H&L Pad Set | 8940168998 |
| CP7264CVE | 70X198mm CV H&L Pad Set | 8940169002 |
| CP7266CVE | 80X130mm CV H&L Pad Set | 8940169000 |
| CP7267CVE | 100X144mm CV H&L Pad Set | 8940169001 |

CP7200S Kit

Part No. 8941172001



- (1) Mini random orbital sander CP7200
- (2) 2" 50 mm and 3" 75 mm backing pads
- (10) 2" 50 mm 320 400 & 600 grit sand paper and spindle key
- (1) Carrying case

CP7201P Kit

Part No. 8941172014 Kit includes:



- (1) Mini Polisher CP7200
- (1) 3" 75 mm backing pad
- (2) 3.5" 90 mm foam compounding pads (white & yellow)
- (1) 3.5" 90 mm wool buffing pad
- (1) Carrying case

CP7202D Kit

Part No. 8941172021





- (1) Mini disc sander CP7202
- (1) 3" 75 mm and backing pads
- (10) 3" 75 mm 80, 100 and 120 grit sanding discs
- (1) 3" 75 mm fine, medium and coarse surface preparation discs and spindle wrench
- (1) Carrying case



SANDING PAPER FOR CP7200S

| ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|----------------------------------|-------------------------|
| Ø 2" (50mm) 320 Grit (50pc) -H&L | 8940158677 |
| Ø 2" (50mm) 400 Grit (50pc) -H&L | 8940158678 |
| Ø 2" (50mm) 600 Grit (50pc) -H&L | 8940158679 |
| Ø 3" (75mm) 400 Grit (50pc) -H&L | 8940158681 |
| , , , , , | |

ROL-LOC SURFACE PREPARATION PAD FOR CP7202D

(must be used with the rol-loc back-up pad)



| ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|---|-------------------------|
| Ø 3" (75mm) Sanding disc 60 Grit (5pc) | 8940161712 |
| Ø 3" (75mm) Sanding disc 80 Grit (5pc) | 8940161713 |
| Ø 3" (75mm) Sanding disc 100 Grit (5pc) | 8940161714 |
| Ø 3" (75mm) Sanding disc 120 Grit (5pc) | 8940161715 |
| Ø 3" (75mm) Surface Prep Pad (fine) (5pc) | 8940161716 |
| Ø 3" (75mm) Surface Prep Pad (medium) (5pc) | 8940161717 |
| Ø 3" (75mm) Surface Prep Pad (course) (5pc) | 8940161718 |

Sanders accessories

SANDING BELTS - SET OF 10 BELTS



| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|--------------|---------------------------------------|----------------------------|
| CP9779 | Belts 60 Grit, 3/8"x13" (10x330mm) | 8940169003 |
| CP9779 | Belts 80 Grit, 3/8"x13" (10x330mm) | 8940169004 |
| CP9779 | Belts 100 Grit, 3/8"x13" (10x330mm) | 8940169005 |
| CP9779 | Belts 120 Grit, 3/8"x13" (10x330mm) | 8940169006 |
| CP9780 | Belts 60 Grit, 3/4"x20,4" (20x520mm) | 8940169007 |
| CP9780 | Belts 80 Grit, 3/4"x20,4" (20x520mm) | 8940169008 |
| CP9780 | Belts 100 Grit, 3/4"x20,4" (20x520mm) | 8940169009 |
| CP9780 | Belts 120 Grit, 3/4"x20,4" (20x520mm) | 8940169010 |

POLISHING PADS





| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|---------------|-----------------------------------|----------------------------|
| CP7201 | Ø 3,5" (90mm) Wool pad H&L | CA158110 |
| CP7201 | Ø 2" (50mm) Wool pad H&L | 8940158774 |
| CP7201 | Ø 3,5" (90mm) Sponge soft pad H&L | CA158108 |
| CP7201 | Ø 3,5" (90mm) Sponge hard pad H&L | CA158109 |
| CP7201 | Ø 2" (50mm) Sponge soft pad H&L | 8940158772 |
| CP7201 | Ø 2" (50mm) Sponge hard pad H&L | 8940158773 |
| CP7265/CP7269 | Ø 8" (200mm) Wool pad | KF125423 |

DUST EXTRACTION KIT FOR SELF GENERATE VACUUM



| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER |
|--|--|----------------------------|
| CP3512/CP3513, CP7225/CP7255/CP7215SV(E) | Dust extraction kit (incl. 1 dust bag and 1,8m (6") dust hose) | 2050522453 |
| CP3512/CP3513, CP7225/CP7255/ CP7215SV(E) | Dust bag set (incl. 5 dust bags) | 2050523203 |

VACUUM HOSE ADAPTOR FOR CENTRAL VACUUM SANDERS



| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | ACCESSORY'S PART NUMBER | | |
|---|--|----------------------------|--|--|
| CP3514/CP3515, CP7215/CP7225/ CP7255CV(E), CP7215/CP7225/CP- | Vacuum hose adaptor Ø 1" (25mm)/Ø 1-1/4" (32mm) | 6153501170 | | |
| 7255CVE-3, CP7215/CP7255HCVE, CP7263/CP7264/CP7266/CP7267CVE | Vacuum hose adaptor Ø 1" (25mm)/Ø 1-1/8" (28mm) | 6158044480 | | |

BACKING PAD FOR CP9778



| TOOL'S MODEL | ACCESSORY'S DESCRIPTION |
|--------------------|----------------------------|
| BACKING PAD 5-1/2" | 2050485083 |
| BACKING PAD 4-1/2" | 2050485073 |
| PLATE-BACKING 3.75 | KF137215 |

PERCUSSIVE TOOLS









INLINE NEEDLE SCALER / CHIPPING HAMMER

Quick change 2 in 1 needle scaler and chipping hammer for less down time

PISTOL CHIPPING HAMMERS

Pistol chipping hammers include selection of unique vibration damping body styles to improve operator comfort and minimize fatigue.

SHANKS

- 401" (10.2 mm) round shank
- 401" (10.2 mm) hexagonal shank
- 1/2" (12.7 mm) square shank
- 498" round shank (see CP717-Classic part)

Percussive Tools

Hammer

























CP7110

HEAVY-DUTY HAMMER

FEATURES AND BENEFITS

- · Heavy-duty pistol grip hammer
- Internal muffler minimizes exhaust sound maximizing operator's comfort
- Great control thanks to the teasing trigger for slow start-up

CP7111

PISTOL GRIP HAMMER

FEATURES AND BENEFITS

- Versatile and cost effective
- Fast cutting action


CP7150


PISTOL GRIP HAMMER

FEATURES AND BENEFITS

- Versatile and cost effective
- Fast cutting action











CP7110 Kit See details on page 91



CP7111HK & CP7111K

Same features as CP7111 and CP7111H plus accessories and details on page 91



CP7150K

See details on page 91



| MODEL | PART NUMBER | ВО | RE | STR | OKE | ; | SHANK | | SHANK | | SHANK | | SHANK | | BLOWS PER MINUTE | | AIR CONS. @LOAD | | WEIGHT | | LENGTH | | | SOUND SOUND PRESS. POWER | | |
|---------|-------------|------|----|------|-----|-------|-------|------|-------|-----|-------|------|-------|------|---------------------|------|--------------------|----------|-----------|-----|--------|--|--|-----------------------------|--|--|
| | | in. | mm | in. | mm | shape | in. | mm | | in. | mm | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. | | | | | | |
| CP7110 | 8941071101 | 0.75 | 19 | 2.64 | 67 | Round | 0.401 | 10.2 | 3200 | 14 | 6.9 | 3.75 | 1.7 | 9.06 | 230 | 6 | 2.9 | 98 | 109 | 1/4 | | | | | | |
| CP7111 | 8941071110 | 0.75 | 19 | 2.64 | 67 | Round | 0.401 | 10.2 | 3000 | 25 | 11 | 3.53 | 1.6 | 6.73 | 171 | 13.3 | 5 | 99 | 110 | 1/4 | | | | | | |
| CP7111H | 8941071111 | 0.75 | 19 | 2.64 | 67 | Hex | 0.401 | 10.2 | 3000 | 25 | 11 | 3.53 | 1.6 | 6.73 | 171 | 13.3 | 5 | 99 | 110 | 1/4 | | | | | | |
| CP7150 | 8941071500 | 0.75 | 19 | 3.5 | 89 | Round | 0.401 | 10.2 | 2300 | 25 | 11 | 4.85 | 2.2 | 8.86 | 225 | 15.6 | 7.3 | 99 | 110 | 1/4 | | | | | | |





















CP7165

LOW VIBRATION HAMMER

FEATURES AND BENEFITS

- Low vibrations thanks to an air cushion present in the tool reducing vibrations to 4.37 m/s²
- Rubber grip at the back of the tool & Well balanced tool for comfortable everyday use.
- Aluminum motor housing for high robutness
 Quick change chisel retainer (provided with the tool)









| MODEL | PART NUMBER | ВС | RE | STR | OKE | | SHANK | | SHANK | | SHANK | | SHANK | | BLOWS AIR CONS. PER MINUTE @LOAD | | WEIGHT | | LENGTH | | VIBRATION LEVEL ISO 28927 (M/S2) | | SOUND SOUND PRESS. POWER II | | |
|--------|-------------|------|----|------|-----|-------|-------|------|-------|-----|-------|------|-------|------|----------------------------------|-----|--------|----------|-----------|-----|--|--|--------------------------------|--|--|
| | | in. | mm | in. | mm | shape | in. | mm | | in. | mm | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. | | | | | |
| CP7160 | 8941071600 | 0.75 | 19 | 2.64 | 67 | Round | 0.401 | 10.2 | 3500 | 18 | 8.7 | 4.14 | 1.88 | 7.52 | 191 | 4.4 | 1.4 | 98.4 | 109.4 | 1/4 | | | | | |
| CP7165 | 8941071650 | 0.75 | 19 | 3.5 | 89 | Round | 0.401 | 10.2 | 2500 | 17 | 8.2 | 4.83 | 2.19 | 9.45 | 240 | 3.3 | 1.1 | 102.5 | 113.5 | 1/4 | | | | | |

Percussive Tools

Needle scalers

Needle capacity: 12x1/8 (3)









CP7115

COMPACT TO REACH SMALL AREAS

FEATURES AND BENEFITS

- Delivered with a set of needles 12 x 1/8" (3 mm)
- Great to reach surfaces in confined spaces
- Great for rust removal on chassis, wheel drums cleaning or surface clean-up

Needle capacity: 19x1/8 (3)









CP7120

CONVERTIBLE NEEDLES SCALER/CHISEL HAMMER

FEATURES AND BENEFITS

- Easily converts into a chipping hammer
- Durable and economical solution
- Quick change chisel retainer
- Adjustable sleeve, 19 x 1/8" (3 mm) steel needles and 1.37" (35 mm) width chisel with high resistance to wear

Needle capacity: 19x1/8 (3)









CP7125

HIGH DURABILITY AND ROBUST FOR GENERAL MAINTENANCE OPERATIONS

FEATURES AND BENEFITS

- Rubber sleeve on pistol handle for better comfort & maneuverability
- 4000 blows per minute for high efficiency on cleaning up operations
- Delivered with 2 sets of needles: 19 x 1/8" (3 mm) for standard usage and 29 x 5/64" (2 mm) for finer usage

| MODEL | PART NUMBER | ВО | RE | STR | OKE | NEEDLE CAPACITY | BLOWS PER MINUTE | AIR (| ONS. OAD | WEI | GHT | LEN | GTH | VIBRA LEV ISO 2892 | /EL | | SOUND POWER | |
|--------|-------------|-------|------|------|-----|--------------------|---------------------|-------|-------------|------|-----|-------|-----|--------------------------|-----|----------|----------------|-----|
| | | shape | in. | in. | mm | Qty (Ø) | | cfm | I/s | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP7115 | 8941071150 | 14 | 0.55 | 1.26 | 14 | 12x1/8 (3) | 4000 | 4.2 | 2 | 2.87 | 1.3 | 11.42 | 290 | 11.4 | 1.6 | 99 | 110 | 1/4 |
| CP7120 | 8941071200 | 25 | 0.98 | 1.12 | 25 | 19x1/8 (3) | 4800 | 15 | 7.4 | 6.17 | 2.8 | 17.99 | 457 | 11.4 | 3.4 | 99 | 110 | 1/4 |
| CP7125 | 8941071250 | 21 | 0.83 | 1.32 | 21 | 19x1/8 (3) | 4000 | 4.7 | 2.2 | 6.17 | 2.8 | 12.8 | 325 | 19.2 | 2.4 | 105 | 116 | 1/4 |

Percussive Tools

Percussive Tools accessories



CP7110 Kit

Part No. 8941171101

Kit includes:

- CP7110 Hammer
- (1) Flat chisel A046073
- (1) Tapened Puch A046078
- (1) Spot weld splitter A046075
- (1) Single blade panel cutter
- (1) Edging chisel
- (1) Quick change retainer 2050487413
- (1) Oiler 2050524123



CP7111K

Part No. 8941171110

Kit includes:

- CP7111 Hammer
- A046073 Flat Chisel
- A046078 Tapered Punch
- A046075 Spot Weld Splitter
- A040073 Opot Weld Oplitte
- Single Blade Panel Cutter
- A046076 Edging Chisel
- 2050487413 Quick Change Retainer
- 2050524123 Oiler



CP7111HK

Part No. 8941171111

Kit includes:

- CP7111H Hammer
- CA155786 Flat Chisel
- CA157107 Tapered Punch
- CA155792 Spot Weld Splitter
- Single Blade Panel Cutter
- Edging Chisel



CP7150K

Part No. 8941171500

Kit includes:

- CP7150 Hammer
- (1) Falt chisel A046073
- (1) Tapened Puch A046078
- (1) Spot weld splitter A046075
- (1) Single blade panel cutter
- (1) Edging chisel
- (1) Quick change retainer 205047413
- (1) Oiler 2050524123



CP7160K

Part No. 8941071601

Kit includes:

- CP7160 Hammer
- (5) Chiesel set 8940175745
- (1) Oiler 2050524123
- (1) CP medium soft bag 8940175127



CP7165K

Part No. 8941071651

Kit includes:

- CP7165 Hammer
- (5) Chiesel set 8940175745
- (1) Oiler 2050524123
- (1) CP medium soft bag 8940175127


Percussive Tools accessories



TUNE-UP KITS & MAINTENANCE KITS


| TOOL'S MODEL | SPARE KIT'S PART NUMBER |
|-----------------------------|-------------------------|
| CP7110 | 2050505083 |
| CP7111/CP7111H/CP7150 | 2050506823 |
| CP7115 | 8940169996 |
| CP7120 | 2050506933 |
| CP7125 | 8940169838 |
| CP9778 | 2050506663 |
| CP9779 | 2050503853 |
| CP9780 | 2050503863 |
| CP3510/CP3511/CP3512/CP3514 | 8940163459 |
| CP7269S | 8940167963 |
| CP7200 series | 8940172128 |

CHISEL TOOL RETAINERS FOR CP7110/CP7111 & CP7150



| TOOL'S MODEL | SPARE KIT'S PART NUMBER | ACCESSORY'S DESCRIPTION |
|--------------|-------------------------|--|
| 1 | 8951011958 | Quick Change Chisel Spring Retainer |
| 1 | A046095 | Heavy Duty Quick Change Retainer |
| 2 | A046096 | Retainer Bee hive |
| 3 | 2050525333 | Zip Change Retainer |
| 3 | A046094 | Heavy Duty Zip Change Retainer made in USA |
| 4 | 8940158924 | Posi Lock Quick Change Retainer |

NEEDLES



| TOOL'S MODEL | ACCESSORY'S TYPE | DIAN | SSORY'S METER | ACCES: LEN | GTH | QUANTITY IN PACKAGE | ACCESSORY'S PART NUMBER | ACCESSORY'S DESCRIPTION |
|-------------------|----------------------|--------------|------------------|---------------|-----------|---------------------------|----------------------------|--|
| CP7115/ | 1 | in. 5/64" | 2 | in. 7 | mm 178 | 100 | 6153998160 | NEEDLE |
| CP7125 CP7115 | 1 | 1/8" | 3 | 5 | 127 | 12 | 8951011498 | FLAT 2MM x 178 (SET 100) NEEDLE 3MM x 120 5615 ST (SET 12) |
| CP7120/ CP7125 | 1 | 1/8" | 3 | 5 | 127 | 19 | P136403 | NEEDLE FLAT 3MM x 127 STEEL (SET 19) |
| CP7115 | 1 | 1/8" | 3 | 7 | 178 | 12 | NP123901 | NEEDLE FLAT 3MM x 178 STEEL (SET 12) |
| | 1 | 1/8" | 3 | 7 | 178 | 19 | 8940159860 | NEEDLE FLAT 3MM x 178 (SET 19) |
| | 1 (High grade steel) | 1/8" | 3 | 7 | 178 | 19 | P100146 | NEEDLE FLAT 3MM x 178 STEEL (SET 19) |
| | 1 (Stainless steel) | 1/8" | 3 | 7 | 178 | 19 | P106454 | NEEDLE FLAT 3MM X 178 STAINLESS STEEL |
| CP7120/ | 1 | 1/8" | 3 | 7 | 178 | 100 | 6153998170 | NEEDLE FLAT 3MM x 178 (SET 100) |
| CP7120/ CP7125 | 1 (Anti-sparkling) | 1/8" | 3 | 7 | 178 | 100 | 8940171565 | NEEDLE FLAT 3MM x 178 SPARKLES (SET 100) |
| | 1 | 1/8" | 3 | 7 | 178 | 250 | NP137638 | NEEDLE FLAT 3MM x 178 STEEL (SET 250) |
| | 2 | 1/8" | 3 | 7 | 178 | 100 | 6153998190 | NEEDLE CHISEL 3MM x 178 (SET 100) |
| 1 | 3 | 1/8" | 3 | 7 | 178 | 100 | 6153998210 | NEEDLE POINTED 3MM x 178 (SET 100) |

- 1 Flat type: Light treatment and polishing effect
- 2 Chisel Type : Light surface marking
- 3 Pointed type : Very hard scale

Anti spark needles. Cold Spark for use in potentially explosive areas

Stainless Steel needles. For use in applications where corrosion or humidity presents a problem such as food processing industry

Percussive lools

Percussive Tools accessories

CHISELS

TYPE OF SHANK

| Round .401" A | Hex .401" B | Round .498" C |
|---------------|-------------|---------------|
| 0.401" | 0.401" | 1/2" |

CP7111/CP7110/CP7150 CP7111H

| DD AWING | ACCESSORY'S | ACCESSOF | RY'S LENGTH | ACCESSOR | RY'S WIDTH | A | CCESSORY'S SHA | NK |
|----------|----------------------------|----------|-------------|----------|------------|---------|----------------|------------|
| DRAWING | ACCESSORY'S DESCRIPTION | in. | mm | in. | mm | А | В | С |
| | | 4 | 102 | 5/8" | 16 | | | WP123997 |
| | | 7 | 180 | 1/2" | 12,7 | A008542 | | |
| | Flat chisel | 7 | 180 | 3/4" | 19 | A046073 | CA155786 | 2050512803 |
| | _ | 7,5 | 191 | 5/8" | 16 | | | WP123996 |
| | | 18 | 457 | 3/4" | 19 | A046080 | | |
| | Undercoat Goo Scraper | 6-1/2" | 165 | 1" | 25 | A046072 | | |
| | Spot Welding Splitter | 7" | 180 | 1" | 25 | A046075 | | |
| | Nut Splitter | 10" | 254 | 3/4" | 19 | A046044 | | |
| | Rivet Cutter | 6-1/2" | 165 | 5/8" | 16 | A046050 | | |
| | Anala Caslina | 6-1/2" | 165 | 1-3/8" | 35 | | | WP123999 |
| | Angle Scaling - | 7" | 180 | 1-1/4" | 32 | A046063 | CA155780 | |
| | Scrapper | 6" | 152 | 1-3/4" | 44 | A133907 | | |
| | D | 7" | 180 | 5/16" | 7,6 | A046064 | CA155782 | |
| | Diamond Point – | 7-1/2" | 191 | 1/4" | 6 | | | WP123995 |
| | Edging Chisel | 5-3/8" | 137 | 5/8" | 16 | A046076 | | |

CP7120

Percussive Tools accessories

CHISELS

TYPE OF SHANK

| Round .401" A | Hex .401" B | С |
|----------------------|-------------|--------|
| 0.401" | 0.401" | 1/2" |
| CP7111/CP7110/CP7150 | CP7111H | CP7120 |

| DRAWING | ACCESSORY'S DESCRIPTION | ACCESSOR' | | ACCESSOR | | | CESSORY'S SHA | |
|---------|----------------------------|-----------|-----|----------|------|---------|---------------|------------|
| | | in. | mm | in. | mm | А | В | С |
| | Muffler Cutter | 7-1/2" | 191 | | | A046077 | | |
| | Blank Chisel | 7" | 180 | 1/2" | 12,7 | | | WP123994 |
| | DIAIN OIISEI | 7" | 180 | 1/2" | 13 | A046074 | CA155790 | |
| | Tapered Punch | 7" | 180 | 1/8" | 2,5 | A046078 | | |
| | Tie rod (Universal Joint) | 4-1/4" | 108 | 5/8" | 16 | A046057 | | |
| | Smoothing Hammer | 3" | 76 | 1-3/4" | 44 | A046091 | | |
| | Wide Scaling | 7" | 180 | 1-3/8" | 35 | | | WP123998 |
| | wide scaling | 7" | 180 | 1-15/16" | 50 | | | 8940162308 |
| | Pointed chisel | 7" | 180 | | | | | 2050512793 |

DRILLS



PISTOL GRIP DRILLS

- Ideal for all maintenance drilling tasks
- Drilling hole capacity up to 1/2" (13 mm) dia. (in steel)
- Best ergonomic handle
- Extra-support side handle recommended for better handling of drills with larger drilling capacity and higher torque

Air drill designs for drilling holes in wood, metal, plastic... CP offers a wide range of drills, from 1/4" (6 mm) to 1/2" (13 mm) chucks, from 500 to 4,200 rpm. To achieve the best drilling quality, the following table will assist you in selecting the most suitable drill: size of holes, type of material, power needed...





ANGLE DRILLS

- Ideal for restricted access application
- Drilling hole capacity to 3/8" (10 mm) dia. (in steel)

STRAIGHT DRILLS

- Mainly smaller diameter drilling less than 3/8" (10 mm) dia. (in steel)
- Favored for vertical drilling

DRILLSRANGE

| MODEL | FREE SPEED | CHUCK C | CAPACITY | POWER | | |
|-------------------|---------------|---------|----------|-------|------|--|
| | rpm | in. | mm | hp | kW | |
| PISTOL GRIP | | | | | | |
| CP7300C | 2,700 | 1/4 | 6 | 0,27 | 0.20 | |
| CP7300RC | 2,700 | 1/4 | 6 | 0.27 | 0.20 | |
| CP7300RQCC | 2,800 | 1/4 | 6 | 0.23 | 0.30 | |
| CP9285C / CP9287C | 2,900 | 3/8 | 10 | 0.50 | 0.38 | |
| CP9790C / CP9792C | 2,000 | 3/8 | 10 | 0.37 | 0.27 | |
| CP9286C / CP9288C | 600 | 1/2 | 13 | 0.50 | 0.38 | |
| CP9789C / CP9791C | 800 | 1/2 | 13 | 0.37 | 0.27 | |
| STRAIGHT GRIP | | | | | | |
| CP887C | 2,700 | 3/8 | 10 | 0.27 | 0.20 | |
| ANGLE DRILL | | | | | | |
| CP879C | 1,800 | 3/8 | 10 | 0.27 | 0.20 | |

Drills







CP7300 SERIES

HIGH COMFORT & LIGHTWEIGHT

For operators working in body shops or general maintenance applications such as drilling, honing, reaming and hole sawing who look for high comfort & lightweight drills, CP7300 / CP928X / CP978X / CP979X Series is the composite drills that you need.





FEATURES AND BENEFITS

- Composite housing with thermoplastic rubber handle grip and wings on right & left sides for better operator comfort
- Large teasing trigger and progressive valve allowing more control to start holes
- Handle exhaust allowing the air to flow away from the operator
- Flat back part for better pushing action while drilling and tapping

| MODEL | PART NUMBER | FREE SPEED | POWER | | CHUCK CAPACITY | | STALL TORQUE | | NET WEIGHT | | LENGTH | | AIR CONS. @LOAD | | VIBRATION LEVEL ISO 28927 (M/S2) | | SOUND SOUND PRESS. POWER | | |
|------------|-------------|---------------|-------|-----|----------------|-----|--------------|-----|------------|------|--------|-----|--------------------|-----|-------------------------------------|---|--------------------------|------------|-----|
| | | rpm | hp | W | in. | mm | ft.lbf | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP7300C | 8941073013 | 3,300 | 0.31 | 230 | 1/4 | 6.4 | 1.9 | 2.6 | 1.41 | 0.64 | 6.69 | 170 | - | - | <2,5 | - | 85 | 96 | 1/4 |
| CP7300RC | 8941073011 | 2,800 | 0.31 | 230 | 1/4 | 6.4 | 1.9 | 2.6 | 1.48 | 0.67 | 7.32 | 186 | - | - | <2,5 | - | 82 | 93 | 1/4 |
| CP7300RQCC | 8941073012 | 2,800 | 0.31 | 230 | 1/4 | 6.4 | 1.9 | 2.6 | 1.52 | 0.69 | 7.48 | 190 | - | - | <2,5 | - | 82 | 93 | 1/4 |

3/8" Drills

2,000 RPM











HIGH COMFORT & HANDLING

FEATURES AND BENEFITS

- Composite housing with thermoplastic rubber handle grip for high comfort &
- Compact low profile head to get into confined spaces (high quality industrial Jacobs® chucks for longer use)
- Lock-off throttle for more controlled applications
- Built-in Forward Reverse ring for easier operations
- Handle exhaust allowing the air to flow away from the operator

3,000 RPM











2,100 RPM









CP9790C

HIGH COMFORT & LIGHTWEIGHT

FEATURES AND BENEFITS

- Composite housing with thermoplastic rubber handle grip and wings on right & left sides for better operator comfort
- Large teasing trigger and progressive valve allowing more control to start holes
- Handle exhaust allowing the air to flow away from the operator
- Flat back part for better pushing action while drilling and tapping

CP9287C

Same features as CP9285C with keyless chuck

CP9792C

Same features as CP9790C with keyless chuck

| MODEL | PART NUMBER | FREE SPEED | POV | WER | CHUCK | CAPACITY | STALL 1 | TORQUE | NET W | /EIGHT | LEN | GTH | AIR C | | | ON LEVE 27 (M/S2) | _ | SOUND POWER | AIR INLET |
|---------|-------------|---------------|------|-----|-------|----------|---------|--------|-------|--------|------|-----|-------|-----|------|----------------------|----------|----------------|--------------|
| | | rpm | hp | W | in. | mm | ft.lbf | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP879C | 8941008790 | 2,000 | 0.35 | 260 | 3/8 | 10 | 3.2 | 4.4 | 2.65 | 1.2 | 8.58 | 218 | - | - | <2.5 | - | 80.6 | 91.6 | 1/4 |
| CP9285C | 8941092850 | 3,000 | 0.62 | 460 | 3/8 | 10 | 4.1 | 5.5 | 2.4 | 1.09 | 8.23 | 209 | 21 | 10 | <2,5 | - | 83.7 | 94.7 | 1/4 |
| CP9287C | 8941092870 | 3,000 | 0.62 | 460 | 3/8 | 10 | 4.1 | 5.5 | 2.38 | 1.08 | 8.23 | 209 | 21 | 10 | <2,5 | - | 83.7 | 94.7 | 1/4 |
| CP9790C | 8941097900 | 2,100 | 0.48 | 360 | 3/8 | 10 | 4.1 | 5.5 | 2.43 | 1.1 | 9.25 | 235 | - | - | <2.5 | - | 87.1 | 98.5 | 1/4 |
| CP9792C | 8941097920 | 2,100 | 0.48 | 360 | 3/8 | 10 | 4.1 | 5.5 | 2.43 | 1.1 | 9.25 | 235 | - | - | <2,5 | - | 87.1 | 98.5 | 1/4 |



3/8" & 1/2" Drills

2,100 RPM









CP887C

HIGH COMFORT & HANDLING

FEATURES AND BENEFITS

- Composite housing with thermoplastic rubber handle grip for high comfort & handling
- Compact low profile head to get into confined spaces (high quality industrial Jacobs® chucks for longer use)
- Lock-off throttle for more controlled applications
- Built-in Forward Reverse ring for easier operations
- Handle exhaust allowing the air to flow away from the operator

600 RPM











840 RPM









CP9789C

HIGH COMFORT & LIGHTWEIGHT

FEATURES AND BENEFITS

- Composite housing with thermoplastic rubber handle grip and wings on right & left sides for better operator comfort
- Large teasing trigger and progressive valve allowing more control to start holes
- Handle exhaust allowing the air to flow away from the operator
- Flat back part for better pushing action while drilling and tapping

CP9288C

Same features as CP9286C with keyless chuck

CP9791C

Same features as CP9286C with keyless chuck







| MODEL | PART NUMBER | FREE SPEED | POV | WER | CHUCK | CAPACITY | STALL T | ORQUE | NET W | /EIGHT | LEN | GTH | AIR C | | VIBRATIC ISO 2892 | | SOUND PRESS. | SOUND POWER | AIR INLET |
|---------|-------------|---------------|------|-----|-------|----------|---------|-------|-------|--------|-------|-----|-------|-----|----------------------|---|--------------|----------------|--------------|
| | | rpm | hp | W | in. | mm | ft.lbf | Nm | lb | kg | in. | mm | cfm | l/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP887C | 8941008870 | 2,100 | 0.4 | 300 | 3/8 | 10 | 3.8 | 5.1 | 2.43 | 1.1 | 9.25 | 235 | - | - | <2,5 | - | 82.7 | 93.7 | 1/4 |
| CP9286C | 8941092860 | 600 | 0.48 | 360 | 1/2 | 13 | 16.2 | 22 | 3.28 | 1.49 | 9.84 | 250 | 23 | 11 | <2,5 | - | 84.2 | 95.2 | 1/4 |
| CP9288C | 8941092880 | 600 | 0.48 | 360 | 1/2 | 13 | 16.2 | 22 | 3.2 | 1.45 | 9.84 | 250 | 23 | 11 | <2,5 | - | 84.2 | 95.2 | 1/4 |
| CP9789C | 8941097890 | 840 | 0.47 | 350 | 1/2 | 13 | 10.3 | 14 | 3.09 | 1.4 | 10.43 | 265 | - | - | <2,5 | - | 88.3 | 99.3 | 1/4 |
| CP9791C | 8941097910 | 840 | 0.47 | 350 | 1/2 | 13 | 10.3 | 14 | 3.09 | 1.4 | 10.43 | 265 | - | - | <2,5 | - | 88.3 | 99.3 | 1/4 |

Accessories Drills



TUNE UP KITS & REPAIR KITS

| TOOL'S MODEL | TUNE UP KIT PART NUMBER |
|-------------------|----------------------------|
| CP9285C & CP9287C | 8940175286 |
| CP9286C | 8940175281 |
| CP9789C | 8940175273 |
| CP9790C & CP9792C | 8940175273 |





DRILL CHUCKS

| TOOL'S MODEL | CAPA | ACITY | THREAD | CHUCK PART NUMBER | TYPE | KEY PART NUMBER |
|---------------------------|------|-------|---------|-------------------|---------------|-----------------|
| | in. | mm | in. | | | |
| CP7300 | 1/4" | 6 | 3/8"-24 | 8951011473 | Chuck +Key | 2050497003 |
| CP9285/CP9790/CP879/CP887 | 3/8" | 10 | 3/8"-24 | C142408 | Chuck +Key | 2050507493 |
| CP9286/CP9789 | 1/2" | 13 | 3/8"-24 | 2050486963 | Chuck +Key | |
| CP7300RQC | 1/4" | 6 | 3/8"-24 | 8940162272 | Keyless chuck | |
| CP9287/CP9792 | 3/8" | 10 | 3/8"-24 | 2050502063 | Keyless chuck | |
| CP9288/CP9791 | 1/2" | 13 | 3/8"-24 | 2050502073 | Keyless chuck | |



SIDE HANDLE

| TOOL'S MODEL | ACCESSORY'S DESCRIPTION | KEY PART NUMBER |
|---------------|----------------------------|-----------------|
| CP9286/CP9288 | | 2050498553 |
| CP9789/CP9791 | Side fixture and handle | 8940174061 |

| Notes | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

SPECIALTY TOOLS



CP OFFERS A WIDE RANGE
OF SPECIALTY TOOLS TO RESPOND
TO YOUR DAILY AIR TOOL NEEDS:



Cutting tools







CP7901

LOW VIBRATION

For operators working in body shops or general maintenance applications who look for comfortable air saw for a periodic usage, CP7901 series is the air saw that you need.





CP7901K

Part No. 8941079010

- (1) CP7901 saw
- (5) each 18T, 24T, 32T blades
- (1) Swivel inlet
- (1) heavy duty protective case



FEATURES AND BENEFITS

- 3/8" (10 mm) stroke length
- Great power and speed of 10,000 strokes per minute
- Low vibrations (less than 2.5 m/s²) offers high operator comfort
- 360° swivel air inlet

| MODEL | PART NUMBER | STROKES PER MINUTES | | OKES IGHT | | ONS. DAD | NET W | /EIGHT | LEN | GTH | | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|------------------------|-----|--------------|------------|-------------|-------|------------|-------------|-----------|-----------|-----------------------|-----------------|------------------|-----------|
| CP7901 | 8941079011 | 10.000 | in. | mm 10 | cfm 5.5 | 1/s 2.6 | 1.9 | kg 0.86 | in. 9.02 | mm 229 | a <2.5 | k - | ISO 157 | 44 - dB(A) 78 | in. |

Tire Buffer & Cutting Tools

22000 RPM















CP873C

REPAIRING: A NEW LIFE FOR YOUR TIRES!

FEATURES AND BENEFITS

- Composite housing for less cold transfer and light weight
- Easy and comfortable to use, reducing constraints for the operator in term of vibrations & sounds
- The buffing wheel is quick and easy to change between different applications
- Reinforced streamline & lock-off safety lever







CP7900

LIGHTWEIGHT

FEATURES AND BENEFITS

- Compact (8.5" 216 mm) of length and lightweight (1.3 lbs 0.59 kg)
 Ergonomic design and robust housing
- handle
- Adjustable guard guide3/8" (10 mm) stroke length
- Includes (1) each 18T, 28T, 32T replacement blades





CP871C kit

Part No. 8940176890

Kit includes:

- (1) Tire Buffer CP873C
- (1) Whip hose and exhaust hose

Part No. 8940176892

Kit includes:

- (1) Low Speed Tire Buffer CP871C
- (1) Whip hose and exhaust hose



See accessories page 110

| MODEL | PART NUMBER | POV | VER | CHUCK/W | HEELSIZE | FREE SPEED | AIR C | | NET \ | VEIGHT | LEN | IGTH | VIBRATIO ISO 2893 | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|------|----------------|---------|--------------|---------------|-------|-----|---------|--------|------|------|----------------------|-----------------------|-----------------|----------------|-----------|
| | | hp | W | in. | mm | rpm | cfm | I/s | lb | kg | in. | mm | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP871C | 8940176889 | 0.47 | 350 | 3/8 | 10 | 22000 | - | - | 1.61 | 0.73 | 7.91 | 201 | <2,5 | - | 88 | 88 | 1/4 in |
| CP873C | 8940176891 | 0.47 | 350 | 7/16 | 11 | 3000 | - | - | 2.25 | 1.02 | 8.66 | 220 | <2,5 | - | 87 | 87 | 1/4 in |
| MODEL | PART NUMBER | | OKES INUTES | | OKES IGHT | | CONS. | | NET WEI | GHT | LENG | ЭТН | | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
| | | | | in. | mm | cfm | I/s | | lb | kg | in. | mm | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP7900 | 8941079000 | 10. | 000 | 3/8 | 10 | 5.5 | 2.6 | 3 | 1.3 | 0.59 | 8.5 | 216 | 64.3 | 19.6 | 93 | 82 | 1/4 |

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Tire Buffers



CP873C-HD

Heavy Duty Tire Buffers - Low Speed

RETREADING: A NEW LIFE FOR **YOUR TIRES!**

Looking for pneumatic tire buffers for tire retread, concerned about the environment: CP873C HD series is what you need.





CP873C-HDES Same features as CP873C-HD with extended neck



FEATURES AND BENEFITS

- Composite material and light weight
- Easy and comfortable to use, reducing constraints for the operator
- The buffing wheel is equipped 7/16" hexagonal quick change slip chuck
- Reinforced streamline & lock-off safety lever
- Heavy duty version : have air swivel inlet for more comfort





CP873C-HDES

| MODEL | PART NUMBER | POV | VER | CHUCK/W | HEELSIZE | FREE SPEED | AIR (| ONS. | NET W | /EIGHT | LEN | GTH | VIBRATIO ISO 2892 | | SOUND PRESS. | SOUND POWER | AIR INLET |
|-------------|-------------|------|-----|---------|----------|---------------|-------|------|-------|--------|-------|-----|----------------------|---|-----------------|----------------|-----------|
| | | hp | W | in. | mm | rpm | cfm | l/s | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP873C-HD | 8940177048 | 0.67 | 500 | - | - | 3500 | - | - | 2.31 | 1.05 | 8.74 | 222 | <2,5 | - | 88.5 | 88.5 | 1/4 in |
| CP873C-HDES | 8940177047 | 0.67 | 500 | - | - | 3500 | - | - | 2.56 | 1.16 | 11.85 | 301 | <2,5 | - | 88.7 | 88.7 | 1/4 in |















CP874

HIGH-SPEED CUTTING

FEATURES AND BENEFITS

- Wheel diameter 2-7/8" (73 mm)
- Adjustable speed regulator
- Lock-off lever to prevent accidental start-up
- Rear exhaust



CP835

NIBBLER CUTTING CONTROL

FEATURES AND BENEFITS

- Rugged head with 0.177" diameter punch which can cut steel up to 0.060" , (16 gauge) and aluminum up to .102" (10 gauge)
- Easy access to punch and die for quick replacement
- Lock-off lever for low-speed starting
- 4 optional cutting positions







CP9116

POWERFUL & EASY TO USE

FEATURES AND BENEFITS

- 4" (100 mm) for better reach and easy access to restricted areas
- Composite grip to reduce cold air transmission to operators and 360° swivel air inlet for better maneuvrability
- Spindle lock system for easier wheel changing and safety throttle lever to prevent accidental start up
- 11 position adjustable swivel guard - 126° adjustable for better operator protection & greater visibility of cutting operations
- Cutting disc size : 4" / 100 mm (1/16" X 3/8") (1/8" X 3/8") (Supplied with 5 Norton cutting discs)

CUTTING WHEEL FOR CP874

see details on page 110

See accessories page 110

| MODEL | PART NUMBER | POV | WER | CHUCK/W | HEELSIZE | FREE SPEED | | CONS. OAD | NET W | /EIGHT | LEN | GTH | | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|------|-----|---------|----------|---------------|-----|--------------|-------|--------|-------|-----|-----|-----------------------|-----------------|----------------|-----------|
| | | hp | W | in | mm | rpm | cfm | I/s | lb | kg | in. | mm | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP874 | T025375 | 0.5 | 370 | 3 | 75 | 22,000 | 12 | 5.9 | 1.74 | 0.79 | 7.24 | 184 | 4 | 4 | 99 | 88 | 1/4 |
| CP835 | T022550 | 0.42 | 316 | - | - | - | 17 | 8 | 1.3 | 0.59 | 8.5 | 216 | 5.4 | 3 | 86 | 97 | 1/4 |
| CP9116 | 8941091160 | 1 | 746 | 4 | 100 | 14,000 | 7 | 3.3 | 3.97 | 1.8 | 14.57 | 370 | 3 | 3 | 97 | 86 | 1/4 |

Listed specifications are for reference only. Please check documents in each tool.

Cordless Tire Buffer



CP8323 CORDLESS TIRE BUFFER KIT

Output 7/16"

PNEUMATIC PERFORMANCE. **CORDLESS MOBILITY.**

Whether in the shop or on the road, get the job done faster with the CP8323 cordless tire buffer. With 2 speed settings, a quick change chuck, and integrated LED lighting, the CP8323 brings increased mobility, efficiency, and comfort to your fingertips.



CP8323 CORDLESS TIRE BUFFER BARE TOOL

Includes only the cordless tire buffer unit.

CP8323 CORDLESS TIRE BUFFER KIT NA VERSION

Same features as CP8323 Kit with a North American battery charger.





FEATURES AND BENEFITS

- Two speeds for different tasks drilling speed (0-1200 rpm) and buffing speed (0-2500 rpm) for more versatility
- Battery allows mobility for use both inside and outside workshops, providing flexibility in various environments
- Thanks to LED Light, visibility is enhanced when working inside tires
- Compact and Lightweight tool only 1.16 kg (including battery) and has a length of 306 mm, making it easy to maneuver
- Combines the high performance of an air tire buffer with the benefits of being cordless.

| MODEL | PART NUMBER | BATTERY CAPACITY | | K MAX ACITY | FREE SPEED | NET W | /EIGHT | LEN | GTH | WEIGHT BAT | WITHOUT TERY | VIBRA LEV ISO 2892 | | SOUND PRESS. | SOUND POWER |
|--|-------------|---------------------|------|----------------|---------------|-------|--------|-------|-----|---------------|-----------------|--------------------------|-----|-----------------|----------------|
| | | Ah | in. | mm | rpm | lb | kg | in. | mm | lb | kg | а | k | ISO 1574 | 14 - dB(A) |
| CP8323 CORDLESS TIRE BUFFER KIT | 8941183230 | 2 | 7/16 | 11 | 2500 | 2.62 | 1.19 | 12.09 | 307 | 1.96 | 0.9 | 10.6 | 4.9 | 66.4 | 77.4 |
| CP8323 CORDLESS TIRE BUFFER BARE TOOL | 8941083230 | 2 | 7/16 | 11 | 2500 | 1.96 | 0.9 | 9.88 | 251 | 1.96 | 0.9 | 10.6 | 4.9 | 66.4 | 77.4 |
| CP8323 CORDLESS TIRE BUFFER KIT NA VERSION | 8941283230 | 2 | 7/16 | 11 | 2500 | 2.62 | 1.19 | 12.09 | 307 | 1.96 | 0.9 | 10.6 | 4.9 | 66.4 | 77.4 |

Speciality tools

Files - Caulking























CP9710

IDEAL FOR DEBURRING, SHARPENING IN CONFINED AREAS

FEATURES AND BENEFITS

- Lock-offlever to prevent accidental start-up
- 360° swivel air inlet
- Rubber handle grip for better operator's comfort



8-1/2x2 - 50x210 mm





CP9885

EASY TO HANDLE AIR CAULKING GUN

FEATURES AND BENEFITS

- Labor time saving
- Durable thanks to its aluminum housing
- Lightweight design for easier handling
- Trigger controlled material flow
- Accepts standard cartridges: 2" x 8-1/2" (50x210 mm)

See accessories page 110

| MODEL | PART NUMBER | AIR C | | NET W | EIGHT | LEN | GTH | VIBRATIC ISO 2892 | | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|-------|-----|-------|-------|------|-----|----------------------|---|-----------------|----------------|-----------|
| | | cfm | l/s | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP9705 | 6151939705 | 5.9 | 2.8 | 1.23 | 0.56 | 8.03 | 204 | 16.4 | 5 | 77 | 88 | 1/4 in |
| CP9710 | 6151939710 | 5.9 | 2.8 | 1.3 | 0.59 | 9.84 | 250 | 16.4 | 5 | 73 | 84 | 1/4 in |

| MODEL | PART NUMBER | AIR C @LC | | LEN | GTH | NET W | /EIGHT | VIBRATIO ISO 2892 | | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|--------------|-----|-------|-----|-------|--------|----------------------|---|-----------------|----------------|-----------|
| | | cfm | l/s | in. | mm | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP9885 | 6151979885 | 17 | 8 | 10.63 | 270 | 2.29 | 1.04 | <2.5 | - | 82 | 72 | 1/4 |

Listed specifications are for reference only. Please check documents in each tool.

Speciality tools

Riveting tools

3/16"- 4.8 mm











EASY-TO-USE AND RELIABLE

FEATURES AND BENEFITS

- 3/16" (4.8 mm) maximum capacity (for rivets in Aluminum, copper and softer materials)
- Heavy pulling: up to 2,200 lbs (1,000 kg)
- Transparent container with holes for quick release of rivet ends
- Includes: nose pieces for rivets 3/32", 1/8", 5/32" and 3/16" (2.4, 3.2, 4 and 4.8 mm)

Up to 5.0mm Stainless Steel Rivets











Up to 7.8 mm Structural blind rivet Bulb-Tite









CP9887

PROFESSIONAL & COMFORTABLE OPERATION OF RIVETS!

FEATURES AND BENEFITS

- · Powerful with high setting forces
- Comfortable and safe with low vibration and kickback
- Cold insulating composite handle higher comfort
- Flexible air connection with 360° rotation option
- Robust with an industrial-grade aluminum alloy cylinder material

| MODEL | PART NUMBER | MAX A PULLING | | AIR C | | LEN | GTH | NET W | EIGHT | VIBRATIO ISO 2892 | | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|------------------|-------|-------|-----|-------|-----|-------|-------|----------------------|-----|-----------------|----------------|-----------|
| | | lb@85psi | kg | cfm | l/s | in. | mm | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP9882 | 8941098820 | 2,200 | 1,000 | 4 | 1.9 | 8.86 | 225 | 3.31 | 1.5 | <2.5 | - | 73 | 62 | 1/4 |
| CP9886 | 8941098860 | - | - | 8.5 | 4 | 10.91 | 277 | 3.75 | 1.7 | 2.5 | 0.6 | 77.8 | 88.8 | 1/4 |
| CP9887 | 8941098870 | - | - | 8.7 | 4.1 | 12.8 | 325 | 5.51 | 2.5 | 2.5 | 0.6 | 77.8 | 88.8 | 1/4 |







CP9888

Rivet nuts from M3 to M12

PROFESSIONAL& COMFORTABLE OPERATION OF RIVETS!

If you are looking for high productive riveters including convenient features to get your job done fast and safe without any compromise, our CP988 series is designed to answer all your assembly needs.





FEATURES AND BENEFITS

- Powerful with high setting forces
- Comfortable and safe with low vibration and kickback
- Cold insulating composite handle higher comfort
- Flexible air connection with 360° rotation option
- Robust with an industrial-grade aluminum alloy cylinder material

Automatic function to thread and unthread rivet nuts for fast processing Large reverse switch on the back (only necessary in case of correction) Precise setting stroke adjustment from 1-7mm

Blind rivet nuts are applied to metal sheets when a thread is needed. It is a preparation for a non-permanent connection type (thread + screw)

Step 2 and Step 4 are performed automatically by the CP9888

→ Very fast processing



Step1

Put the rivet nut into the hole of the metal sheet



Step 2

Threading the blind nut riveter into the blind rivet nut



Step 3

Setting the rivet nut by axial force



Step 4

Unthreading the blind nut riveter from the blind rivet nut



Step 5

Add e.g. a second metal sheet and turn in the screw

| MODEL | PART NUMBER | | AXIAL G LOAD | | CONS. OAD | LEN | IGTH | NET W | EIGHT | | ON LEVEL 27 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|----------|-----------------|-----|--------------|-------|------|-------|-------|-----|-----------------------|-----------------|----------------|-----------|
| | | lb@85psi | kg | cfm | l/s | in. | mm | lb | kg | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP9888 | 8941098880 | - | - | 5.9 | 2.8 | 11.02 | 280 | 4.85 | 2.2 | 2.5 | 0.6 | 77.8 | 88.8 | 1/4 |



Accessories Specialty tools



RECOMMENDED ACCESSORIES

| ACCESSORY'S DESCRIPTION | PART NUMBER |
|--|-------------|
| File rectangular shank 3/16" (5mm), 5pcs | 2050519113 |
| File round shank 3/16" (5mm), 5pcs | 2050519123 |
| File half round shank 3/16" (5mm), 5pcs | 2050519133 |
| File triangular shank 3/16" (5mm), 5pcs | 2050519143 |

NOSE PIECES FOR CP9882 AIR RIVETER



| ACCESSORY'S DESCRIPTION | PART NUMBER |
|----------------------------------|-------------|
| Nose piece (SET OF 4 pcs. below) | 8950250361 |
| 2,4mm Nose Piece 3/32" | 8950250360 |
| 3,2mm Nose Piece 1/8" | 8950250359 |
| 4,0mm Nose Piece 5/32" | 8950250358 |
| 4,8mm Nose Piece 3/16" | 8950250357 |

JAW SETS FOR CP9883/9884



| ACCESSORY'S DESCRIPTION | PART NUMBER |
|-------------------------|-------------|
| Jaw Housing Set CP9883 | 8940167682 |
| Jaw Housing Set CP9884 | 8940167716 |



WHEELS FOR CP874

| ACCESSORY'S DESCRIPTION | PART NUMBER |
|---|-------------|
| Set of 5 wheels Ø 2-7/8"x1/16"x3/8" - 73x1,6x9,52mm | CA155312 |

CLASSIC TOOLS





There comes a time when the best-known products go beyond the standard they set to become must-have Classics.

CP is proud to bring together the tools you already know:

THE CLASSIC RANGE

For decades, these Classic CP products have been getting the job done and feature the authentic styling you have come to love.

Limited (2-Year) Warranty for CP Classic range

With the Classic range of products, CP warrants its material and workmanship, because these products have been selected, tested, and proven by thousands and thousands of tool users, year after year.



Limited 2-year warranty extension REQUIRES registration of each tool on the CP website within 4 weeks of the original pur-chase date.

Visit www.cp.com/classic for more info.

Classic tools

Impact Wrenches 1/2"- 3/4"













CP734H

THE "CLASSIC" **REFERENCE FOR 1/2"**

FEATURES AND BENEFITS

- Metal motor housing with pin clutch mechanism in oil bath (dyna-pact) for high durability and smooth operations
- Comfortable tool with rubber grip and reverse button with 4 positive power settings











CP749

POWERFUL & ROBUST, BETTER ERGONOMICS

FEATURES AND BENEFITS

- Metal motor housing with CP's patented clutch in oil bath for high durability.

 • 4-power settings for better versatility
- Compact design with comfortable contoured handle















CP772H

THE UNMATCHED "REFERENCE" IN 3/4" **IMPACT**

FEATURES AND BENEFITS

- Metal motor housing with pin clutch mechanism in oil bath (dyna-pact) for high durability and smooth operations
- Comfortable tool with rubber grip and reverse button with 4 positive power settings





CP772H-6

Same feature as CP772H with 6" (152 mm) extended anvil

| MODEL | PART NUMBER | DRIVE | IMPACT MECANISM | BLOWS PER MINUTE | FREE SPEED | WORKING (F | TORQUE W) | MAX TO | ORQUE EV) | NET W | EIGHT | LEN | GTH | | CONS | VIBRATIO ISO 2892 | | | SOUND POWER | |
|----------|-------------|-------|--------------------|------------------------|---------------|---------------|--------------|--------|--------------|-------|-------|-------|-----|-----|------|----------------------|-----|----------|----------------|-----|
| | | in. | | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP734H | T024351 | 1/2 | Pin clutch | 1,020 | 8,400 | 25.1-310 | 34-420 | 425 | 576 | 5.11 | 2.32 | 7.52 | 191 | 15 | 7.1 | 7.2 | 3.3 | 93 | 104 | 1/4 |
| CP749 | T024587 | 1/2 | Twin hammer | 1,320 | 6,400 | 50.2-450 | 68-610 | 610 | 827 | 5.51 | 2.5 | 7.01 | 178 | 22 | 10.4 | 6.2 | 2 | 96 | 107 | 1/4 |
| CP772H | T024598 | 3/4 | Pin clutch | 900 | 4,200 | 150-700 | 203-949 | 1,000 | 1,350 | 10.4 | 4.76 | 9.65 | 245 | 24 | 11.3 | 5.8 | 2 | 96 | 107 | 3/8 |
| CP772H-6 | T024757 | 3/4 | Pin clutch | 900 | 4,200 | 150-700 | 203-949 | 1,000 | 1,350 | 11.6 | 5.3 | 15.51 | 394 | 24 | 11.3 | 5.8 | 2 | 96 | 107 | 3/8 |

Impact & Ratchet Wrenches - Screwdrivers



















800 RPM

1/4" Screwdriver





THE CLASSIC **ROBUSTNESS FOR GENERAL REPAIR**

FEATURES AND BENEFITS

- Fast screw fastening in cushion clutch high torque for better productivity
- External clutch adjustment
- Convenient single-handed forward/ reverse for better ease of use
- Robust aluminum body and steel clutch housing
- Convenient single-handed forward/ reverse for better ease of use

1,800 RPM







CP797-6

THE TRUCK TIRE **REFERENCE**

FEATURES AND BENEFITS

- 1,400 ft.lbs (1,898 Nm) of max torque in reverse position for high productivity
- Metal housing and rocking dog impact mechanism for high durability and smooth operation
- Convenient reverse valve and teasing trigger for better comfort in use

CP797

Same features as CP797-6 in short anvil

CP797SP6

Same features as CP797-6 with spline socket retainer

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

CP828H

easier lubrication

DURABLE

Same feature as CP828 with 1/2"

FEATURES AND BENEFITS

lead to greater durability

Aluminium alloy head and CP's

patented TriSpring anti-slip head design

Grease fitting on the reverse button for

See accessories page 119

| MODEL | PART NUMBER | DRIVE | IMP. MECA | | BLOWS PER MINUTE | FREE SPEED | | G TORQUE W) | | ORQUE EV) | NET W | EIGHT | LEN | GTH | | CONS OAD | VIBRATIO ISO 2893 | ONLEVEL 27 (M/S2) | | SOUND POWER | AIR INLET | |
|----------|-------------|-----------|-----------------|---------------|---------------------|---------------|-----------|----------------|----------------|--------------|-------|---------------|-------|-----|------------------|-------------|----------------------|----------------------|----------|----------------|--------------|--|
| | | in. | | | | rpm | ft.lb | Nm | ft.lb | Nm | lb | kg | in. | mm | cfm | I/s | а | k | ISO 1574 | 14 - dB(A) | in. | |
| CP797 | T019139 | 1 | Double ro | cking dog | 1,080 | 4,200 | 150-900 | 203-1,220 | 1,400 | 1,890 | 27 | 12.2 | 15.51 | 394 | 60 | 28.2 | 12.8 | 4.3 | 110 | 121 | 1/2 | |
| CP797-6 | T013901 | 1 | Double ro | cking dog | 1,080 | 4,200 | 148-904 | 200-1,220 | 1,400 | 1,890 | 29.7 | 13.4 | 22.24 | 565 | 40 | 18.9 | 12.8 | 4.3 | 110 | 121 | 1/2 | |
| CP797SP6 | T018653 | #5 Spline | Double ro | cking dog | 1,080 | 4,200 | 148-904 | 200-1,220 | 1,400 | 1,890 | 29.7 | 13.4 | 22.24 | 565 | 40 | 18.9 | 12.8 | 4.3 | 110 | 121 | 1/2 | |
| MODE | EL | PAR | RT NUMBE | R | DRIVE | FF | REE SPEED | | TORQU (REV) | E | | TORQU REV) | E | | ERALL NGTH | | NET WE | EIGHT | AIR Co | | IR INLET | |
| | | | | | in. | | rpm | ft.lb | N | lm | ft.lb | N | m | in. | m | m | lb | kg | cfm | l/s | in. | |
| CP828 | | T | 022708 | | 3/8 | | 150 | 9.6 | 1 | 3 | 51.6 | 7 | 0 | 10 | 25 | 54 | 2.43 | 1.1 | 15 | 7.1 | 1/4 | |
| CP828H | | T | 022970 | | 1/2 | | 150 | 9.6 | 1 | 3 | 51.6 | 7 | 0 | 10 | 25 | 54 | 2.43 | 1.1 | 15 | 7.1 | 1/4 | |
| MODEL | PART NU | | OUTPUT DRIVE | FREE SPEED | MIN TOF | RQUE (F\ | W) MAX | TORQUE (F | W) | NET WE | EIGHT | LI | ENGTH | | REE SP AIR CO | | VIBRATIO ISO 2892 | | | SOUND POWER | | |
| | | | in. | | ft.lb | Nn | n ft.l | b Nn | n | lb | kg | in. | mr | n c | fm | l/s | а | k | ISO 1574 | 4 - dB(A) | in. | |
| CP781 | T025 | 096 | 1/4 | 800 | 4.6 | 6.2 | 2 8.3 | 3 11. | 3 | 3 | 1.36 | 8.9 | 22 | 6 2 | 25 | 11 | - | <2,5 | 99.5 | 110.5 | 1/4 | |
| CP782 | T025 | 097 | 1/4 | 1,800 | 2.6 | 3.5 | 5 3.7 | 7 4.9 | 7 : | 2.49 | 1.13 | 9.6 | 5 24 | 5 1 | 16 | 7.6 | - | <2,5 | 93.9 | 104.9 | 1/4 | |

Classic tools

Die & Angle Grinders

6 mm (1/4") 24,000 RPM



100 mm (4") 13,000 RPM



180 mm (7") 7,500 RPM











DURABLE PARTNER FOR GENERAL MAINTENANCEUSE

FEATURES AND BENEFITS

- Rugged and energy efficient 0.54 hp (400 W) motor for better productivity
- Adjustable speed regulator & lock-off throttle
- Square handle design for greater comfort









CP854

EFFICIENT AND DURABLE

FEATURES AND BENEFITS

- High performance motor for high efficiency with its 0.6 hp (450 W)
- Helical bevel gear design & aluminum alloy housing for high durability
- 4" (100 mm) wheel capacity









CP857

POWERFUL AND DURABLE FOR GENERAL MAINTENANCE

FEATURES AND BENEFITS

- High performance motor for high efficiency with its 1.3 hp (940 W)
- Helical bevel gear design & aluminum alloy housing for high durability
- 7" (180 mm) wheel capacity

CP860E

Same features as CP860 with 6 mm collet

CP860ES

Same features as CP860 with extended shank (6" - 152 mm)

CP854E

Same features as CP854 with 5" (125 mm) wheel capacity

CP860ESE

Same features as CP860 with extended shank & 6 mm collet

| MODEL | PART NUMBER | FREE SPEED | PC | WER | | COLLET | | R CONS | | NET W | EIGHT | LEN | GTH | VIBRATIC ISO 2892 | | SOUND PRESS. | SOUND POWER | AIR INLET |
|----------|-------------|---------------|------|-----|-----|----------------|-------------------|--------|--------------|-------|--------|-------|------|----------------------|---------------------------|-----------------|----------------|--------------|
| | | rpm | hp | W | ir | n. (mm) | cfm | | l/s | lb | kg | in. | mm | а | k | ISO 15744 | l - dB(A) | in. |
| CP860 | T019704 | 24000 | 0.54 | 400 | 1/4 | (6.4mm) | 21 | | 9.9 | 1.26 | 0.57 | 5.75 | 146 | 3.7 | 1.6 | 92.5 | 103.5 | 1/4 |
| CP860E | T021136 | 24000 | 0.54 | 400 | 1/4 | (6.4mm) | 21 | | 9.9 | 1.26 | 0.57 | 5.75 | 146 | 3.7 | 1.6 | 92.5 | 104 | 1/4 |
| CP860ES | T023193 | 24000 | 0.54 | 400 | 1/4 | (6.4mm) | 23 | | 10 | 2.09 | 0.95 | 11.57 | 294 | 3.7 | 1.5 | 92.6 | 103.5 | 1/4 |
| CP860ESE | T023354 | 24000 | 0.54 | 400 | 1/4 | (6.4mm) | 23 | | 10 | 2.09 | 0.95 | 11.57 | 294 | 3.7 | 1.5 | 93 | 103.6 | 1/4 |
| MODEL | PART NUMBER | FREE SPEED | POV | VER | | WHEEL ACITY | SPINDLE THREAD | | CONS. OAD | NET V | VEIGHT | LE | NGTH | | TION LEVE 28927 (M/S2) | SOUND PRESS. | SOUND POWER | |
| | | rpm | hp | W | in. | mm | in. | cfm | l/s | lb | kg | in. | mm | а | k | ISO 157 | 44 - dB(A) | in. |
| CP854 | T023186 | 13000 | 0.7 | 520 | 4 | 100 | 3/8-24 UNF | 24 | 11 | 3.75 | 1.7 | 9.02 | 229 | 4.9 | 1.5 | 85 | 96 | 1/4 |
| CP854E | T023187 | 12000 | 0.7 | 520 | 5 | 125 | M10 | 16 | 7.6 | 3.75 | 1.7 | 9.02 | 229 | 4.9 | 1.5 | 85 | 96 | 1/4 |
| CP857 | T024387 | 7500 | 1.26 | 940 | 7 | 180 | 5/8-11 UNC | 24 | 11 | 6.17 | 2.8 | 13.15 | 334 | 4 | 1.3 | 102 | 113 | 3/8 |

Drills

10 mm (3/8") 2,400 RPM













DURABILITY AND SMOOTH OPERATION

FEATURES AND BENEFITS

- Powerful and efficient motor resists to stalls
- Handle exhaust allowing the air to flow away from the operator

























CP789HR

REVERSIBLE, HIGH TORQUE & DURABILITY

FEATURES AND BENEFITS

- Thermoplastic rubber handle grip for better operator comfort
- Teasing trigger allowing more control to start holes
- Industrial quality Jacobs chuck and gearbox for high durability

CP785QC

Same features as CP885C with keyless chuck

CP785H

Same features as CP885C with 1/2" (13 mm) chuck capacity

CP789R-42

Same features as CP789R-26 with 4200 rpm free speed

| MODEL | PART NUMBER | FREE SPEED | POV | WER | CHUCK | CAPACITY | SPINDLE | STALL | TORQUE | NET W | /EIGHT | LEN | GTH | | CONS. OAD | | ON LEVEL 27 (M/S2) | SOUND PRESS. | | AIR INLET |
|-----------|-------------|---------------|------|-----|-------|----------|---------|-------|--------|-------|--------|------|-----|-----|--------------|------|-----------------------|-----------------|------------|--------------|
| | | rpm | hp | W | in. | mm | in. | | | cfm | l/s | lb | kg | in. | mm | а | k | ISO 157 | 44 - dB(A) | in. |
| CP785 | T022698 | 2,400 | 0.5 | 370 | 3/8 | 10 | 3/8-24 | 3.1 | 4.2 | 2.25 | 1.02 | 7.01 | 178 | 17 | 8 | <2,5 | - | 90 | 101 | 1/4 |
| CP785H | T024134 | 500 | 0.5 | 370 | 1/2 | 13 | 3/8-24 | 11.4 | 15.4 | 3 | 1.36 | 7.76 | 197 | 12 | 6 | <2,5 | - | 96 | 107 | 1/4 |
| CP785QC | T024242 | 2,400 | 0.5 | 370 | 3/8 | 10 | 3/8-24 | 3.1 | 4.2 | 2.25 | 1.02 | 7.01 | 178 | 12 | 6 | <2,5 | - | 90 | 101 | 1/4 |
| CP789HR | T025165 | 500 | 0.43 | 320 | 1/2 | 13 | 3/8-24 | 15.6 | 21.1 | 3.24 | 1.47 | 7.99 | 203 | 29 | 14 | <2.5 | - | 99 | 110 | 1/4 |
| CP789R-26 | T025180 | 2,600 | 0.43 | 320 | 3/8 | 10 | 3/8-24 | 3.1 | 4.2 | 2.49 | 1.13 | 7.01 | 178 | 29 | 14 | <2.5 | - | 95 | 106 | 1/4 |
| CP789R-42 | T025198 | 4,200 | 0.43 | 320 | 3/8 | 11 | 3/8-24 | 1.8 | 2.5 | 2.49 | 1.13 | 7.01 | 178 | 29 | 14 | <2.5 | - | 96 | 107 | 1/4 |

Classic tools

Hammers & Belt Sander











DURABILITY & PRECISION

FEATURES AND BENEFITS

- Heavy duty pistol grip hammer
- Speed regulator and positive action trigger for precise control
- High durability thanks to its aluminum housing









POWER & DURABILITY

FEATURES AND BENEFITS

- Heavy duty pistol grip hammerStandard .498" round shank
- Positive action trigger for a better precision









CP858

PRODUCTIVITY & DURABILITY

FEATURES AND BENEFITS

- Quick change belt replacement for easier maintenance
- Handle exhaust for better operator comfort
- Adjustable sanding arm

CP714 Kit

See details on page 118

CP717 Kit

See details on page 118

| MODEL | PART NUMBER | ВО | RE | STR | OKE | | SHANK | | BLOWS PER MINUTE | | CONS. OAD | WE | GHT | LEN | IGTH | | ATION VEL 27 (M/S2) | | SOUND DOWER | |
|-------|-------------|---------------|-----|------|-------|-----------|-------|------|---------------------|-----|---------------|------|--------|-------|------|-------------------------------|---------------------------|----------|----------------|--------------|
| | | in. | mm | in. | mm | shape | in. | mm | | in. | mm | lb | kg | in. | mm | а | k | ISO 157 | '44 - dB(A) | in. |
| CP714 | T012735 | 0.55 | 14 | 3.15 | 80 | Round | 0.401 | 10.2 | 2000 | 8.5 | 4 | 3.33 | 1.51 | 7.48 | 190 | 13.2 | 5.8 | 95 | 102.5 | 1/4 |
| CP717 | T020120 | 0.75 | 19 | 2.68 | 68 | Round | 0.402 | 12.7 | 1800 | 12 | 5.9 | 4.74 | 2.15 | 7.48 | 190 | 20.4 | 6.2 | 91.5 | 106 | 1/4 |
| | | | | | | | | | | | | | | | | | | | | |
| MODEL | PART NUMBER | FREE SPEED | PO | WER | BEL | T CAPACIT | Υ | | CONS. E SPEED | | CONS. LOAD | NET | WEIGHT | LENG | GTH | VIBRAT LEVE ISO 28927 (| L | | SOUND POWER | AIR INLET |
| | | rpm | hp | W | in. | m | m | cfm | l/s | cfm | l/s | lb | kg | in. | mm | а | k | ISO 1574 | 4 - dB(A) | in. |
| CP858 | T025179 | 18000 | 0.4 | 300 | 3/8x1 | 3 10x | 330 | 22 | 10 | 46 | 22 | 1.87 | 0.85 | 10.83 | 275 | <2.5 | - | 92.8 | 103.8 | 1/4 |













INTENSE CUTTING

FEATURES AND BENEFITS

- Great power and speed of 9,500 strokes per minute
- Rugged construction designed for intensice use
- Adjustable guard guideComfortable rubber grip
- Includes (1) 32T saw blade











CP785S

RELIABLE & POWERFUL

FEATURES AND BENEFITS

- Powerful motor with 0.5 hp (370 W) which can cut metal up to 18-gauge (1.1 mm - 0.04")
- Triple idler planetary gearing for better reliability
- Ergonomic handle design











CP861

DURABILITY & POWER

FEATURES AND BENEFITS

- Heavy-duty high speed cutter
- Rugged, energy efficient 0.5hp (370 W) motor
- Lightweight tool: 1.63 lbs (0.74kg)
- Square handle design for positive grip
- Lock-off lever to prevent accidental start-up

WHEELS FOR CP861



ACCESSORY'S DESCRIPTION

Set of 5 wheels Ø 2-7/8"x1/16"x3/8" - 73x1,6x9,52mm

CA155312

| MODEL | PART NUMBER | STROKES PER MINUTES | | ROKES NGHT | | CONS. LOAD | NET W | EIGHT | LEN | IGTH | | ON LEVEL 927 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
|--------|-------------|------------------------|---------|---------------|---------------|--------------------|-------|----------|-------|------|------------------------|------------------------|-----------------|----------------|-----------|
| | | | in. | mm | cfm | l/s | in. | mm | lb | kg | а | k | ISO 1574 | 44 - dB(A) | in. |
| CP881 | T023916 | 9500 | 3/8 | 10 | 5.9 | 2.8 | 1.63 | 0.74 | 8.62 | 219 | 23.2 | 6.6 | 95 | 84 | 1/4 |
| MODEL | PART NUMBER | STROK PER M | | | CONS. .OAD | NET W | EIGHT | l | ENGTH | | VIBRATION ISO 28927 | | SOUND PRESS. | SOUND POWER | AIR INLET |
| | | | | cfm | I/s | lb | kg | in. | m | ım | а | k | ISO 1574 | 14 - dB(A) | in. |
| CP785S | T023200 | 2400 | 0 | 15 | 7.3 | 1.9 | 0.86 | 9.02 | 2 2 | 29 | 10.5 | 3.2 | 95 | 84 | 1/4 |
| MODEL | PART NUMBER | POWER (| CHUCK/W | /HEELSIZE | FREE SPEED | AIR CONS. @LOAD | NE | T WEIGHT | LE | NGTH | | ON LEVEL 927 (M/S2) | SOUND PRESS. | SOUND POWER | AIR INLET |
| | | W | in | mm | rpm | cfm l/s | s lb | kg | in. | mm | а | k | ISO 1574 | 44 - dB(A) | in. |
| CP861 | T022039 | 370 | 3 | 75 | 20000 | 8.5 4 | 1.6 | 3 0.74 | 7.76 | 197 | 9.2 | 2.8 | 90 | 79 | 1/4 |

Classic tools

IMPACT, RATCHET & HAMMER KITS



CP734H Kit

Part No. T025163

Kit includes:

- (1) CP734 1/2" Impact
- (5) SAE Sockets 1/2", 5/8", 3/4", 7/8" & 15/16" or

Part No. T025164

Kit includes:

- (1) CP734 1/2" Impact
- (5) Metric Sockets (14, 16, 17, 19 & 22 mm)



CP772HK

Part No. T025171

Kit includes:

- (1) CP772H 3/4" Impact
- (4) SAE Sockets 15/16", 1", 1-1/16" & 1-1/8" or

Part No. T025162

Kit includes:

- (1) CP772H 3/4" Impact
- (4) Metric Sockets (24, 27, 30 & 32 mm)



CP828HK-Metric

Part No. T024448

Kit includes:

- (1) CP828H 1/2" Rachet
- (5) Metric Sockets 10, 13, 14, 16 & 17 mm



CP714 Kit

Part No. T025364

Kit includes:

- T012735 CP714 Hammer
- A046073* Flat Chisel
- A046078* Tapered Punch
- A046074 Blank Chisel
- A046071 Twin Blade Panel Cutter



CP717 Kit

Part No. T025365

Kit includes:

- T020120 CP717 Hammer
- A047071 Twin Blade Panel Cutter
- A047050 Rivet Cutter
- A047091 1-1/4" Smoothing Hammer
- A047074 Straight Punch



Accessories Classic tools



| TOOL'S MODEL | TUNE UP KIT PART NUMBER | REPAIR KIT PART NUMBER | REPLACEMENT HEAD |
|---------------|----------------------------|---------------------------|---------------------|
| CP734H | CA147716 | CA147717 | |
| CP772H | CA149746 | CA149747 | |
| CP797/CP797-6 | CA131501 | | |
| CP828 | CA155086 | | CA155084 |
| CP828H | | | CA155085 |
| CP854/E | C138089 | | |
| CP749 | 8940158635 | | |

PROTECTIVE COVERS



| | TOOL'S MODEL | ACCESSORY'S PART NUMBER |
|-----|--------------|----------------------------|
| CP7 | 34H | CA129405 |
| CP7 | 72H | CA124745 |
| CP8 | 28 | CA133961 |
| CP8 | 28H | CA133961 |

DRILL CHUCKS



| TOOL'S MODEL | CAPA | ACITY | THREAD | CHUCK PART NUMBER | TYPE | KEY PART NUMBER |
|------------------|------|-------|---------|-------------------|-----------------------------|-----------------|
| | in. | mm | in. | | | |
| CP785, CP789R-26 | 3/8" | 10 | 3/8"-24 | C142408 | Chuck +Key | CA050120 |
| CP785H, CP789HR | 1/2" | 13 | 3/8"-24 | 2050486963 | Chuck +Key | |
| CP785QC | 3/8" | 10 | 3/8"-24 | 2050502063 | Keyless chuck | |
| CP785 | 3/8" | 10 | 3/8"-24 | 40002 | Chuck +Key | |
| OF 100 | 3/8" | 10 | 3/8"-24 | CA146490 | Keyless (CP785 Metric only) | |

GUARD FOR CP854 AND CP857



| DESCRIPTION | ACCESSORY'S PART NUMBER |
|-------------------|----------------------------|
| 4" (100 mm) Guard | C136898 |
| 5" (125 mm) Guard | KF141860 |
| 7" (175 mm) Guard | C139081 |

REAR EXHAUST HOSE ASSEMBLY FOR CP860/E/ES/ESE DIE GRINDERS AND CP734H



| DESCRIPTION | ACCESSORY'S PART NUMBER |
|---------------------------------------|----------------------------|
| Rear exhaust hose assembly, includes: | CA127175 |
| Attachment Ferrule | KF127211 |

SAW BLADE FOR CP881



| DESCRIPTION | PART NUMBER |
|--------------------|-------------|
| 18T Saw blades (5) | CA146719 |
| 24T Saw blades (5) | CA146720 |
| 32T Saw blades (5) | CA146721 |

WHEEL FOR CP861



| DESCRIPTION | PART NUMBER |
|---|-------------|
| Package of 5 wheels (ø 2-7/8"x1/16"x3/8" - 73x1.6x9.52 mm) | CA155312 |

| Notes | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

WORKSHOP EQUIPMENT




Jack Stands





CP82 SERIES

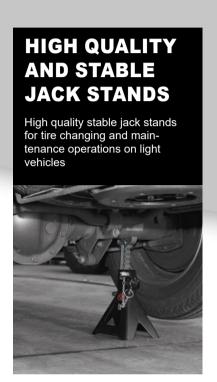



FEATURES AND BENEFITS

- Feet with extra large plate for high stability resistant to sinking into the ground
- Self-locking handle with composite tip and locking pin bring high security
- Ductile iron support column and rugged steel frame construction for durability and
- Ratchet action for height adjustment to ease operation
- Sold by pair

| MODEL | PART NUMBER | CAF | CAPACITY | | GHT | MIN. H | EIGHT | MAX H | EIGHT | STR | OKE | WII | OTH | DEPTH | | POSITION IN HEIGHT |
|---------|-------------|------|----------|-----|------|--------|-------|-------|-------|-------|-----|------|-----|-------|-----|-----------------------|
| | | tons | lb | kg | lb | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | |
| CP82020 | 8941082020 | 2 | 4400 | 2.5 | 5.5 | 11.02 | 280 | 16.73 | 425 | 7.17 | 182 | 7.7 | 195 | 7.2 | 182 | 10 |
| CP82030 | 8941082030 | 3 | 6610 | 3 | 6.6 | 11.81 | 300 | 17.91 | 455 | 7.17 | 182 | 9.8 | 250 | 7.2 | 182 | 11 |
| CP82060 | 8941082060 | 6 | 13200 | 5 | 11.0 | 15.75 | 400 | 24.41 | 620 | 10.16 | 258 | 11.1 | 283 | 10.2 | 258 | 12 |
| CP82120 | 8941082120 | 12 | 26400 | 10 | 22.0 | 11.81 | 300 | 17.72 | 450 | 5.91 | 150 | - | - | 5.9 | 150 | - |
| CP82200 | 8941082200 | 20 | 44000 | 18 | 39.7 | 13.78 | 350 | 19.69 | 500 | 5.91 | 150 | - | - | 7.8 | 200 | - |










CP81 SERIES

VERSATILE HIGH LIFT CAPACITY BOTTLE JACKS High lifting capacity bottle jacks for general mechanics, workshop MRO or roadside assistance.





- · Large base plate for high standing and stability
- Double guidance and chromed steel piston made from one piece, thereby providing maximum capacity and durability
- Automatic welded construction for a 100% seal, robustness, and ease of disassembly
- Threaded extension within piston for fast and easy height adjustment
- Safety valve to protect against overloading

See accessories page 131

G

| MODEL | PART NUMBER | CAP | CAPACITY | WE | IGHT | | | | | | | DIMEN | SIONS | | | | | | |
|---------|-------------|------|----------|------|-------|------|-----|-------|-------------|-----|-------------|-------|-------|-----|-----|-----|-----|-----|----|
| WODEL | TARTROWDER | OAL | AOITT | *** | 10111 | А | | A + B | A + B (MAX) | | C (+THREAD) | | D | | E | F | | G | |
| | | tons | lb | kg | lb | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm |
| CP81020 | 8941081020 | 2 | 4400 | 2.4 | 5.29 | 7.1 | 180 | 11.7 | 297 | 2.1 | 52 | 13.7 | 347 | 4.7 | 120 | 3.2 | 80 | 0.8 | 20 |
| CP81030 | 8941081030 | 3 | 6610 | 2.9 | 6.39 | 7.5 | 190 | 12.0 | 304 | 2.4 | 62 | 14.4 | 366 | 4.9 | 125 | 3.4 | 85 | 0.9 | 23 |
| CP81050 | 8941081050 | 5 | 11000 | 3.8 | 8.38 | 7.9 | 200 | 12.7 | 322 | 2.8 | 70 | 15.4 | 390 | 5.5 | 140 | 3.5 | 90 | 1.1 | 29 |
| CP81080 | 8941081080 | 8 | 17600 | 5.8 | 12.79 | 7.9 | 200 | 12.7 | 322 | 2.8 | 72 | 15.5 | 394 | 6.3 | 160 | 3.9 | 100 | 1.4 | 35 |
| CP81120 | 8941181120 | 12 | 26400 | 6.7 | 14.77 | 7.1 | 180 | 10.8 | 275 | 3.0 | 76 | 13.7 | 347 | 6.9 | 175 | 4.7 | 120 | 1.7 | 43 |
| CP81200 | 8941081200 | 20 | 44000 | 9.1 | 20.06 | 7.3 | 185 | 13.2 | 335 | 3.5 | 90 | 18.8 | 478 | 7.7 | 195 | 5.7 | 145 | 2.1 | 53 |
| CP81300 | 8941081300 | 30 | 66100 | 18.3 | 40.34 | 11.2 | 285 | 17.9 | 454 | 2.8 | 70 | 20.2 | 514 | 8.1 | 205 | 5.5 | 140 | 2.4 | 62 |

Lift equipment






CP80 SERIES







FEATURES AND BENEFITS

- Super low pick-up height to go easily under low profile vehicles
- Equipped with a double pump design to increase lifting speed and ergonomic foot pedal for fast approach without load
- Heavy duty steel welded chassis with reinforcing rims to ensure high resistance and durability
- Lifting arm allows high lifting capacities height to max. 550 mm / 21.65 in. for use in SUV or pickup trucks.
- Includes a safety valve to prevent overloading

| MODEL | PART NUMBER | CAF | PACITY | WF | IGHT | | DIMENSIONS WEIGHT | | | | | | | | | | | | | | |
|----------|-------------|------|--------|------|-------|------|-------------------|-----|----|------|-----|------|-----|------|------|-----|-----|------|-----|------|------|
| MODEL | TART NOMBER | 0711 | 7.0111 | | | , | A | В | | (| С | | D | |)2 | E | | F | | (| G |
| | | tons | lb | kg | lb | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm |
| CP80020 | 8941181020 | 2 | 4400 | 39.4 | 86.00 | 16.9 | 430 | 3 | 75 | 19.9 | 505 | 29.5 | 750 | 77.2 | 1960 | 5.9 | 150 | 10.6 | 270 | 1.5 | 39.4 |
| CP80022* | 8941098900 | 2.5 | 5511.5 | 31.5 | 69.44 | 16.7 | 425 | 2.9 | 75 | 19.6 | 500 | 26.9 | 685 | 77.2 | 1960 | 5.9 | 150 | 10.2 | 260 | 13.5 | 345 |
| CP80030 | 8941181030 | 3 | 6610 | 45 | 99.20 | 17.9 | 455 | 3.7 | 95 | 21.7 | 550 | 30.7 | 860 | 77.9 | 1979 | 6.3 | 160 | 6.3 | 160 | 1.7 | 45 |
| CP80031* | 8941181031 | 3 | 6610 | 46 | 99.20 | 17.9 | 455 | 3.7 | 95 | 21.7 | 550 | 30.7 | 860 | 77.9 | 1979 | 6.3 | 160 | 6.3 | 257 | 1.7 | 45 |

^{*} only for NA market.


Workshop equipment

Air Hydraulic Jacks






CP85 SERIES

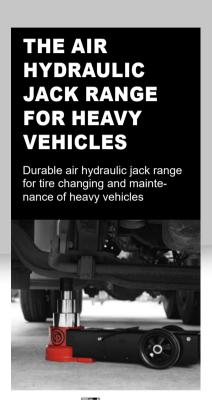





FEATURES AND BENEFITS

- · Air powered piston for fast, high lift capacity on high-axle vehicles
- Hard chromium plated piston guarantees durability and resistance to corrosion
- Low profile construction allows easy access to lift low chassis trucks and buses
- Long handlebar allows easy access and control when fully positioned under
- Handlebar locks in 3 positions: 45°, 90°, and 180° for easy manoeuvring.

| MODEL | PART NUMBER | CAPAC | ITY | WEIGHTDIMENSIONS | | | | | | | | | | | | | | | | | | | |
|---------|-------------|---------------------|-----|------------------|-----|-----|-----|------|-----|------|-----|------|-----|------|-----|-----|-----|----------------|-------------|------|------|-----|----|
| | | | | | | , | A | E | 3 | C |) | [|) | D- | +E | | E | | F | (| 3 | Р | |
| | | Max Lift. Cap. (lb) | Ton | kg | lb | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm |
| CP85030 | 8941085030 | 66,100 | 30 | 38 | 84 | 5.9 | 150 | 6.9 | 176 | 11.5 | 290 | 9.5 | 240 | 12.8 | 326 | 3.4 | 86 | 8.8/11.4 | 223/289 | 53.6 | 1365 | 2.8 | 71 |
| CP85031 | 8941085031 | 66,100 | 30 | 38 | 84 | 5.9 | 150 | 6.9 | 176 | 11.5 | 290 | 9.5 | 240 | 12.8 | 326 | 3.4 | 86 | 8.8/11.4 | 223/289 | 53.6 | 1365 | 2.8 | 71 |
| CP85050 | 8941085050 | 110,000 | 50 | 60 | 132 | 6.3 | 160 | 7.9 | 200 | 11.2 | 282 | 18.6 | 470 | 21.8 | 555 | 3.4 | 85 | 8.7/11.1/13.9 | 222/283/352 | 56.2 | 1430 | 2.8 | 71 |
| CP85080 | 8941085080 | 176,000 | 80 | 103 | 227 | 9.1 | 230 | 10.0 | 254 | 13.5 | 340 | 16.4 | 415 | 20.4 | 520 | 4.2 | 105 | 13.4/17.4 | 341/443 | 63.3 | 1610 | 3.2 | 82 |
| CP85100 | 8941085100 | 220,000 | 100 | 105 | 232 | 8.5 | 215 | 10.8 | 209 | 13.5 | 341 | 28.6 | 723 | 33.7 | 860 | 5.5 | 137 | 12.3/15.8/19.3 | 313/403/490 | 62.9 | 1600 | 2.8 | 70 |

Workshop Presses






CP86 SERIES

HIGH **DURABILITY WORKSHOP PRESSES**

Durable, robust workshop press range dedicated to maintenance operations





FEATURES AND BENEFITS

- 2 steps stroke system: one for quick approach and a high precision small stroke for fine load tuning
- Durable, robust steel frame
- 2 holes in each foot to fix to the floor ensuring improved stability
- 2 dismountable steel rods to adjust the bench, with a dedicated winch to allow operators to work alone
- Delivered with 2 V blocksLarge gauge measuring short and metric tons
- For North American Markets: supplied with metal protective net

| MODEL | PART NUMBER | | RESSION ORCE | WF | IGHT | | | | | | | | | DIMEN | ISIONS | | | | | | | | |
|---------|-------------|------|-----------------|-----|-------|-----|------|-----|-----|-----|------|------|-----|-------|--------|-----|-----|------|------|------|-----|------|-----|
| MODEL | TART NOMBER | | THOL | | 10111 | | A | В | | | С | E | | | F | F | 1 | F2 | | R | | М | |
| | | tons | | | lb | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm |
| CP86100 | 8941086100 | 100 | 220,000 | 766 | 1689 | 47 | 1200 | 35 | 900 | 72 | 1830 | 30.9 | 787 | 11.7 | 300 | 4.5 | 114 | 32.1 | 814 | 11.9 | 300 | 9.2 | 235 |
| CP86150 | 8941086150 | 15 | 33,000 | 76 | 166 | 28 | 700 | 21 | 540 | 35 | 882 | 19.7 | 500 | 4.7 | 120 | 6.2 | 157 | 18 | 457 | 6.3 | 160 | - | - |
| CP86200 | 8941086200 | 20 | 44,000 | 105 | 232 | 29 | 740 | 28 | 700 | 70 | 1772 | 20.1 | 510 | 5.2 | 132 | 7.3 | 185 | 46.3 | 1175 | 7.3 | 186 | - | - |
| CP86300 | 8941086300 | 30 | 66,100 | 167 | 368 | 31 | 795 | 28 | 700 | 70 | 1772 | 21.1 | 535 | 5.5 | 140 | 5.9 | 151 | 40.6 | 1031 | 6.3 | 160 | 7.9 | 200 |
| CP86500 | 8941086500 | 50 | 110,000 | 298 | 657 | 41 | 1030 | 32 | 800 | 72 | 1830 | 28.7 | 730 | 8.1 | 207 | 2.7 | 68 | 41.3 | 1048 | 7.9 | 200 | 9.6 | 245 |
| CP86750 | 8941086750 | 75 | 165,000 | 498 | 1098 | 45 | 1140 | 32 | 800 | 72 | 1840 | 31.5 | 800 | 9.6 | 245 | 6.8 | 170 | 34.8 | 884 | 9.9 | 250 | 10.2 | 260 |

Workshop Presses

15 ton







CP86150

30 ton







CP86300

FEATURES AND BENEFITS

- 2 steps stroke system: one for quick approach and a high precision small stroke for fine load tuning
- Durable, robust steel frame
- 2 holes in each foot to fix to the floor ensuring improved stability
- 2 dismountable steel rods to adjust the bench, with a dedicated winch to allow operators to work alone

100 ton







CP86100

FEATURES AND BENEFITS

- The Air foot driven pump enables fast, easy performance
- 2 steps stroke system: one for quick approach and a high precision small stroke for fine load tuning
- Durable, robust steel frame
- 2 holes in each foot to fix in the floor guarantee higher stability
- 2 dismountable steel rods adjustable to the bench and a dedicated winch to allow operators to work alone

CP86151

Same features as CP86150, marketed for the North American markets, supplied with metal protective net

CP86301

Same features as CP86300, marketed for the North American markets, supplied with metal protective net

CP86101

Same features as CP86100, marketed for the North American markets, supplied with metal protective net

| MODEL | PART NUMBER | | RESSION | WE | IGHT | | | | | | | | | DIMEN | ISIONS | | | | | | | | |
|----------|-------------------|------|---------|-----|------|-----|------|-----|-----|-----|------|------|-----|-------|--------|-----|-----|------|------|------|-----|-----|-----|
| 0522 | 7,111,110,1152,11 | | 51102 | | | | A | | В | | С | | E | | F | F | 1 | F | 2 | F | 2 | - | М |
| | | tons | lb | kg | lb | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm |
| CP86101* | 8941086101 | 100 | 220,000 | 766 | 1689 | 47 | 1200 | 35 | 900 | 72 | 1830 | 30.9 | 787 | 11.7 | 300 | 4.5 | 114 | 32.1 | 814 | 11.9 | 300 | 9.2 | 235 |
| CP86151* | 8941086151 | 15 | 33,000 | 76 | 166 | 28 | 700 | 21 | 540 | 35 | 882 | 19.7 | 500 | 4.7 | 120 | 6.2 | 157 | 18 | 457 | 6.3 | 160 | - | - |
| CP86201* | 8941086201 | 20 | 44,000 | 105 | 232 | 29 | 740 | 28 | 700 | 70 | 1772 | 20.1 | 510 | 5.2 | 132 | 7.3 | 185 | 46.3 | 1175 | 7.3 | 186 | - | - |
| CP86301* | 8941086301 | 30 | 66,100 | 167 | 368 | 31 | 795 | 28 | 700 | 70 | 1772 | 21.1 | 535 | 5.5 | 140 | 5.9 | 151 | 40.6 | 1031 | 6.3 | 160 | 7.9 | 200 |
| CP86501* | 8941086501 | 50 | 110,000 | 298 | 657 | 41 | 1030 | 32 | 800 | 72 | 1830 | 28.7 | 730 | 8.1 | 207 | 2.7 | 68 | 41.3 | 1048 | 7.9 | 200 | 9.6 | 245 |
| CP86751* | 8941086751 | 75 | 165,000 | 766 | 1689 | 47 | 1200 | 35 | 900 | 72 | 1830 | 30.9 | 787 | 11.7 | 300 | 4.5 | 114 | 32.1 | 814 | 11.9 | 300 | 9.2 | 235 |

^{*} only for NA market.

Crane



CP83100

FAST OPERATION & SAFE WORKSHOP CRANE FOR DAILY APPLICATIONS

For operators looking for a fast and safe workshop crane, CP83100 is the best in choice for general mechanic applications on Light vehicles & Medium Duty Trucks.




Not marketed in the USA & Canada




FEATURES AND BENEFITS

- Fast Operation: 2x quicker than competition because of double pump system
- Safety: Feet locking system for folded and working positions & Dead man release valve
- High Access UP to 53.1 in / 1350 mm @ 500 Kg / 1100 lbs.
- Access to Low Clearance Cars:
 Low profile wheels and arms high: 3.54 in 90 mm
- Easy to Use by only one Operator because of a swivel pump handle position and a release valve at the bottom of the cylinder








| MODEL PART NUMBER CAPACITY WEIGHT | | | | | | | | | | | | | | | | | | |
|-----------------------------------|------------|-------|-------|-------|------|-----|------|------|------|------|-----|-----|-----|-----|-----|--------|--------|--------|
| | | | | | | | Α | E | G | J | K | L | М | Р | S | R MIN. | R MED. | R MAX. |
| | | P1/kg | P1/kg | P1/kg | kg | lb | mm | mm | mm | mm | mm. | mm | mm. | mm | mm | mm | mm | mm |
| CP83100 | 8941083100 | 1000 | 750 | 500 | 98.5 | 217 | 1560 | 2120 | 2240 | 1525 | 790 | 981 | 90 | 480 | 460 | 1100 | 1225 | 1350 |

Wheel Dollies





CP84010

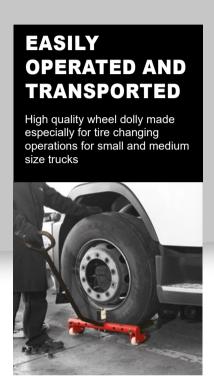

Not marketed in the USA & Canada



FEATURES AND BENEFITS

- Adjustable arms for various wheel sizes enable convenient assembly for different type of vehicles
- Equipped with rollers for easy positioning of wheels onto vehicle stud bolts or holes in brake disks

| MODEL | PART NUMBER | CAP | ACITY | | FORK | WE | IGHT | LENGTH | | TH MIN. HEIGHT | | MAX HEIGHT | |
|---------|-------------|-----------|-------|-----------|--------------|------------|------|-----------|-----------|----------------|-------------|------------|-------------|
| CP84010 | 8941084010 | kg 250 | 550 | mm 305 | in. 12.01 | kg 31.5 | 14.3 | mm 330 | in. 13 | mm. 970 | in. 38.2 | mm 1005 | in. 39.6 |

Jump starters



CP90 SERIES

FAST CHARGING AND EASE OF USE The Chicago Air batteryless jump starters provide convenience and ease to use to professionals who are looking for solutions to jump start a flat battery from light to heavy vehicles.

Not marketed in the USA & Canada



FEATURES AND BENEFITS

- 30 seconds on running engine are needed to recharge the battery and restart vehicles
- Ultracapacitor technology: Batteryless jump starter lasts for at least 1 million cycles for a 5-year warranty
- Equipped with a buzzer to prevent polarity inversion and a fuse to protect the vehicle and booster in case of improper use
- Lighter than standard jump starters and comes with a large, telescopic handle and 2 large wheels for easy transportation
- Jump starts are equipped with full electrical insulation for full protection from electric arcs during set-up

| MODEL | PART NUMBER | CAPACITY | SHORT CIRCUIT COURANT | POLARITY INVERSION ALARM | PROTECTION FUSE | CHAR | RGE ON | | BLE IGTH | | BLE | WE | GHT | LEN | GTH |
|---------|-------------|------------------------|-----------------------------|--------------------------------|--------------------|----------|----------|-----|-------------|----|-----|-----|------|-----|------|
| | | Farad | AP | А | ft.lb | Sector | Engine | m | ft | m | ft | kg | lb | mm | in. |
| CP90250 | 8941090250 | 250 | 800 | V | V | ~ | V | 1.1 | 3.6 | 50 | 0.1 | 8.8 | 19.4 | 370 | 14.6 |
| CP90500 | 8941090500 | 500 | 9000 | V | V | V | V | 1.1 | 3.6 | 50 | 0.1 | 9.7 | 21.4 | 370 | 370 |
| CP90600 | 8941090600 | 1360 (12V) - 340 (24V) | 4000 (12V) - 2000 (24V) | V | V | V | ~ | 1.9 | 6.2 | 50 | 0.1 | - | - | - | - |



Accessories Workshop Equipement

PRESSES



PROTECTION CAGE

| | FOR MODEL | DESCRIPTION | PART NUMBER |
|---------|-----------|---------------------|-------------|
| CP86100 | | Protection Net 100T | 8940173459 |
| CP86750 | | Protection Net 75T | 8940173458 |
| CP86151 | | Protection Net 15T | 8940173207 |
| CP86201 | | Protection Net 20T | 8940173208 |
| CP86301 | | Protection Net 30T | 8940173209 |
| CP86501 | | Protection Net 50T | 8940173210 |



| PART NUMBER | DESCRIPTION |
|-------------|---------------------------|
| 8955000039 | PRESS PUNCH QUICK CHUCK |
| 8955000040 | FRAME BODY |
| 8955000041 | D18 PUNCH 18MM DIAMETER |
| 8955000042 | D16 PUNCH 16MM DIAMETER |
| 8955000043 | D20 PUNCH 20MM DIAMETER |
| 8955000044 | D22 PUNCH 22MM DIAMETER |
| 8955000045 | D25 PUNCH 25MM DIAMETER |
| 8955000046 | D30 PUNCH 30MM DIAMETER |
| 8955000047 | D12 PUNCH 12MM DIAMETER |
| 8955000048 | D10 PUNCH 10MM DIAMETER |
| 8955000049 | PUNCH PLATE |
| 8955000050 | DS-8 SET OF PRESS PUNCHES |

AIR HYDRAULIC JACKS



ADAPTOR

| | DIME | | |
|-------------------|------|-------------|------------|
| FOR MODEL | HEI | PART NUMBER | |
| | mm | in. | |
| CD05030 8 CD05050 | 1,77 | 45 | 8940174093 |
| CP85030 & CP85050 | 2,95 | 75 | 8940174105 |
| CD05000 8 CD05400 | 1,77 | 45 | 8940174271 |
| CP85080 & CP85100 | 2.95 | 75 | 8940174272 |



| FOR MODEL | DESCRIPTION | PART NUMBER |
|-----------|----------------------|-------------|
| CP85031 | CA001 Adoptor Type A | 8940176085 |
| CP85030 | SA001 Adaptor Type A | 0340170005 |

| Notes | |
|-------|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

AIR LINE NETWORK



CP Air Preparation Units

Designed for maximum tool performance







OTHER ACCESSORIES

BALANCERS

OILERS












CP

Offers a wider range of couplings to create the best possible solution together with Power Tools.

CP Air Preparation Units are designed to help you get maximum performance from your tools. They ensure minimal pressure drop and thus minimum energy losses in the air distribution system, benefiting the environment and cutting your operating costs.

The lifetime of your tools will be extended by using air preparation units and with that comes lower repair costs and less downtime. A correct air installation guarantees productivity and good total economy.

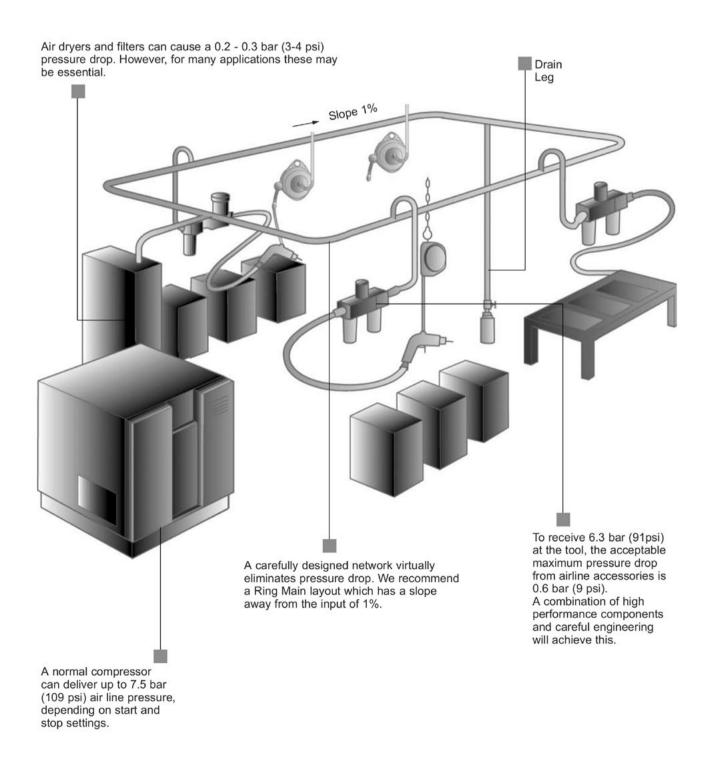

FILTERS, REGULATORS, LUBRICATORS

Why should you use a filter, regulator and lubricator?

The use of a filter, regulator and lubricator (in that order) for pretool air preparation is strongly recommended by CP. Proper air preparation will result in improved tool performance and increased tool life. The units should be mounted as close to the tool as possible, preferably right where the tool hose is connected to the system. To realize their full value, these units should be checked on a regular assigned basis by maintenance workers or the operators themselves.

AIR FILTER

Filter separates impurities such as water and solid particles.


Not using filters in combination with air tools leads to shorter service life, higher maintenance costs and lower efficiency. Old air systems with cool dryers, for instance, generate a lot of rust and running tools without installing a filter could damage the tool in less than a week.

CP filters separate up to 98% of the water when operating within their working range.

REGULATOR

The regulator ensures that the pre-set working pressure remains constant - regardless of pressure variations in the intake air and minor variations in the airflow rate. For example, a pressure of 1 bar higher than necessary results in a 16% increase in air consumption.

| TOOL PRESSURE | AIR CONSUMPTION |
|-----------------|-----------------|
| 91 psi (6 bar) | 100 % |
| 101 psi (7 bar) | 110 % |
| 116 psi (8 bar) | 125 % |

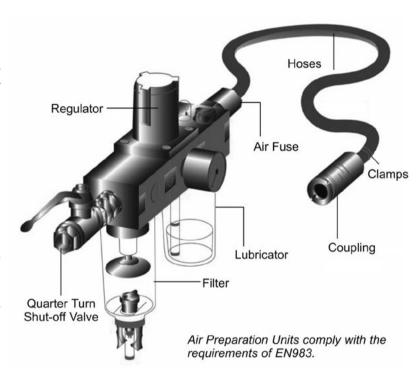

Spring controlled regulators are quick acting and therefore should be used for all types of air tools.

LUBRICATORS

If lubricators are not used, tool motor vanes will need to be changed more often. The life of the vanes may decrease to as little as 1/10th of the normal working time. The oil fog lubricator is the most common type of lubricator. It supplies a mist of oil to the air hose.

- CP FRL Filters, Regulators and Lubricators units enable your tools to run at optimal performance, hence reducing downtime and increasing productivity.
- Simple to install on the air line with connection thread from ½" to 1", the solution can be adapted to customer's needs by choosing the proper modules, Regulator, lubricator, filter or filterregulator. The automatic oil refilling system help to simplify the maintenance of the installation.
- Using CP FRL is a first step in the reduction of CO2 emission. The diaphragm type pressure valve limit pressure drop even with a high air flow.





| FILTER-REGULATOR LUBRICATOR WITH PRESSURE GAUGE | THREAD | READ MAX. AIR FLOW | | MAX. PRESSURE | | OIL CAPACITY | | FILTER | PART NUMBER | |
|---|--------|-----------------------|-----|------------------|-----|-----------------|-----|----------|-------------|-------------|
| (0-150PSI - 0-10 BAR) | in. | cfm | l/s | psi | bar | oz | ml | | BSP | NPT |
| COMPOSITE FRL 2 STAGES, SEMI AUTOMATIC DRAIN, AUTOMATIC OIL FIL-IN | 1/2" | 125 | 59 | 232 | 16 | 2.7 | 80 | 5 micron | 6158135640 | coming soon |
| COMPOSITE FRL 2 STAGES, AUTOMATIC DRAIN, AUTOMATIC OIL FIL-IN | 3/4" | 284 | 134 | 232 | 16 | 6 | 180 | 5 micron | 6158135650 | coming soon |
| COMPOSITE FRL 2 STAGES, AUTOMATIC DRAIN, AUTOMATIC OIL FIL-IN | 1" | 284 | 134 | 232 | 16 | 6 | 180 | 5 micron | 6158135660 | coming soon |



| FILTER UNIT | THREAD | PART N | UMBER |
|------------------------------|--------|------------|----------------|
| | in. | BSP | NPT |
| FILTER-REGULATOR 1/2" BSP | 1/2" | 6154501115 | coming soon |
| FILTER-REGULATOR 1" BSP | 1" | 6154501155 | coming soon |



| LUBRICATOR UNIT | THREAD | THREAD PART NU | | | | |
|---------------------|--------|----------------|----------------|--|--|--|
| | in. | BSP | NPT | | | |
| LUBRICATOR 1/2" BSP | 1/2" | 6154501135 | coming soon | | | |
| LUBRICATOR 1" BSP | 1" | 6154501175 | coming soon | | | |



| REGULATOR UNIT | THREAD | PART NUMBER | | |
|--------------------|--------|-------------|-------------|--|
| | in. | BSP | NPT | |
| REGULATOR 1/2" BSP | 1/2" | 6154501125 | coming soon | |
| REGULATOR 1" BSP | 1" | 6154501165 | coming soon | |



| FILTER-REGULATOR | THREAD | PART N | UMBER | |
|------------------------------|--------|------------|----------------|--|
| | in. | BSP | NPT | |
| FILTER-REGULATOR 1/2" BSP | 1/2" | 6154501105 | coming soon | |
| FILTER-REGULATOR 3/4" BSP | 3/4" | 6154502495 | coming soon | |
| FILTER-REGULATOR 1" BSP | 1" | 6154501145 | coming soon | |

ACCESSOIRES FRL



| ITEM | ACCESSORY'S DESCRIPTION | MAINTENANCE KIT |
|------|--|-----------------|
| 1 | Pressure Gauge | 6154500925 |
| 2 | Coupling kit for 1/2" FRL (to connect modules of FRL to each other) | 6154500945 |
| 2 | Coupling kit for 3/4" & 1" FRL (to connect modules of FRL to each other) | 6154500955 |
| 3 | Wall Coupling kit (set of 2) for 1/2" FRL (to fix FRL to stand or other support) | 6154500965 |
| 3 | Wall Coupling kit (set of 2) for 3/4" FRL (to fix FRL to stand or other support) | 6154500975 |
| 3 | Wall Coupling Kit (set of 2) for 1" FRL (to fix FRL to stand or other support) | 6154501005 |
| 4 | Bracket kit for 1/2" FRL | 6154500985 |
| 5 | Automatic drain | 6154500935 |
| 6 | FRL stand | 6158136030 |

ADAPTORS



| PART NUMBER | THREAD | | | | | |
|--------------|------------|----------|--|--|--|--|
| | FEMALE NPT | MALE BSP | | | | |
| 61103 | 1/8" | 1/8" | | | | |
| 181523 | 1/4" | 1/4" | | | | |
| | 1/2" | 1/2" | | | | |
| 615 813 6510 | 3/4" | 3/4" | | | | |
| 615 813 5720 | 1" | 1" | | | | |

| THR | EAD | PART NUMBER |
|----------|------------|--------------|
| MALE BSP | FEMALE NPT | |
| 1/2" | 1/2" | 615 813 6170 |
| 3/4" | 3/4" | |
| 1" | 1" | 615 813 6190 |

THE FLEXIBILITY OF AIR FLEX







THE NEW CP AIR FLEX MAKES ALL RIGID HOSES FLEXIBLE AND MULTI-DIRECTIONAL.

Easy: less effort due to hose rigidity, makes work easier in hard to reach areas.

Less wear: no more premature hose wear.

Ergonomic and safety: no twisting, the hose remains in the ideal working position and lower the risk of tendinitis.

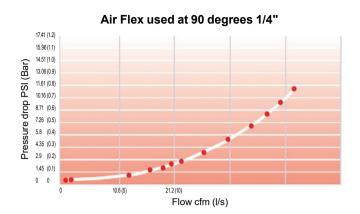

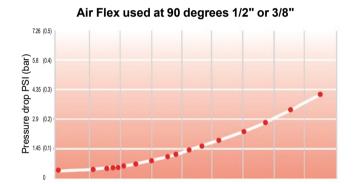

ACCESSOIRES FRL

| MODEL | PART NUMBER | MAX RECOMMENDED AIR FLOW | | FEMALE INLET | MALE INLET | WEIGHT | | LENGTH | | OUTSIDE DIAMETER | |
|-------------------|-------------|-----------------------------|-----|-----------------|---------------|--------|-------|--------|-----|------------------|------|
| | | cfm | I/s | in. | in. | lb | g | in. | mm | in. | mm |
| BSP | | | | | | | | | | | |
| AIR-FLEX 1/4" BSP | 8940171568 | 25.2 | 12 | 1/4" | 1/4" | 0,17 | 0.079 | 2-2/3" | 67 | 15/16" | 24 |
| AIR-FLEX 3/8" BSP | 8940171570 | 63.6 | 30 | 3/8" | 3/8" | 0,28 | 0.126 | 3-1/4" | 82 | 1-1/16" | 29.5 |
| AIR-FLEX 1/2" BSP | 8940171566 | 63.6 | 30 | 1/2" | 1/2" | 0,29 | 0.132 | 3-1/4" | 82 | 1-1/16" | 29.5 |
| NPT | | | | | | | | | | | |
| AIR-FLEX 1/4" NPT | 8940171569 | 29.7 | 14 | 1/4" | 1/4" | 0,17 | 0.079 | 2-2/3" | 67 | 15/16" | 24 |
| AIR-FLEX 3/8" NPT | 8940171571 | 74 | 35 | 3/8" | 3/8" | 0,28 | 0.126 | 3-1/4" | 82 | 1-1/16" | 29.5 |
| AIR-FLEX 1/2" NPT | 8940171567 | 63.6 | 30 | 1/2" | 1/2" | 0,29 | 0.132 | 3-1/4" | 82 | 1-1/16" | 29.5 |
| AIR-FLEX 1/2" NPT | 8940175305 | 110 | 52 | 1/2" | 1/2" | 0,73 | 0.330 | 3-1/4" | 114 | 1-1/16" | 39 |

*Not recommended for percussive tools

ERGONOMIC FEATURES FOR AN OPTIMAL COMFORT





FOR OPEN HOSE REEL TYPES SEE BELOW CHART

RATCHET **SPRING**

Provides easy locking and retracting of hose

SWIVEL-PLATE BRACKET

Allows 180° movement for easier hose handling

MULTI DIRECTIONAL SWIVEL-INLET

Easy connection fixed pipes

MOVABLE RETAINING BALL

Allows easy adjustment of leader hose to desired length

APPLICATIONS




INDUSTRIAL MAINTENANCE AND PRODUCTION



OFF-ROAD MAINTENANCE APPLICATIONS

CP HOSE REEL SELECTION CRITERIA

First Consider the application and pressure requirements. NOTE: All our hose reel work at max working pressure 217psi (15bar)



Then select length of the hose reel and material of hose depending on the work environment.

IMPROVED DURABILITY



QUALITY & SAFETY **TESTED**

The most durable hose reel range ever offered bv CP



RUBBER PROTECTION

Avoids any stress on the crimping



NEW CRIMPING SYSTEM

Maximum quality for maximum robustness



RATCHET SPRING

Outside access for quick and low cost maintenance



HIGHLY-INCREASED PARTS QUALITY

Long-lasting parts Fully repairable



DRUM SPRING

Up to 25000 cycles Superior durability

CP HOSE REELS RANGE COMPLETE

HOSE Ø: 5/16" (8 MM)

Working Pressure 217psi / 15bar - Working Temperature - 14°F+140°F /-10°C+60°C

| MODEL | PART NUMBER | HOSE Ø INSIDE | HOSE Ø OUTSIDE | HOSE LENGTH | HOSE MATERIAL | INCOMING FITTING | END HOSE FITTING | HOSE REEL MATERIAL | FLUID TYPE | HOSE REEL TYPE |
|-----------|--------------|------------------|-------------------|-------------|------------------|-------------------|---------------------|--------------------|------------|-------------------|
| NPT HR810 | 8940171990 | 5/16" (8 mm) | 1/2" (12mm) | 33ft (10m) | PU | 1/4" F SWIVELLING | 1/4" M FIX | PLASTIC | AIR | CLOSED |
| BSP HR810 | 8 8940171991 | 5/16" (8 mm) | 1/2" (12mm) | 33ft (10m) | PU | 1/4" F SWIVELLING | 1/4" M FIX | PLASTIC | AIR | CLOSED |
| NPT HR820 | 8940171994 | 5/16" (8 mm) | 1/2" (12mm) | 33ft (10m) | KPU | 1/4" F SWIVELLING | 1/4" M FIX | ALUMINIUM | AIR/WATER | CLOSED |
| BSP HR820 | 8940171995 | 5/16" (8 mm) | 1/2" (12mm) | 33ft (10m) | KPU | 1/4" F SWIVELLING | 1/4" M FIX | ALUMINIUM | AIR/WATER | CLOSED |

HOSE Ø: 3/8" (10 MM)

Working Pressure 217psi / 15bar - Working Temperature - 14°F+140°F /-10°C+60°C

| MODEL | PART NUMBER | HOSE Ø INSIDE | HOSE Ø OUTSIDE | HOSE LENGTH | HOSE MATERIAL | INCOMING FITTING | END HOSE FITTING | HOSE REEL MATERIAL | FLUID TYPE | HOSE REEL TYPE |
|------------|-------------|------------------|-------------------|--------------|------------------|-------------------|---------------------|------------------------------|------------|-------------------|
| NPT HR8110 | 8940171992 | 3/8" (10mm) | 9/16" (14mm) | 52.5ft (16m) | PU | 3/8" F SWIVELLING | 3/8" M FIX | PLASTIC | AIR | CLOSED |
| BSP HR8110 | 8940171993 | 3/8" (10mm) | 9/16" (14mm) | 52.5ft (16m) | KPU | 3/8" F SWIVELLING | 3/8" M FIX | PLASTIC | AIR | CLOSED |
| NPT HR8210 | 8940171996 | 3/8" (10mm) | 9/16" (14mm) | 52.5ft (16m) | KPU | 3/8" F SWIVELLING | 3/8" M FIX | ALUMINIUM | AIR/WATER | CLOSED |
| BSP HR8210 | 8940171997 | 3/8" (10mm) | 9/16" (14mm) | 52.5ft (16m) | KPU | 3/8" F SWIVELLING | 3/8" M FIX | ALUMINIUM | AIR/WATER | CLOSED |
| NPT HR9110 | 8940172000 | 3/8" (10mm) | 9/16" (14mm) | 65.6ft (20m) | KPU | 1/2" F 90° TURN | 3/8" M FIX | STEEL STRUCTURE PLASTIC DRUM | AIR/WATER | OPEN |
| BSP HR9110 | 8940172001 | 3/8" (10mm) | 9/16" (14mm) | 65.6ft (20m) | KPU | 1/2" F 90° TURN | 3/8" M FIX | STEEL STRUCTURE PLASTIC DRUM | AIR/WATER | OPEN |

HOSE Ø: 1/2" (13 MM)

| Working Fressure | Volking Pressure 217 psi/ Tobal - Working Temperature - 14 1 1140 1 /-10 C100 C | | | | | | | | | | | | |
|------------------|---|------------------|-------------------|--------------|------------------|-------------------|---------------------|------------------------------|------------|-------------------|--|--|--|
| MODEL | PART NUMBER | HOSE Ø INSIDE | HOSE Ø OUTSIDE | HOSE LENGTH | HOSE MATERIAL | INCOMING FITTING | END HOSE FITTING | HOSE REEL MATERIAL | FLUID TYPE | HOSE REEL TYPE | | | |
| NPT HR8113 | 8940171998 | 1/2" (13mm) | 11/16" (17mm) | 52.5ft (16m) | KPU | 1/2" F SWIVELLING | 1/2" M FIX | PLASTIC | AIR | CLOSED | | | |
| BSP HR8113 | 8940171999 | 1/2" (13mm) | 11/16" (17mm) | 52.5ft (16m) | KPU | 1/2" F SWIVELLING | 1/2" M FIX | PLASTIC | AIR | CLOSED | | | |
| NPT HR9113 | 8940172002 | 1/2" (13mm) | 11/16" (17mm) | 49ft (15m) | KPU | 1/2" F 90° TURN | 1/2" M FIX | STEEL STRUCTURE PLASTIC DRUM | AIR/WATER | OPEN | | | |
| BSP HR9113 | 8940172003 | 1/2" (13mm) | 11/16" (17mm) | 49ft (15m) | KPU | 1/2" F 90° TURN | 1/2" M FIX | STEEL STRUCTURE PLASTIC DRUM | AIR/WATER | OPEN | | | |
| BSP HR 9213 | 8940173324 | 1/2" (13mm) | 13/16" (20.5mm) | 49ft (15m) | RUBBER | 1/2" F 90° TURN | 1/2" M FIX | STEEL STRUCTURE PLASTIC DRUM | AIR/WATER | OPEN | | | |
| NPT HR9213 | 8940173325 | 1/2" (13mm) | 13/16" (20.5mm) | 49ft (15m) | RUBBER | 1/2" F 90° TURN | 1/2" M FIX | STEEL STRUCTURE PLASTIC DRUM | AIR/WATER | OPEN | | | |

EFFIMAXHOSES

CP offers the highest quality Effi Max Series hoses with special features as low weight and flexibility to meet ergonomic demands.

Aimed to generic grinding applications

- Exteme low weight
- Antistatic
- Rubber hose
- Soft and flexible
- Welding spatter resistant



| | ISIONS (OD) | LEN | GTH | MAX WORKING PRESSURE | AIR FLOW | | AIR FLOW WEIGHT PER 65.6 FT /20M | | PART NUMBER |
|--------|----------------|------|-----|-------------------------|----------|-----|----------------------------------|-----|----------------|
| in. ID | mm | ft | m | PSI (bar) | cfm | I/s | lb | kg | HOMBER |
| 3/8 | 9.5x12.5 | 65.6 | 20 | 232 (16) | 27.6 | 13 | 6.4 | 2.9 | 8940169921 |
| 1/2 | 13x18.6 | 65,6 | 20 | 232 (16) | 44.5 | 21 | 8.6 | 3.9 | 6158109000 |
| 5/8 | 16x22.5 | 65,6 | 20 | 232 (16) | 91.1 | 43 | 10.6 | 4.8 | 6158109010 |
| 3/4 | 20x26.1 | 65,6 | 20 | 232 (16) | 159 | 75 | 11.9 | 5.4 | 6158109020 |

Standard quality hose in PUR and Rubber will provide the best quality product for the price for optimized work with pneumatic tools.

EFFI MAX WHIPS



Always use a hose whip between the tool and the air supply hose. It provides safety and longer tool air inlet life.

| HOSE DIAM. | | THREAD SIZE | HOSEL | ENGHT | PART N | UMBER |
|------------|----|----------------|-------|-------|--------------|------------|
| in. | mm | in. | ft | m | NPT | BSP |
| 3/8 | 10 | 1/4 | 2.0 | 0.6 | CA047270 | 6158111920 |
| 1/2 | 13 | 3/8 | 2.0 | 0.6 | CA049271 | 6158112640 |
| 1/2 | 13 | 1/2 | 2.0 | 0.6 | CA049270 | 6158111930 |
| 5/8 | 16 | 1/2 | 2.0 | 0.6 | 615 811 2660 | 6158112650 |

EFFI MAX HOSE KITS



Hose kits are equipped with end thread fittings and fittings and available in short length, ready to connect and use.


| HOSE | DIAM. | THREAD SIZE | HOSEL | ENGHT | PART NUMBER |
|------|-------|----------------|-------|-------|-------------|
| in. | mm | in. | ft | m | BSP |
| 1/2 | 12,5 | 3/8" Male | 9,84 | 3 | 8940176677 |
| 5/8 | 16 | 1/2" Male | 6,56 | 2 | 8940176678 |
| 3/8 | 10 | 1/4" Male | 6,56 | 2 | 8940176679 |

POLYURETHANE SPIRAL HOSE

Spiral hose are especially adapted for tools used at varying distances. Vertically or horizontally, together with a balancer spiral hose, it is a step forward in ergonomics. Equipped with ball bearing at one end (except the 11x16), they can be directly connected at the tool outlet, avoiding the hose to twist.

- Self retractable
- Light and flexible
- Strong and durable





| DIMENS | SIONS (Ø) | THREAD SIZE | HOSEL | ENGHT | | LENGTH | | PART N | JMBER |
|--------|-----------|----------------|-------|-------|------------|------------|------------|------------|------------|
| in. | mm | in. | ft | m | A in. (mm) | B in. (mm) | C in. (mm) | BSP | NPT |
| 1/4" | 6,5x10 | 1/4" | 6.6 | 2 | 19,7 (500) | 5,5 (140) | 5,9 (150) | | 6158109670 |
| 1/4" | 6,5x10 | 1/4" | 13,12 | 4 | 19,7 (500) | 13 (330) | 5,9 (150) | 6158046360 | 6158109680 |
| 1/4" | 6,5x10 | 1/4" | 19,68 | 6 | 19,7 (500) | 20,1 (510) | 5,9 (150) | 6158046370 | 6158109690 |
| 1/4" | 6,5x10 | 1/4" | 26,24 | 8 | 19,7 (500) | 27,6 (700) | 5,9 (150) | 6158046380 | 6158109700 |
| 5/16" | 8x12 | 3/8" | 6,56 | 2 | 19,7 (500) | 5,1 (130) | 5,9 (150) | 6158046390 | 6158109710 |
| 5/16" | 8x12 | 3/8" | 13,12 | 4 | 19,7 (500) | 11,8 (300) | 5,9 (150) | 6158046400 | 6158109720 |
| 5/16" | 8x12 | 3/8" | 19,68 | 6 | 19,7 (500) | 18,1 (460) | 5,9 (150) | 6158046410 | 6158109730 |
| 5/16" | 8x12 | 3/8" | 26,24 | 8 | 19,7 (500) | 24,8 (630) | 5,9 (150) | 6158046420 | 6158109740 |
| 7/16" | 11x16 | 3/8" | 6.6 | 2 | 19,7 (500) | 4,7 (120) | 5,9 (150) | | 6158109750 |
| 7/16" | 11x17 | 3/8" | 13.1 | 4 | 19,7 (500) | 10,6 (270) | 5,9 (150) | | 6158109770 |
| 7/16" | 11x18 | 3/8" | 19.7 | 6 | 19,7 (500) | 16,5 (420) | 5,9 (150) | | 6158109780 |

CP's Easy Flow coupling is designed to eliminate air restriction which minimize the pressure drop. Thanks to its innovative design, EF is suited for rough environment and is easy and secure to connect and disconnect with a push and bend principle. The safety feature in EF couplings are vented version to minimize the risk of sudden separation of coupling and nipple.

CP offers a wider range of couplings to create the best possible solution together with Power Tools. The range consists of four types of couplings with different characteristic, all with the focus on quality, ergonomics and performance. To cover most of the global needs CP offers three types of nipple profiles, Euro-, ISO 6150B- and the Asian profile. With the Easy Flow coupling CP can present a unique coupling with no air restriction, minimizing the pressure drop.

Thanks to its innovative design EF is suited for rough environment and it is easy and secure to connect and disconnect with the push and bend principle. The safety feature in EF and Safety Couplings are vented versions to minimize the risk of sudden separation of coupling and nipple.

| | AIR FLOW | SAFETY FEATURE | ROUGH ENVIRONEMENT | DURABILITY | ERGONOMICS |
|---------------|----------|-------------------|-----------------------|------------|------------|
| EF | +++ | ++ | ++ | ++ | +++ |
| Quick Release | ++ | | + | + | +++ |
| Claw | +++ | | +++ | +++ | |

Max air flow capacity (Delta 7.2 psi / 0.5 bar) - Economical air flow (Delta 2.9 psi (0.2 bar)

CP FITTINGS ADAPTABILITY

| NIPPLE | | ISO6105B 6MM | EURO 7,6MM | EURO 10,4MM | ASIA 7,5MM |
|---------|----------------------------|-----------------|---------------|----------------|---------------|
| | 310 | х | | | |
| CEJN | 320 | | х | | |
| | 410 | | | x | |
| | 1300 | х | | | |
| TEME | 1600 | | x | | |
| | 1700 | | | x | |
| ARO | 23-23902 | x | | | |
| | 14-22 | х | | | |
| RECTUS | 25(KA, KB, KD, KE, KL, KS) | | x | | |
| RECTUS | 26 (KA, KB, KE) | | x | | |
| | 27 | | | x | |
| PREVOST | ARM-ASC-ARC-06 | X | | | |
| FREVOST | ESC 07 | | x | | |
| LEGRIS | 14-22 | x | | | |
| | 25(KA, KB, KD, KE, KL, KS) | | x | | |
| NITTO | Hi CUPLA200 | | | | х |



EFCOUPLING-EUROSERIES: EUROPE

EF COUPLING - EURO 7.6mm / Max air flow capacity 79 cfm / 37.5 l/s (Delta 7.2 psi / 0.5 bar) Economical air flow 53 cfm - 25 l/s (Delta 2.9 psi / 0.2 bar)



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER |
|-------------------|----------------|-------------|
| 1/4 | BSP | 6158105170 |
| 3/8 | BSP | 6158105180 |
| 1/2 | BSP | 6158105190 |



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-------------------|-------------|-------------|---------------|
| 1/4" | BSP | 6158105910 | 6158134270 |
| 3/8" | BSP | 6158105920 | 6158134280 |
| 1/2" | BSP | 6158105930 | 6158134290 |







| MALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-----------------|-------------|-------------|---------------|
| 1/4" | BSP | 6158105880 | 6158134240 |
| 3/8" | BSP | 6158105890 | 6158134250 |
| 1/2" | BSP | 6158105900 | 6158134260 |



| HOSE CONNECTION mm | PART NUMBER |
|--------------------|-------------|
| 6 | 6158105500 |
| 8 | 6158105530 |
| 10 | 6158105540 |
| 13 | 6158105550 |



| HOSE CONNECTOR | PART NUMBER | SET OF 10 PCS |
|----------------|-------------|---------------|
| 06-07 mm | 6158106220 | 6158134200 |
| 08 mm | 6158106250 | 6158134210 |
| 09-10 mm | 6158106260 | 6158134220 |
| 13 mm | 6158106270 | 6158134230 |

EF COUPLING -EURO 10,4mm/Max air flow capacity: 72 l/s / 153 cfm (ΔP 0,5 bars / 2,9 PSI) Economical air flow capacity: 48 l/s / 102 cfm (ΔP 0,2 bars / 2,9 PSI)



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER |
|-------------------|----------------|-------------|
| 3/8" | BSP | 6158106420 |
| 1/2" | BSP | 6158106430 |
| 3/4" | BSP | |



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|----------------|-------------|
| 3/8" | BSP | 6158106390 |
| 1/2" | BSP | 6158106400 |
| 3/4" | BSP | 6158106410 |



| HOSE CONNECTION mm | PART NUMBER |
|--------------------|-------------|
| 10 mm | 6158106510 |
| 13 mm | 6158106520 |
| 16 mm | 6158106530 |









NIPPLES EURO 10,4mm

NIPPLES EURO 7.6mm

| FEMALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-------------------|-------------|-------------|---------------|
| 3/8" | BSP | 6158106710 | 6158134390 |
| 1/2" | BSP | 6158106720 | 6158134400 |
| 3/4" | BSP | 6158106730 | 6158134410 |

| MALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-----------------|-------------|-------------|---------------|
| 3/8" | BSP | 6158106650 | 6158134360 |
| 1/2" | BSP | 6158106660 | 6158134370 |
| 3/4" | BSP | 6158106670 | 6158134380 |
| | | | |

| HOSE CONNECTION mm | PART NUMBER | SET OF 10 PCS |
|--------------------|-------------|---------------|
| 10 mm | 6158106770 | 6158134320 |
| 13 mm | 6158106780 | 6158134330 |
| 16 mm | 6158106790 | 6158134340 |
| 19 mm | 6158106800 | 6158134350 |



EF COUPLINGS -ISO 6105B MIL-C4109: NORTH AMERICA, FRANCE, ITALY

EF COUPLING - ISO 6150B 6mm /Max air flow capacity : 16.7 l/s / 36 cfm (ΔP 0,5 bars / 7,2 PSI)

Economical air flow capacity: 11 l/s / 23.3 cfm (ΔP 0,2 bars / 2,9 PSI)



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER |
|-------------------|----------------|-------------|
| 1/4" | NPT | 6158104880 |
| 3/8" | NPT | 6158104890 |
| 1/4" | BSP | 6158104820 |
| 3/8" | BSP | 6158104830 |



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-------------------|-------------|-------------|---------------|
| 1/4" | NPT | 6158105650 | 6158134510 |
| 3/8" | NPT | 6158105660 | 6158134520 |
| 1/4" | BSP | 6158105590 | 6158134490 |
| 3/8" | BSP | 6158105600 | 6158134500 |

NIPPLES ISO 6150B 6mm



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|----------------|-------------|
| 1/4" | NPT | 6158104850 |
| 3/8" | NPT | 6158104860 |
| 1/2" | NPT | 6158104870 |
| 1/4" | BSP | 6158104790 |
| 3/8" | BSP | 6158104800 |
| 1/2" | BSP | 6158104810 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-----------------|-------------|-------------|---------------|
| 1/4" | NPT | 6158105620 | 6158134470 |
| 3/8" | NPT | 6158105630 | 6158134480 |



| HOSE CONNECTION mm | PART NUMBER |
|--------------------|-------------|
| 06 mm | 6158105300 |
| 08 mm | 6158105310 |
| 10 mm | 6158105320 |
| 13 mm | 6158105330 |



| HOSE CONNECTION mm | PART NUMBER | SET OF 10 PCS |
|--------------------|-------------|---------------|
| 06 mm | 6158106040 | 6158134440 |
| 08 mm | 6158106050 | 6158134450 |
| 10 mm | 6158106060 | 6158134460 |

NIPPLES ISO 6150B 8mm

EF COUPLING - ISO 6150B 8mm/ Max air flow capacity : 43 l/s / 91 cfm (ΔP 0,5 bars / 7,2 PSI)

Economical air flow capacity : 27 l/s / 57 cfm (ΔP 0,2 bars / 2,9 PSI)



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER |
|-------------------|----------------|-------------|
| 1/4" | NPT | |
| 3/8" | NPT | 6158105020 |
| 1/2" | NPT | 6158105030 |
| 1/4" | BSP | 6158104950 |
| 3/8" | BSP | 6158104960 |
| 1/2" | BSP | 6158104970 |



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-------------------|-------------|-------------|---------------|
| 1/4" | NPT | | 6158134740 |
| 3/8" | NPT | 6158105780 | 6158134750 |
| 1/2" | NPT | 6158105790 | 6158134760 |
| 1/4" | BSP | 6158105710 | 6158134720 |
| 3/8" | BSP | 6158105720 | 6158134730 |
| 1/2" | BSP | 6158105730 | 6158134930 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|----------------|-------------|
| 1/4" | NPT | 6158104980 |
| 3/8" | NPT | 6158104990 |
| 1/2" | NPT | 6158105000 |
| 1/4" | BSP | 6158104920 |
| 3/8" | BSP | 6158104930 |
| 1/2" | BSP | 6158104940 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS | |
|-----------------|-------------|-------------|---------------|--|
| 1/4" | NPT | 6158105740 | 6158134690 | |
| 3/8" | NPT | 6158105750 | 6158134700 | |
| 1/2" | NPT | 6158105760 | 6158134710 | |
| 3/8" | BSP | 6158105690 | | |



| HOSE CONNECTION mm | PART NUMBER |
|--------------------|-------------|
| 08mm | 6158105380 |
| 10mm | 6158105390 |
| 16mm | 6158105410 |



| HOSE CONNECTION mm | PART NUMBER | SET OF 10 PCS |
|--------------------|-------------|---------------|
| 08mm | 6158106110 | 6158134650 |
| 10mm | 6158106120 | 6158134660 |
| 13mm | 6158106130 | 6158134670 |

EF COUPLING - ISO 6150B 11mm/Max air flow capacity: 76,5 l/s / 162 cfm (ΔP 0,5 bars / 7,2 PSI)

Economical air flow capacity : 52 l/s / 110 cfm (ΔP 0,2 bars / 2,9 PSI)



| FEMALE THREAD in. | THREAD TYPE | PART NUMBER |
|-------------------|----------------|-------------|
| 3/8" | NPT | 6158105110 |
| 1/2" | NPT | 6158105120 |
| 3/4" | NPT | 6158106370 |
| 3/8" | BSP | 6158105070 |
| 1/2" | BSP | 6158105080 |



NIPPLES ISO 6150B 11mm

| FEMALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS | |
|-------------------|-------------|-------------|---------------|--|
| 3/8" | NPT | 6158105860 | 6158134570 | |
| 1/2" | NPT | 6158105870 | 6158134580 | |
| 3/4" | NPT | 6158106940 | 6158134590 | |



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|----------------|-------------|
| 3/8" | NPT | 6158105090 |
| 1/2" | NPT | 6158105100 |
| 3/4" | NPT | 6158106350 |
| 3/8" | BSP | 6158105050 |
| 1/2" | BSP | 6158105060 |
| 3/4" | BSP | 6158106340 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-----------------|-------------|-------------|---------------|
| 3/8" | NPT | 6158105840 | 6158134600 |
| 1/2" | NPT | 6158105850 | 6158134610 |
| 3/4" | NPT | 6158106920 | 6158134620 |



| HOSE CONNECTION mm | PART NUMBER |
|--------------------|-------------|
| 10mm | 6158105460 |
| 13mm | 6158105470 |
| 16mm | 6158105480 |
| 19mm | 6158105490 |



| HOSE CONNECTION mm | PART NUMBER | SET OF 10 PCS |
|--------------------|-------------|---------------|
| 10mm | 6158106180 | 6158134530 |
| 13mm | 6158106190 | 6158134540 |
| 16mm | 6158106200 | 6158134550 |
| 19mm | 6158106210 | 6158134560 |

EF COUPLING - ASIA 7,5MM: JAPAN, CHINA, INDIA

EF COUPLING - ASIA 7,5mm/ Max air flow capacity : 34 l/s / 72 cfm (ΔP 0,5 bars / 7,2 PSI) Economical air flow capacity: 23 l/s / 48 cfm (ΔP 0,2 bars / 2,9 PSI)

| FEMALE THREAD in. | THREAD TYPE | PART NUMBER |
|-------------------|----------------|-------------|
| 1/4" | BSPT | 6158106590 |
| 3/8" | BSPT | 6158106600 |
| 1/2" | BSPT | 6158106610 |



NIPPLES ASIA 7,5mm

| FEMALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS | |
|-------------------|-------------|-------------|---------------|--|
| 1/4" | 1/4" BSPT | | 6158134840 | |
| 3/8" | BSPT | 6158106850 | 6158134850 | |
| 1/2" | BSPT | 6158106870 | 6158134860 | |



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|----------------|-------------|
| 1/4" | BSPT | 6158106560 |
| 3/8" | BSPT | 6158106570 |
| 1/2" | BSPT | 6158106580 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER | SET OF 10 PCS |
|-----------------|-------------|-------------|---------------|
| 1/4" | BSPT | | 6158134810 |
| 3/8" | BSPT | 6158106820 | 6158134820 |
| 1/2" | BSPT | 6158106830 | 6158134830 |



| HOSE CONNECTION mm | PART NUMBER |
|--------------------|-------------|
| 06mm | 6158108710 |
| 08mm | 6158106620 |
| 10mm | 6158106630 |
| 13mm | 6158106640 |



| HOSE CONNECTION mm | PART NUMBER | SET OF 10 PCS |
|--------------------|-------------|---------------|
| 6mm | 6158106970 | 6158134770 |
| 8mm | 6158106880 | 6158134780 |
| 10mm | 6158106890 | 6158134790 |
| 13mm | 6158106900 | 6158134800 |

CLAW COUPLING

ECONOMICAL AIR FLOW 593 CFM - 280 L/S







| FEMALE THREAD | PART NUMBER | |
|---------------|-------------|------------|
| in. | NPT | BSP |
| 3/8 | 6158109150 | 6158109110 |
| 1/2 | 6158109160 | 6158109120 |
| 3/4 | 6158109170 | 6158109130 |
| 1 | 6158109170 | 6158109140 |


QUICK RELEASE COUPLINGS - EURO SERIES: EUROPE

EURO 7,6mm/ Max air flow capacity : 16,5 l/s / 35 cfm (ΔP 0,5 bars / 2,9 PSI) Ergonomical air flow 23,3 cfm - 11 l/s (ΔP 0,5 bars / 2,9 PSI)

| FEMALE THREAD in. | PART NUMBER BSP |
|-------------------|--------------------|
| 1/4 | 8940176751 |
| 3/8 | 8940176752 |
| 1/2 | 8940176753 |



NIPPLES EURO 7.6mm





| MALE THREAD in. | PART NUMBER BSP |
|-----------------|--------------------|
| 1/4 | 8940176748 |
| 3/8 | 8940176749 |
| 1/2 | 8940176750 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|-------------|-------------|
| 1/4 | BSP | 6158105880 |
| 3/8 | BSP | 6158105890 |
| 1/2 | BSP | 6158105900 |



| mm | HOSE |
|------|------------|
| 6 -7 | 8940176754 |
| 10 | 8940176755 |
| 13 | 8940176756 |
| | |




| 06-07 6158106220 09-10 6158106260 13 6158106270 | HOSE CONNECTOR | PART NUMBER |
|--|----------------|-------------|
| | 06-07 | 6158106220 |
| 13 6158106270 | 09-10 | 6158106260 |
| | 13 | 6158106270 |

EURO 10.4 mm/ Max air flow capacity : 33 l/s / 70 cfm (Δ P 0,5 bars / 2,9 PSI) Ergonomical air flow 23,3 cfm - 11 l/s (ΔP 0,5 bars / 2,9 PSI)



| FEMALE THREAD in. | PART NUMBER BSP |
|-------------------|--------------------|
| 3/8 | 8940176760 |
| 1/2 | 8940176761 |
| 3/4 | 8940176762 |







| PART NUMBER BSP | MALE THREAD in. |
|--------------------|-----------------|
| 8940176757 | 3/8 |
| 8940176758 | 1/2 |
| 8940176759 | 3/4 |



| MALE THREAD in. | THREAD TYPE | PART NUMBER |
|-----------------|-------------|-------------|
| 3/8 | BSP | 6158106650 |
| 1/2 | BSP | 6158106660 |
| 3/4 | BSP | 6158106670 |



| HOSE CONNECTION mm | PART NUMBER HOSE |
|-----------------------|---------------------|
| 13 | 8940176763 |
| 16 | 8940176764 |
| 19 | 8940176765 |
| | |



| HOSE CONNECTOR | PART NUMBER |
|----------------|-------------|
| 13 | 6158106780 |
| 16 | 6158106790 |
| 19 | 6158106800 |

HOSE CONNECTORS SCREW



| ACCESSORY'S DESCRIPTION | THREAD SIZE | THREAD TYPE | INTERNAL HOSE Ø | PART NUMBER |
|--------------------------------------|-------------|-------------|--------------------|-------------|
| Hose connector screw 6mm M 1/4" BSP | 1/4" | BSP | 6 | 8951011801 |
| Hose connector screw 8mm M 1/4" BSP | 1/4" | BSP | 8 | 8940175922 |
| Hose connector screw 10mm M 1/4" BSP | 1/4" | BSP | 10 | 8940175923 |
| Hose connector screw 8mm M 3/8" BSP | 3/8" | BSP | 8 | 8940175924 |
| Hose connector screw 10mm M 3/8" BSP | 3/8" | BSP | 10 | 8940175925 |
| Hose connector screw 13mm M 3/8" BSP | 3/8" | BSP | 13 | 8951011804 |
| Hose connector screw 10mm M 1/2" BSP | 1/2" | BSP | 10 | 8940175926 |
| Hose connector screw 13mm M 1/2" BSP | 1/2" | BSP | 13 | 8951011805 |
| Hose connector screw 16mm M 1/2" BSP | 1/2" | BSP | 16 | 8940175927 |
| Hose connector screw 16mm M 3/4" BSP | 3/4" | BSP | 16 | 8940175928 |
| Hose connector screw 16mm M 1" BSP | 1" | BSP | 25 | 8940175929 |

REDUCER



| THR | EAD | PART NUMBER |
|----------|------------|-------------|
| MALE BSP | FEMALE BSP | TART NOMBER |
| 3/8" | 1/4" | 8951011823 |
| 1/2" | 1/4" | 8951011839 |
| 1/2" | 3/8" | 8951011828 |

DOUBLECONNECTOR


| THR | EAD | PART NUMBER |
|----------|------------|-------------|
| MALE BSP | FEMALE BSP | TARTHOMBER |
| 1/4" | 1/4" | 8951011822 |
| 3/8" | 1/4" | 8951011824 |
| 1/2" | 3/8" | 8951011825 |

AIRFUSES

When a fitting comes loose or detached from a pressurized hose or the hose is damaged, the line pressure may cause hose whip. This dangerous situation can easily cause injury and damage.

Fuses are used to reduce the likelihood of potentially dangerous hose whip. Air Fuses are designed to quickly shut off the supply air and reset automatically when the back pressure in the line downstream is restored.

Air Fuses help to meet OSHA requirement 1926.302 (USA) and may eliminate the need for restraining or shielding hose, as required by European Standard EN983.

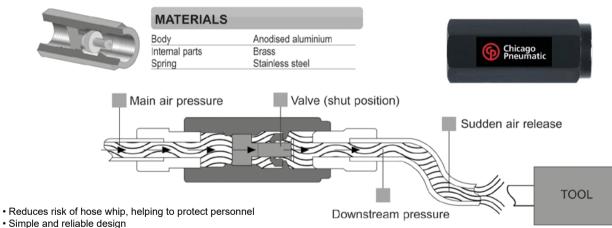

- · High life expectancy
- · Aluminum anodised body for high corrosion resistance
- · Auto-Reset to restart downstream activity with the minimum downtime.

| PORT SIZE | | ROP AT SHUT FLOW | SHUT OFF FLOV | V RATE AT 7 BAR | TOOL MA | X AIR FLOW | FOR FLOW RATES | PART N | NUMBER |
|-----------|------|---------------------|---------------|-----------------|---------|------------|----------------|------------|------------|
| | bar | psi | I/s | cfm | l/s | cfm | in. | BSP | NPT |
| 1/4" | 0,14 | 2,03 | 7,8 | 16,4 | 5 | 10,5 | Low | 6158112420 | 6158112450 |
| 1/4" | 0,3 | 4,35 | 13 | 27,3 | 10 | 21 | High | 110402 | 6158112460 |
| 3/8" | 0,14 | 2,03 | 18 | 37,8 | 10 | 21 | Low | 110422 | 6158112470 |
| 3/8" | 0,3 | 4,35 | 32 | 67,2 | 25 | 52,5 | High | 110432 | 6158112480 |
| 1/2" | 0,3 | 4,35 | 45 | 94,5 | 35 | 73,5 | High | 110442 | 6158112490 |
| 3/4" | 0,3 | 4,35 | 75 | 157,5 | 60 | 126 | High | 6158112430 | 6158112500 |
| 1" | 0,3 | 4,35 | 86 | 180,6 | 70 | 147 | High | 6158112440 | 110542 |

Accessories

BALANCERS - CP9911 TO CP9950

The CP balancers are premium quality products developed to take the weight of the tool away from the operator's arm. They eliminate stress and fatigue and help improve productivity. Ideally suited for heavy tools and/or repetitive tasks.

Spring retractor:


- Cylindrical shape
- Automatic load retraction
- Working area remains free
- Cable made of stainless steel
- Aluminium housing
- 5.2 to 8.2 ft (1,600 to 2,500 mm) cable stroke








CP9911 to CP9913





CP9936 to CP9950

| MODEL | LOAD R | ANGE | ST | ROKE | NET W | /EIGHT | PART | | |
|--------------|---------------------|---------|-----|-------|-------|--------|------------|--|--|
| | lb. | kg | ft | mm | lb. | kg | NUMBER | | |
| Light duty b | ight duty balancers | | | | | | | | |
| CP9911 | 0.8-2.2 | 0.4-1.0 | 5.2 | 1,600 | 1.3 | 0.6 | 8941099110 | | |
| CP9912 | 2.2-4.4 | 1.0-2.0 | 5.2 | 1,600 | 1.3 | 0.6 | 8941099120 | | |
| CP9913 | 4.4-6.6 | 2.0-3.0 | 5.2 | 1,600 | 1.5 | 0.7 | 8941099130 | | |
| Medium dut | y balancers | | | | | | | | |
| CP9920 | 2.2-5.5 | 1.0-2.5 | 6.5 | 2,000 | 4.4 | 2.0 | 8941099200 | | |
| CP9921 | 4.4-8.8 | 2.0-4.0 | 6.5 | 2,000 | 4.4 | 2.0 | 8941099210 | | |
| CP9922 | 8.8-13.2 | 4.0-6.0 | 6.5 | 2,000 | 5.1 | 2.3 | 8941099220 | | |
| CP9923 | 13.2-17.6 | 6.0-8.0 | 6.5 | 2,000 | 2.5 | 5.5 | 8941099230 | | |
| Medium dut | y balancers | | | | | | | | |
| CP9936 | 4.4-8.8 | 2.0-4.0 | 8.2 | 2,500 | 6.4 | 2.9 | 8941099360 | | |
| CP9937 | 8.8-13.2 | 4.0-6.0 | 8.2 | 2,500 | 7.1 | 3.2 | 8941099370 | | |
| CP9938 | 13.2-17.6 | 6.0-8.0 | 8.2 | 2,500 | 7.7 | 3.5 | 8941099380 | | |
| CP9939 | 17.6-22.0 | 8.0-10 | 8.2 | 2,500 | 8.2 | 3.7 | 8941099390 | | |
| CP9940 | 22.0-30.8 | 10-14 | 8.2 | 2,500 | 8.8 | 4.0 | 8941099400 | | |
| CP9946* | 4.4-8.8 | 2.0-4.0 | 8.2 | 2,500 | 6.6 | 3.0 | 8941099460 | | |
| CP9947* | 8.8-13.2 | 4.0-6.0 | 8.2 | 2,500 | 7.3 | 3.3 | 8941099470 | | |
| CP9948* | 13.2-17.6 | 6.0-8.0 | 8.2 | 2,500 | 7.9 | 3.6 | 8941099480 | | |
| CP9949* | 17.6-22.0 | 8.0-10 | 8.2 | 2,500 | 8.4 | 3.8 | 8941099490 | | |
| CP9950* | 22.0-30.8 | 10-14 | 8.2 | 2,500 | 8.8 | 4.0 | 8941099500 | | |
| | | | | | | | | | |

^{*} Equipped with a stroke locking device

BALANCERS - CP9954 TO CP9971

Reaction free:

- Conical shape


- Constant retracting force
 Holds the selected height
 Cable made of stainless steel
- Aluminium housing
- 6.5 ft (2,000 mm) cable stroke









CP9954 to CP9959







| MODEL | LOAD RA | ANGE | STR | ROKE | NET W | EIGHT | PART |
|----------------------------|--------------|------------|-----|-------|-------|-------|------------|
| | lb. | kg | ft | mm | lb. | kg | NUMBER |
| Medium dut | y to heavy d | uty balanc | ers | | | | |
| CP9954 | 8.8-15.4 | 4.0-7.0 | 6.5 | 2,000 | 11.0 | 5.0 | 8941099540 |
| CP9955 | 15.4-22 | 7.0-10 | 6.5 | 2,000 | 12.1 | 5.5 | 8941099550 |
| CP9956 | 22-30.9 | 10-14 | 6.5 | 2,000 | 12.1 | 5.5 | 8941099560 |
| CP9957 | 31-39.7 | 14-18 | 6.5 | 2,000 | 14.3 | 6.5 | 8941099570 |
| CP9958 | 39.7-48.5 | 18-22 | 6.5 | 2,000 | 13.2 | 6.0 | 8941099580 |
| CP9959 | 48.5-55 | 22-25 | 6.5 | 2,000 | 14.6 | 6.6 | 8941099590 |
| Heavy duty | balancers | | | | | | |
| CP9964 | 55-66 | 25-30 | 6.5 | 2,000 | 25.4 | 11.5 | 8941099640 |
| CP9965 | 66-77 | 30-35 | 6.5 | 2,000 | 26.0 | 11.8 | 8941099650 |
| CP9966 | 77-99 | 35-45 | 6.5 | 2,000 | 27.3 | 12.4 | 8941099660 |
| CP9967 | 99-121 | 45-55 | 6.5 | 2,000 | 27.6 | 12.5 | 8941099670 |
| CP9968 | 121-143 | 55-75 | 6.5 | 2,000 | 30.0 | 13.6 | 8941099680 |
| CP9969 | 143-165 | 65-75 | 6.5 | 2,000 | 32.0 | 14.5 | 8941099690 |
| Super heavy duty balancers | | | | | | | |
| CP9970 | 165-198 | 75-90 | 6.5 | 2,000 | 38.1 | 17.3 | 8941099700 |
| CP9971 | 198-231 | 90-105 | 6.5 | 2,000 | 39.7 | 18.0 | 8941099710 |

Accessories

BALL VALVES

Suitable for air, water and many other liquids and gases.



| DESCRIPTION | FEMALE THREAD | PART N | UMBER |
|-------------|---------------|------------|------------|
| DESCRIPTION | in. | NPT | BSP |
| CP BAL 08 | 1/4 | 6158109490 | 6158109410 |
| CP BAL 10 | 3/8 | 6158109500 | 6158109420 |
| CP BAL 15 | 1/2 | 6158109510 | 6158109430 |
| CP BAL 20 | 3/4 | 6158109520 | 6158109440 |
| CP BAL 25 | 1 | 6158109530 | 6158109450 |
| CP BAL 32 | 1-1/4 | - | 6158109460 |
| CP BAL 40 | 1-1/2 | - | 6158109470 |
| CP BAL 50 | 2 | - | 6158109480 |

LUBRICATION



OIL PROTECTO-LUBE

| ACCESSORY'S DESCRIPTION | PART NUMBER |
|--------------------------------------|-------------|
| Oil for cleaning motor parts (0,12L) | 8940176598 |
| Oil for cleaning motor parts (0,59L) | 8940176597 |
| Oil for air lubrication (3,8L) | 8940176599 |



MINI OILER

| ACCESSORY'S DESCRIPTION | PART NUMBER |
|-------------------------|---------------------|
| 2050524123 | 1/4" NPT Mini Oiler |
| 2050524293 | 3/8" NPT Mini Oiler |



INLINE OILERS

| PART NUMBER | CAPACITY | THREAD SIZE | MAX WORKING PRESSURE |
|-------------|----------|-------------|----------------------|
| 6158120480 | 30 ML | 1/4" BSP | 34,0 bar (500 psi) |
| 6158120490 | 40 ML | 1/2" BSP | 34,0 bar (500 psi) |
| 6158120500 | 110 ML | 3/4" BSP | 18,0 bar(260 psi) |



360° SWIVEL AIR INLET

Aimed to improve the working ergonomy, Air flex connectors can rotate 360° eliminating efforts when working in cramped spaces

| | PART NUMBER |
|--------|-------------|
| Swivel | 8940158412 |

^{*} Air Inlet: 1/4" BSP

BLOW GUN



| DESCRIPTION | PART NUMBER |
|-----------------------------------|--------------|
| Blow gun standard | 615 811 2690 |
| Blow gun standard silencer | 615 811 2700 |
| Blow gun extended nozzle | 615 811 2710 |
| Blow gun extended nozzle silencer | 615 811 2720 |

All models: Air inlet 1/4"BSP

| Notes | | |
|-------|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

GENERAL SAFETY INSTRUCTIONS FOR THE OPERATION OF POWER TOOLS

The goal of CP is to produce tools that help the operator work safely and efficiently. The most important safety device for this or any tool is the operator. Care and good judgement are the best protection against injury. All possible hazards cannot be covered here, but we have tried to highlight some of the important ones. Individuals should look for and obey Caution, Warning and Danger Signs placed on tools, and displayed in the workplace. Operators should read and follow safety instructions packed with each tool. For a copy of these instructions, contact your nearest CP representative via www.cp.com.

Learn how each tool works. Even if you have previously used similar tools, carefully check out each tool before you use it. Get the "feel" of it and know capabilities, limitations, potential hazards, how it operates and how it stops.



WARNING

Multiple Hazards. Read and understand safety instructions supplied with tool before operating or servicing. Failure to do so can result in serious bodily injury.

All tools are designed to operate on a air line pressure of 90 PSI (6.3 bar +/-0.15) bar in accordance with ISO2787, 8NTC1.2. Sound levels +/- 3dB(A)* are measured in accordance with EN ISO15744. Vibration values* are measured in accordance with ISO8662 & ISO28927

A higher pressure could affect the tools lifespan, and operator safety (excessive vibration, or abrasive over-speed and burst risk). We recommend the use of a gauge equipped FRL for every tool to operate this adjustment.

*These declared values were obtained by laboratory type testing in accordance with the stated standards and are suitable for comparison with the declared values of other tools tested in accordance with the same standards. These declared values are not adequate for use in risk assessments and values measured in individual work places may be higher. The actual exposure values and risk of harm experienced by an individual user are unique and depend upon the way the user works, the workpiece and the workstation design, as well upon the exposure time and the physical condition of the user.

We, CP, cannot be held liable for the consequences of using the declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control.



Compressed Air Hazards

- Air under pressure can cause injury. Never point an air hose at yourself or anyone else. Never blow your clothes free of dust with compressed air. Always direct exhaust air away from yourself and others in the work area.
- · Always check for damaged or loose hoses and fittings before using an air tool, and replace if necessary. Whipping hoses can cause serious injury.
- Disconnect the tool from the air supply when not in use, before changing accessories, setting the torque, or when making repairs.
- Do not exceed rated air pressure to increase the output of the tool. This could cause injury and shorten tool life.
- Do not assemble quick coupler on the tool. Vibration can cause breakage resulting in a whipping air hose. Instead, use quick couplers on the end of a short leader hose.
- When universal twist couplings are used, lock pins must be installed to prevent accidental hose disconnection.
- · Air tools are not intended for use in explosive atmospheres and are not insulated for contact with electric power sources.

0

Projectile Hazards for all air tools

 Always wear impact resistant eye and face protection when involved with or near the operation or the repair of air tools.



Noise Hazards

- Hearing loss can result from prolonged exposure to excessive sound levels
- Use hearing protection as recommended by your employer or OSHA regulation (see 29 CFR part 1910).



Entanglement Hazards

• To reduce the risk of injury from entanglement, do not wear loose clothing when using rotating accessories.



Breathing Hazards

• Proper breathing protection must be worn when working with materials which produce airborne particles.



Vibration Hazards

- Repetitive work motions, awkward positions and exposure to vibration may be harmful to your hands and arms.
- If numbness, tingling, pain or whitening of the skin occurs, stop using tool and consult a physician.



Additional Hazards

- · Slip/Trip/Fall is a major cause of serious injury or death. Beware of excess hose/cord left on the walking or work surface.
- Operators and maintenance personnel must be physically fit to perform job tasks, and handle the bulk, weight and power of the tool.
- Deburring tools should be used to reduce risk of cuts and abrasions due to burrs.
- · Wear gloves to protect hands from sharp edges.

SPECIFIC SAFETY INSTRUCTIONS FOR POWER TOOL GROUPS

In addition to the General Safety Instructions, the following are safety instructions and warnings that apply to the safe operation of specific power tool groups. Consult ANSI B186.1 Safety Code for Portable Air Tools. Available from: America National Standards Institute (ANSI), 11 W. 42nd St., 13th floor, New York, New York 10036, (212) 642-4900; or the European Committee for Standardization, Rue de Stassart 36, 1050 Brussels, Belgium.



Impact Wrenches



- Never use hand sockets. Use only impact sockets in good condition. Sockets in poor condition reduce impact power and could also shatter, resulting in personal injury.
- · When using a universal joint, never free run the tool, it may run too fast and cause the joint to be thrown from the tool.
- Always use the simplest hook-up possible. Long springy extension bars and adapters absorb impact power and could break loose resulting in personal injury. Instead, use deep sockets whenever possible.
- For tools using the pin and o-ring socket retainer, use the o-ring to securely retain the socket pin.

\triangle

Abrasive Tools



- Never mount a grinding wheel on a sander.
- Never use a grinding wheel marked with a speed lower than the rated air grinder speed.
- · All grinding wheels and polishing/sanding accessories should be checked for cracks or other damage before mounting and use.
- Always use the recommended wheel guard to prevent injury when performing grinding operations. If a guard has withstood wheel or disc breakage, it must be replaced.
- Position a guard between the grinding wheel or disc and the operator. Use barriers to protect others from fragments and grinding sparks.
- Make sure grinding wheels are mounted according to manufacturer's specifications; always use correct mounting flanges.
- Before grinding, test grinding wheel or disc by briefly running tool at full throttle. Be sure to use a barrier (such as under a heavy work table) to protect yourself from possible broken wheel parts.
- Never tamper with or remove a speed governor from a tool to make it run faster. Periodically check tool speed with a tachometer.



Assembly Tools



- Serious injury can result from over-torqued or undertorqued fasteners, which can break, or loosen and separate.
- Released assemblies can become projectiles. Assemblies requiring a specific torque must be checked using a torque meter.



Hammers



- All chisels, rivet sets and other accessories should be checked for cracks, excessive wear, or other physical damage before each use. Accessories that show signs of damage should be replaced immediately.
- Never use a tool without the proper accessory retainer.



Ratchets



- Never use hand sockets. Use only power drive sockets per ANSI B107.2.
- To reduce the risk of injury, always support the handle securely in the direction opposite of the spindle rotation to minimize torque reaction.



Specialty Tools



 Specific instructions/warnings affecting this group of tools are contained in product-specific documents accompanying each product.



Drills



- Keep away from rotating bit and chuck.
 You can become cut or burned if you come in contact with the drill bit, chips or work surface.
- Use intermittent drill pressure to avoid long shaved chips.
- The drill bit can suddenly bind and cause the work piece or tool to rotate causing arm and shoulder injuries.
- ANSI recommends use of a support handle on drills with a chuck larger than 3/8" (10 mm).

Accessories



- Always use accessories of correct size and design for the tool. Tool and accessories must not be modified in any way.
- Never use a tool without the proper accessory retainer.

See Safety Requirements for Abraiding Materials with Coated Abrasives (B7.7) from ANSI.

Index

| MODEL | PART NUMBER | DESCRIPTION | PAGE |
|----------------------|-----------------------|-----------------------------------|------------|
| CP2136 | 8941021360 | Screwdrivers | P.5 |
| CP2141 | 8941021410 | Screwdrivers | P.5 |
| CP2755 | 6151922755 | Screwdrivers | P.5 |
| CP2765 | 6151922765 | Screwdrivers | P.5 |
| CP2780 | 6151922780 | Screwdrivers | P.5 |
| CP3510 | 6151933510 | Pneumatic Sanders & Polishers | P.7 |
| CP3511 | 6151933511 | Pneumatic Sanders & Polishers | P.7 |
| CP3512 | 6151933512 | Pneumatic Sanders & Polishers | P.7 |
| CP3514 | 6151933514 | Pneumatic Sanders & Polishers | P.7 |
| CP5000 | T024585 8941071101 | Impact Wrenches | P.2 |
| CP7110 CP7110 Kit | 8941171101 | Percussive Tools Percussive Tools | P.8 P.9 |
| CP7110 Kil | 8941071110 | Percussive Tools Percussive Tools | P.8 |
| CP7111HK | 8941171111 | Percussive Tools | P.9 |
| CP71111K | 89411711110 | Percussive Tools | P.9 |
| CP7111K | 8941071150 | Percussive Tools | P.9 |
| CP7120 | 8941071200 | Percussive Tools | P.9 |
| CP7125 | 8941071250 | Percussive Tools | P.9 |
| CP714 | T012735 | Percussive Tools | P.11 |
| CP714 Kit | T025364 | Percussive Tools | P.11 |
| CP7150 | 8941071500 | Percussive Tools | P.8 |
| CP7150K | 8941171500 | Percussive Tools | P.9 |
| CP7160 | 8941071600 | Percussive Tools | P.8 |
| CP7160K | 8941071601 | Percussive Tools | P.9 |
| CP7165 | 8941071650 | Percussive Tools | P.8 |
| CP7165K | 8941071651 | Percussive Tools | P.9 |
| CP717 | T020120 | Percussive Tools | P.11 |
| CP717 Kit | T025365 | Percussive Tools | P.11 |
| CP7200 | 8941072001 | Pneumatic Sanders & Polishers | P.8 |
| CP7201 | 8941072014 | Sanders & Polishers | P.8 |
| CP721 | T021963 | Impact Wrenches | P.1 |
| CP7215 | 8941072151 | Pneumatic Sanders & Polishers | P.7 |
| CP7215CVE | 8941272153 | Pneumatic Sanders & Polishers | P.7 |
| CP7215E | 8941272151 | Pneumatic Sanders & Polishers | P.7 |
| CP7215HCVE | 8941272155 | Pneumatic Sanders & Polishers | P.7 |
| CP7215SVE | 8941272152 | Pneumatic Sanders & Polishers | P.7 |
| CP7225 | 8941072251 | Pneumatic Sanders & Polishers | P.7 |
| CP7225-3 | 8941072257 | Pneumatic Sanders & Polishers | P.7 |
| CP7225CV | 8941072253 | Pneumatic Sanders & Polishers | P.7 |
| CP7225CVE | 8941272253 | Pneumatic Sanders & Polishers | P.7 |
| CP7225CVE-3 | 8941272258 | Pneumatic Sanders & Polishers | P.7 |
| CP7225E | 8941272251 | Pneumatic Sanders & Polishers | P.7 |
| CP7225E-3 | 8941272257 | Pneumatic Sanders & Polishers | P.7 |
| CP7225SVE | 8941272252 | Pneumatic Sanders & Polishers | P.7 |
| CP7255 | 8941072551 | Pneumatic Sanders & Polishers | P.7 |
| CP7255CV | 8941072553 | Pneumatic Sanders & Polishers | P.7 |
| CP7255CVE | 8941272553 | Pneumatic Sanders & Polishers | P.7 |
| CP7255CVE-3 | 8941272558 | Pneumatic Sanders & Polishers | P.7 |
| CP7255E | 8941272551 | Pneumatic Sanders & Polishers | P.7 |
| CP7255E-3 | 8941272557 | Pneumatic Sanders & Polishers | P.7 |
| CP7255H | 8941072554 | Pneumatic Sanders & Polishers | P.7 |
| P7255HCVE | 8941272555 | Pneumatic Sanders & Polishers | P.7 |
| P7255SV | 8941072552 | Pneumatic Sanders & Polishers | P.7 |
| CP7255SVE | 8941272552 | Pneumatic Sanders & Polishers | P.7 |
| P7263CVE | 8941172650 | Pneumatic Sanders & Polishers | P.8 |
| P7263E | 8941072650 | Pneumatic Sanders & Polishers | P.8 |
| P7264CVE | 8941172640 | Pneumatic Sanders & Polishers | P.8 |
| P7264E | 8941072640 | Pneumatic Sanders & Polishers | P.8 |
| P7266CVE | 8941172660 | Pneumatic Sanders & Polishers | P.8 |
| P7266E | 8941072660 | Pneumatic Sanders & Polishers | P.8 |
| P7267CVE | 8941172670 | Pneumatic Sanders & Polishers | P.8 |
| P7267E | 8941072670 | Pneumatic Sanders & Polishers | P.8 |
| P7268 | 8941072680 | Sanders & Polishers | P.8 |
| P7269P | 8941078691 | Sanders & Polishers | P.8 |
| P7269S | 8941078690 | Sanders & Polishers | P.8 |
| P7300C | 8941073013 | Drills | P.9 |
| P7300RC | 8941073011 | Drills | P.9 |
| P7300RQCC | 8941073012 | Drills | P.9 |
| P734H | T024351 | Impact Wrenches | P.11 |
| P734H Kit | T025163 | Impact Wrenches | P.11 |
| P734H Kit Metric | T025164 | Impact Wrenches | P.11 |
| P7405 | 8941074050 | Grinders | P.6 |
| P7406 | 8941074060 | Grinders | P.6 |
| P7408 | 8941074080 | Grinders | P.6 |
| CP7410 | 8941074100 | Grinders | P.6 |
| CP7411 | 8941074110 | Grinders | P.6 |
| D= 440 | 9044074420 | Grinders | P.6 |
| CP7412 CP749 | 8941074120 | Officers | |

| MODEL | PART NUMBER | DESCRIPTION | PAGE |
|----------------------|--------------------------|---------------------------------|----------------|
| CP7540-C | 8941075401 | Grinders | P.65 |
| CP7545-B | 8941075452 | Grinders | P.65 |
| CP7545-C | 8941075451 | Grinders | P.65 |
| CP7550-A CP7550-B | 8941075503 8941075502 | Grinders Grinders | P.65 P.65 |
| CP7550-C | 8941075502 8941075501 | Grinders | P.65 |
| CP7600C-R4P | 8941076035 | Pneumatic Torque Wrenches | P.49 |
| CP7600xB | 8941076010 | Pneumatic Torque Wrenches | P.49 |
| CP7600xB-R | 8941076011 | Pneumatic Torque Wrenches | P.49 |
| CP7600xB-R4P | 8941076015 | Pneumatic Torque Wrenches | P.49 |
| CP7600xC-R4P | 8941076025 | Pneumatic Torque Wrenches | P.49 |
| CP7630 | 8941076300 | Impact Wrenches | P.21 |
| CP7722 | 8941077220 | Impact Wrenches | P.14 |
| CP7729 | 8941077290 | Impact Wrenches | P.14 P.112 |
| CP772H CP772H-6 | T024598 T024757 | Impact Wrenches Impact Wrenches | P.112 P.112 |
| CP772HK | T024757 | Impact Wrenches | P.112 |
| CP772HK-Metric | T025162 | Impact Wrenches | P.118 |
| CP7731 | 8941077310 | Impact Wrenches | P.17 |
| CP7731C | 8941077311 | Impact Wrenches | P.15 |
| CP7732 | 8941077320 | Impact Wrenches | P.17 |
| CP7732C | 8941077321 | Impact Wrenches | P.15 |
| CP7737 | 8941077370 | Impact Wrenches | P.16 |
| CP7739 | 8941077390 | Impact Wrenches | P.14 |
| CP7741 | 8941077410 | Impact Wrenches | P.17 |
| CP7741-2 | 8941077412 | Impact Wrenches | P.17 |
| CP7748 | 8941077481 | Impact Wrenches | P.18 |
| CP7748-2 | 8941077486 | Impact Wrenches | P.18 |
| CP7748TL-2 | 8941077484 8941077485 | Impact Wrenches Impact Wrenches | P.19 P.19 |
| CP7755 | 8941077550 | Impact Wrenches | P.19 |
| CP7755 Air Flex Mini | 8941077551 | Impact Wrenches | P.17 |
| CP7762 | 8941077620 | Impact Wrenches | P.21 |
| CP7763 | 8941077630 | Impact Wrenches | P.21 |
| CP7763-6 | 8941077636 | Impact Wrenches | P.21 |
| CP7763D-6 | 8941077637 | Impact Wrenches | P.22 |
| CP7769 | 8941077691 | Impact Wrenches | P.20 |
| CP7769-6 | 8941077697 | Impact Wrenches | P.20 |
| CP7773 | 8941077730 | Impact Wrenches | P.22 |
| CP7773D | 8941077731 | Impact Wrenches | P.22 |
| CP7773D-6 | 8941077737 | Impact Wrenches | P.22 |
| CP7776 CP7776-6 | 8941077760 8941077766 | Impact Wrenches Impact Wrenches | P.23 P.23 |
| CP7779 | 8941077791 | Impact Wrenches | P.23 |
| CP7782 | 8941077820 | Impact Wrenches | P.24 |
| CP7782-6 | 8941077826 | Impact Wrenches | P.24 |
| CP7782-SP6 | 8941077821 | Impact Wrenches | P.24 |
| CP7782TL-6 | 8941077827 | Impact Wrenches | P.24 |
| CP7783 | 8941077830 | Impact Wrenches | P.23 |
| CP7783-6 | 8941077836 | Impact Wrenches | P.23 |
| CP781 | T025096 | Screwdrivers | P.113 |
| CP782 | T025097 | Screwdrivers | P.113 |
| CP7829 | 8941078293 | Ratchet Wrenches | P.28 |
| CP7829H | 8941078294 | Ratchet Wrenches | P.28 |
| CP7830HQ | 8941078308 8941078306 | Ratchet Wrenches | P.28 |
| CP7830Q CP785 | 8941078306 T022698 | Ratchet Wrenches Drills | P.28 P.115 |
| CP785H | T024134 | Drills | P.115 P.115 |
| CP785QC | T024242 | Drills | P.115 |
| CP785S | T023200 | cutting tools | P.117 |
| CP789HR | T025165 | Drills | P.115 |
| CP789R-26 | T025180 | Drills | P.115 |
| CP789R-42 | T025198 | Drills | P.115 |
| CP7900 | 8941079000 | Cutting Tools | P.103 |
| CP7901 | 8941079011 | Cutting Tools | P.102 |
| CP7901K | 8941079010 | Cutting Tools | P.102 |
| CP796 CP797 | T019799 | Impact Wrenches | P.23 |
| CP797 CP797-6 | T019139 T013901 | Impact Wrenches Impact Wrenches | P.113 P.113 |
| CP797-6 CP797SP6 | T018653 | Impact Wrenches | P.113 P.113 |
| CP80020 | 8941181020 | Lift Equipment | P.124 |
| CP80022 | 8941098900 | Lift Equipment | P.124 |
| CP80030 | 8941181030 | Lift Equipment | P.124 |
| CP80031 | 8941181031 | Lift Equipment | P.124 |
| CP81020 | 8941081020 | Lift Equipment | P.123 |
| CP81030 | 8941081030 | Lift Equipment | P.123 |
| CP81050 | 8941081050 | Lift Equipment | P.123 |
| CP81080 | 8941081080 | Lift Equipment | P.123 |
| CP81120 | 8941181120 | Lift Equipment | P.123 |

| MODEL | PART NUMBER | DESCRIPTION | PAG |
|---|-----------------------|--|------------|
| CP81200 | 8941081200 | Lift Equipment | P.12 |
| CP81300 | 8941081300 | Lift Equipment | P.12 |
| CP82020 | 8941082020 | Lift Equipment | P.12 |
| CP82030 | 8941082030 | Lift Equipment | P.12 |
| CP82060 | 8941082060 | Lift Equipment | P.12 |
| CP82120 | 8941082120 | Lift Equipment | P.12 |
| CP82200 CP824 | 8941082200 T025390 | Lift Equipment Ratchet Wrenches | P.12 |
| CP825C | 8941082511 | Ratchet Wrenches | P.2 |
| CP825CT | 8941082512 | Ratchet Wrenches | P.2 |
| CP826 | T025074 | Ratchet Wrenches | P.2 |
| CP826T | T025075 | Ratchet Wrenches | P.2 |
| CP828 | T022708 | Ratchet Wrenches | P.1 |
| CP828H | T022970 | Ratchet Wrenches | P.1 |
| CP828HK-Metric | T024448 | Ratchet Wrenches | P.1 |
| CP83100 | 8941083100 | Workshop Cranes | P.1: |
| CP8323 CORDLESS TIRE BUFFER BARE TOOL | 8941083230 | Cordless Tire Buffer | P.1 |
| CP8323 CORDLESS TIRE BUFFER KIT | 8941183230 | Cordless Tire Buffer | P.1 |
| CP8323 CORDLESS TIRE BUFFER KIT NA VERSION | 8941283230 | Cordless Tire Buffer | P.1 |
| CP84010 | 8941084010 | Wheel Dollies Car Positionners | P.1 |
| CP85030 | 8941085030 | Lift Equipment | P.1 |
| CP85031 | 8941085031 | Lift Equipment | P.1 |
| CP85050 | 8941085050 | Lift Equipment | P.1 |
| CP85080 | 8941085080 | Lift Equipment | P.1 |
| CP85100 | 8941085100 | Lift Equipment | P.1 |
| CP854 | T023186 | Grinders | P.1 |
| CP854E | T023187 | Grinders | P.1 |
| CP857 | T024387 | Grinders | P.1 |
| CP858 | T025179 | Sanders & Polishers | P.1 |
| CP860 | T019704 | Grinders | P.1 |
| CP8609-B PACK 36V 2.5AH | 6151570500 | Battery Torque Wrenches | P. |
| CP8609-BT PACK 36V 2.5AH | 6151570440 | Battery Torque Wrenches | P. |
| CP8609-C PACK 36V 2.5AH | 6151570730 | Battery Torque Wrenches | P. |
| CP8609C-B PACK 36V 2.5AH | 6151570510 | Battery Torque Wrenches | P. |
| CP8609C-BT PACK 36V 2.5AH | 6151570450 | Battery Torque Wrenches | P. |
| CP8609C-C PACK 36V 2.5AH | 6151570740 | Battery Torque Wrenches | P. |
| CP8609C-CT PACK 36V 2.5AH | 6151570570 | Battery Torque Wrenches | P. |
| CP8609CQ-B PACK 36V 2.5AH | 6151570520 | Battery Torque Wrenches | P. |
| CP8609CQ-BT PACK 36V 2.5AH | 6151570460 | Battery Torque Wrenches | P. |
| CP8609CQ-C PACK 36V 2.5AH | 6151570750 | Battery Torque Wrenches | P. |
| CP8609CQ-CT PACK 36V 2.5AH | 6151570580 | Battery Torque Wrenches | P. |
| CP8609CQ-xC PACK 36V 2.5AH | 6151570800 | Battery Torque Wrenches | P. |
| CP8609CQ-xCT PACK 36V 2.5AH | 6151570640 | Battery Torque Wrenches | P. |
| CP8609-CT PACK 36V 2.5AH | 6151570560 | Battery Torque Wrenches | P. |
| CP8609C-xC PACK 36V 2.5AH | 6151570790 | Battery Torque Wrenches | P. |
| CP8609C-xCT PACK 36V 2.5AH | 6151570630 | Battery Torque Wrenches | P. |
| CP8609TC-B PACK 36V 2.5AH | 6151570530 | Battery Torque Wrenches | P. |
| CP8609TC-BT PACK 36V 2.5AH | 6151570470 | Battery Torque Wrenches | P. |
| CP8609TC-C PACK 36V 2.5AH | 6151570760 | Battery Torque Wrenches | P. |
| CP8609TC-CT PACK 36V 2.5AH | 6151570590 | Battery Torque Wrenches | P. |
| CP8609TC-xC PACK 36V 2.5AH | 6151570810 | Battery Torque Wrenches | P. |
| CP8609TC-xCT PACK 36V 2.5AH | 6151570650 | Battery Torque Wrenches | P. |
| CP8609-xC PACK 36V 2.5AH | 6151570780 | Battery Torque Wrenches | P. |
| CP8609-xCT PACK 36V 2.5AH | 6151570620 | Battery Torque Wrenches | P. |
| CP860E | T021136 | Grinders | P.1 |
| CP860ES | T023193 | Grinders | P.1 |
| CP860ESE CP861 | T023354 T022039 | Grinders Cutting tools | P.1 P.1 |
| CP86100 | 8941086100 | Workshop Presses | P.1 |
| CP86101 | 8941086101 | Workshop Presses | P.1 |
| CP86150 | 8941086150 | Workshop Presses | P.1 |
| CP86151 | 8941086151 | Workshop Presses | P.1 |
| CP86200 | 8941086200 | Workshop Presses | P.1 |
| CP86201 | 8941086201 | Workshop Presses | P.1 |
| CP86300 | 8941086300 | Workshop Presses | P.1 |
| CP86301 | 8941086301 | Workshop Presses | P.1 |
| CP86500 | 8941086500 | Workshop Presses | P.1 |
| | 8941086501 | Workshop Presses | P.1 |
| CP86501 | 8941086750 | Workshop Presses | P.1 |
| CP86750 | 0041000100 | | |
| | 8941086751 | Workshop Presses | P.1 |
| CP86750 CP86751 | | Workshop Presses Pneumatic Sanders & Polishers | |
| CP86750 | 8941086751 | | P.1 P. |
| CP86750 CP86751 CP870 | 8941086751 T023990 | Pneumatic Sanders & Polishers | P. |

| MODEL | PART NUMBER | DESCRIPTION | PAGE |
|--------------------|--------------------------|--|----------------|
| CP873C-HD | 8940177048 | Speciality Tools | P.104 |
| CP873C-HDES | 8940177047 | Speciality Tools | P.104 |
| CP874 | T025375 | Cutting Tools | P.105 |
| CP875 CP876 | T023995 | Grinders Grinders | P.60 |
| CP876 CP879C | T023996 8941008790 | Grinders Drills | P.60 P.97 |
| CP881 | T023916 | | P.97 P.117 |
| CP8854 BARE TOOL | 8941088548 | Cutting tools Cordless Impact Wrenches | P.117 P.54 |
| CP8854 Pack 18V | 8941088540 | Cordless Impact Wrenches | P.55 |
| CP8854-2 BARE TOOL | 8941088549 | Cordless Impact Wrenches | P.54 |
| CP8854-2 Pack 18V | 8941088542 | Cordless Impact Wrenches | P.55 |
| CP886 | T024240 | Ratchet Wrenches | P.28 |
| CP886H | T024391 | Ratchet Wrenches | P.28 |
| CP887C | 8941008870 | Drills | P.98 |
| CP8905 | 8941089055 | Torque Wrenches | P.37 |
| CP8905 E | 8941089050 | Torque Wrenches | P.37 |
| CP8910 | 8941089105 | Torque Wrenches | P.37 |
| CP8910 E | 8941089100 | Torque Wrenches | P.37 |
| CP8915 | 8941089155 | Torque Wrenches | P.37 |
| CP8915 E | 8941089150 | Torque Wrenches | P.37 |
| CP8916 | 8941089160 | Electronic Torque Wrenches | P.39 |
| CP8916TC | 8941089161 | Electronic Torque Wrenches | P.39 |
| CP8917 | 8941089175 | Torque Wrenches | P.37 |
| CP8917 E | 8941089170 | Torque Wrenches | P.37 |
| CP8918 | 8941089180 | Electronic Torque Wrenches | P.39 |
| CP8918TC | 8941089181 | Electronic Torque Wrenches | P.39 |
| CP8920 | 8941089205 | Torque Wrenches | P.37 |
| CP8920 E | 8941089200 | Torque Wrenches | P.37 |
| CP8925 | 8941089255 | Torque Wrenches | P.37 |
| CP8925 E | 8941089250 | Torque Wrenches | P.37 |
| CP90250 | 8941090250 | Jump Starters | P.130 |
| CP90500 | 8941090500 | Jump Starters | P.130 |
| CP90600 | 8941090600 | Jump Starters | P.130 |
| CP9104Q | 6151959104 | Grinders | P.60 |
| CP9107 | 6151959107 | Grinders | P.61 |
| CP9116 | 8941091160 | Cutting Tools | P.105 |
| CP9120CR | 6151952120 | Grinders | P.67 |
| CP9120CRN | 8941091200 | Grinders | P.67 |
| CP9121AR | 6151957321 | Grinders | P.67 |
| CP9121BR | 6151957221 | Grinders | P.67 |
| CP9121CR | 6151952121 | Grinders | P.67 |
| CP9122BR | 6151957222 | Grinders | P.67 |
| CP9122CR | 6151952122 | Grinders | P.67 |
| CP9123 | 6151959123 | Grinders | P.68 |
| CP9285C | 8941092850 | Drills | P.97 |
| CP9286C | 8941092860 | Drills | P.98 |
| CP9287C | 8941092870 | Drills | P.97 |
| CP9288C | 8941092880 | Drills | P.98 |
| CP9426 | 6151919426 | Ratchet Wrenches | P.26 |
| CP9427 | 6151919427 | Ratchet Wrenches | P.26 |
| CP9705 | 6151939705 | Speciality Tools | P.107 |
| CP9710 | 6151939710 | Speciality Tools | P.107 |
| CP9779 | 6151939779 | Sanders & Polishers | P.84 |
| CP9780 | 6151939780 | Sanders & Polishers | P.84 |
| CP9789C | 8941097890 | Drills | P.98 |
| CP9790C | 8941097900 | Drills | P.97 |
| CP9791C | 8941097910 | Drills | P.98 |
| CP9792C | 8941097920 | Drills | P.97 |
| CP9882 | 8941098820 | Riveting Tools | P.108 |
| CP9885 | 6151979885 | Speciality Tools | P.107 |
| CP9886 | 8941098860 | Riveting Tools | P.108 |
| CP9887 | 8941098870 | Riveting Tools | P.108 |
| CP9888 | 8941098880 | Riveting Tools | P.109 |
| CP9778 | 6151939778 | Sanders & Polishers | P.78 |
| CP9779 | 6151939779 | Sanders & Polishers | P.80 |
| CP9780 | 6151939780 | Sanders & Polishers | P.80 |
| CP9789C | 8941097890 | Drills Drills | P.94 |
| CP9790C | 8941097900 | Drills | P.93 |
| CP9791C CP9792C | 8941097910 | Drills Drills | P.94 |
| | 8941097920 | Drills | P.93 |
| CP9882 | 8941098820 | Riveting tools | P.103 |
| CP9882 | 8941098820 | Riveting tools | P.103 |
| CP9885 | 6151979885 | Speciality tools | P.102 |
| CP9886 | 8941098860 | Riveting tools | P.103 |
| CP9886 | 8941098860 | Riveting tools | P.103 |
| CP9887 | 8941098870 | Riveting tools | P.103 |
| CP9887 | 8941098870 | Riveting tools | P.103 |
| CP9888 CP9888 | 8941098880 8941098880 | Riveting tools | P.104 P.104 |
| 0. 0000 | 0341030000 | Riveting tools | r.104 |

| Notes | | | |
|-------|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



At Chicago Pneumatic we have a passion for performance and long-lasting partnerships. Since 1901, we have been committed to reliability based on technology and trust.



For more information, please contact your CP channel partner:

Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.