

# Condensed Reel Catalog

**Our best selling hose, cord and cable reels**



**reelcraft.com**





# Why use hose reels?

Why use hose reels? Because they make hose handling more efficient and safer. Your hoses, cables and cords will last up to five times longer. You will improve hose management, which decreases labor costs. Your chances of injuries from tripping

hazards will decrease, which saves lost work time, medical bills and higher insurance. You also save the expense and time to replace expensive hoses, cables and cords that get run over by fork lifts and other vehicles.



Series 7000 - Photo courtesy of Sage Oil Vac

## Five reasons why hose reels add value



**Improve efficiency**  
Hoses, cable and cords are where you want/need them.



**Increase safety**  
Reduce tripping accidents and lost work time.



**Minimize leakages**  
Reduce costs of air and water leakages.



**Reduce hose wear**  
Hose and cord on reels can last up to five times longer.



**Increase productivity**  
No more tangled hoses improves efficiency.



Series 80000 - Photo courtesy of Nealco Equipment, LLC



Series 30000 - Photo courtesy of 1st Attack Engineering

**Front Cover:** L-R: Series 7000, photo courtesy of Tellus Underground Technologies, Portland, PA; Series 7000; Series 80000, photo courtesy of Sage Oil Vac, Amarillo, TX.

## OSHA says reduce your trips and falls

"There are many situations that may cause slips, trips and falls. The controls needed to prevent these hazards are usually obvious, but too often ignored, such as...coiling up extension cords, lines and hoses when not in use and

keeping electrical and other wires out of the way." OSHA's "Fall Prevention Tips" include, "Practice good housekeeping. Keep cords, welding leads and air hoses out of walkways or adjacent work areas."

Source: [www.osha.gov](http://www.osha.gov)

## Same-day quick ship program offers fastest service

Because we are centrally located in the US and have three North American warehouses, upon request, we can quickly ship our standard products the same day for domestic orders of ten or fewer standard models. Orders must be received by 1:00 pm Eastern Time. Look for the shipping icons in this catalog for designated models. For the most current list of Quick Ship reels, please visit [www.reelcraft.com](http://www.reelcraft.com).



## Two Year Limited Warranty and Return Policy

Reelcraft now offers a two-year limited warranty. All reels manufactured by Reelcraft Industries, Inc. are warranted to be free of defects due to faulty material or workmanship for 24 months from date of shipment. Exception: LD, LG, LH cord reels - 1 year; hose and light bulbs - 6 months. Normal wear and tear is not considered a defect in material or workmanship. For complete warranty information, online warranty registration and return information please visit [www.reelcraft.com](http://www.reelcraft.com) or call Reelcraft's Customer Service Department toll-free at 1-855-634-9109.

**\*Please refer to the online catalog for the most current and up-to-date product information.**



# Reelcraft's Online Interactive Catalog

## Complete Online Catalog of Products

Reelcraft's interactive catalog gives users the ability to self-select the product they need for their specific application. The products are grouped into categories by application and gives the user the choice to narrow their search by filters such as hose/cord length, drive type, reel grade, in stock items, etc. The individual product pages include all the available information for each product including:

- Product specs and dimensions
- Videos
- Quote request form
- Service manuals
- Available inventory
- Available parts and accessories
- Tech bulletins
- CAD drawings
- 360° images
- FAQs

## Parts and Accessories

The interactive catalog also contains an extensive listing of parts and accessories. Search the catalog of over 350 hose assemblies by hose I.D., length, pressure rating, or end fitting size. The catalog also contains information for the following items:

- Replacement hose assemblies
- Bumper stop assemblies
- Swing brackets
- Inlet hose assemblies
- Roller guide assemblies
- Pivot bases
- Swivel assemblies

Visit [www.reelcraft.com/catalog](http://www.reelcraft.com/catalog) to start your search!



**Easy to use!**



# Reelcraft's Online Reel Configurator

## Large Frame Reels - 1/2" to 2" ID; hose lengths to 610' and more

Reelcraft's online reel configurator quickly and accurately quotes large frame reels. Simply answer a few questions about your reel needs, submit your configuration and receive your custom quote within 1 business day. The new configurator allows for shorter lead times for large frame reels and increases the accuracy of the available combinations of reel options.



**Series 2400 Reels**  
1/2", 3/4", 1" Hose I.D.



**Series 3900 Reels**  
1", 1 1/4", 1 1/2" Hose I.D.



**Series 3700 Reels**  
2" Hose I.D.

**Fast quote time** - receive your quote in approximately 1 business day

**More accurate quotes** - eliminates incompatibilities and increases the accuracy of available combinations

**Reduced product lead time** - 2 weeks with most configured products

**Now available online!**

Don't see what you need? Reelcraft's engineered products group custom builds to your specifications, see page 15.

Visit [www.reelcraft.com/configurator](http://www.reelcraft.com/configurator) to get started!





## Medium Duty Spring Retractable Reels








### Series RT

Series RT is an economical choice for a medium duty, lighter weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a composite spool for longer service life. Guide arm adjusts to seven positions.

Made  
in USA



RT650-OLP  
Patent No. 7,150,425

Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI**	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
Low Pressure Air / Water Reels		Maximum temperature 150 °F (65 °C)    **Maximum working pressure at 70 °F (20 °C)								
RT435-OLP 	RT403-OLP	1/4	35	300	1/4	3/8	16 1/2	6 1/4	17 7/8	21
RT450-OLP 	RT405-OLP	1/4	50	300	1/4	3/8	16 1/2	6 1/4	17 7/8	24
RT635-OLP 	RT603-OLP	3/8	35	300	1/4	3/8	16 1/2	6 1/4	17 7/8	21
RT650-OLP 	RT605-OLP 	3/8	50	300	1/4	1/2	16 1/2	6 1/4	17 7/8	27
RT835-OLP 	RT803-OLP	1/2	35	300	1/2	1/2	16 1/2	6 1/4	17 7/8	27
RT850-OLP 	RT805-OLP	1/2	50	300	1/2	1/2	16 1/2	7 3/4	17 7/8	37
Medium Pressure Oil Reels		Maximum temperature 150 °F (65 °C)								
RT635-OMP	RT603-OMP	3/8	35	1000	3/8	3/8	16 1/2	6 1/4	17 7/8	30
RT650-OMP	RT605-OMP	3/8	50	1000	3/8	1/2	16 1/2	7 3/4	17 7/8	35
RT835-OMP	RT803-OMP	1/2	35	1000	1/2	1/2	16 1/2	6 1/4	17 7/8	32
High Pressure Grease Reels		Maximum temperature 150 °F (65 °C)								
RT435-OHP	RT403-OHP	1/4	35	5000	1/4	3/8	16 1/2	6 1/4	17 7/8	30
RT635-OHP	RT603-OHP	3/8	35	4800	3/8	1/2	16 1/2	6 1/4	17 7/8	34
RT650-OHP	RT605-OHP	3/8	50	4800	3/8	1/2	16 1/2	7 3/4	17 7/8	46
*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to reelcraft.com for complete listing. Bumper stop not included in models without hose.										

\*Weight of model with hose. Additional lengths available as standard, contact manufacturer or go to reelcraft.com for complete listing. Bumper stop not included in models without hose.

## Premium Duty Spring Retractable Reels

### Series 4000 / 5000 / 5005

Series 4000, 5000 and 5005 reels are durable and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. The Series 5005 reel can handle hose lengths up to 50 feet. Reels are all-steel construction and compact for different applications. Guide arm adjusts to two positions. Consult Reelcraft for other products and hoses.

















Made  
in USA



4625 OLP

5635 OLP

5650 OLP

Quiet Latch w/ Hose	Ratchet Latch w/ hose	Quiet Latch w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI**	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
								Length	Width	Height	
Low Pressure Air / Water Reels      Maximum temperature 150 °F (65 °C)      **Maximum working pressure at 70 °F (20 °C)											
4425 OLP 	B4425 OLP	4400 OLP 	1/4	25	300	1/4	3/8	12 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	12 <sup>7</sup> / <sub>8</sub>	19
4435 OLP 	B4435 OLP	4400 OLP 	1/4	35	300	1/4	3/8	12 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	12 <sup>7</sup> / <sub>8</sub>	19
5450 OLP 	B5450 OLP	5400 OLP 	1/4	50	300	1/4	3/8	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	26
4625 OLP 	B4625 OLP	4600 OLP 	3/8	25	300	1/4	3/8	12 <sup>3</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	12 <sup>7</sup> / <sub>8</sub>	20
5635 OLP 	B5635 OLP	5600 OLP 	3/8	35	300	1/4	3/8	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	25
5650 OLP 	B5650 OLP	5605 OLP 	3/8	50	300	1/4	3/8	16 <sup>1</sup> / <sub>2</sub>	5 <sup>7</sup> / <sub>8</sub>	17 <sup>5</sup> / <sub>8</sub>	36
A5825 OLP 	B5825 OLP	A5800 OLP	1/2	25	300	1/2	3/8	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	27
A5835 OLP 	B5835 OLP	A5805 OLP	1/2	35	300	1/2	3/8	16 <sup>1</sup> / <sub>2</sub>	5 <sup>7</sup> / <sub>8</sub>	17 <sup>5</sup> / <sub>8</sub>	39
A5850 OLP 	B5850 OLP	A5806 OLP	1/2	50	300	1/2	3/8	16 <sup>1</sup> / <sub>2</sub>	7 <sup>1</sup> / <sub>4</sub>	17 <sup>5</sup> / <sub>8</sub>	41
Medium Pressure Oil Reels      Maximum temperature 210 °F (99 °C)											
5435 OMP	B5435 OMP	5400 OMP	1/4	35	2750	1/4	3/8	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	31
5630 OMP	B5630 OMP	5600 OMP 	3/8	30	2600	3/8	3/8	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	31
A5835 OMP	B5835 OMP	A5805 OMP	1/2	35	3000	1/2	3/8	16 <sup>1</sup> / <sub>2</sub>	5 <sup>7</sup> / <sub>8</sub>	17 <sup>5</sup> / <sub>8</sub>	42
High Pressure Grease Reels      Maximum temperature 210 °F (99 °C)											
5435 OHP	B5435 OHP	5405 OHP	1/4	35	5000	1/4	1/4	16 <sup>1</sup> / <sub>2</sub>	5 <sup>7</sup> / <sub>8</sub>	17 <sup>5</sup> / <sub>8</sub>	39
5625 OHP	B5625 OHP	5600 OHP	3/8	25	4800	1/4	1/4	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	32
*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.											

\*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California  
Warehouses

California Warehouse

Canadian Warehouse



## Heavy Duty Spring Retractable Reels














### Series 7000

Made in USA

Reelcraft's popular Series 7000 is ideal for the most demanding industrial and commercial applications. The reel's base and guide arms are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The Series 7000 incorporates an all steel construction and a baked-on powder coat finish to produce a rugged corrosion-resistant product suitable for a wide variety of heavy duty applications.



7850 OLP

Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI**	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shgp. Wt. (lbs)
							Length	Width	Height	
Low Pressure Air / Water Reels      Maximum temperature 150 °F (65 °C)      **Maximum working pressure at 70 °F (20 °C)										
7650 OLP 	7600 OLP 	3/8	50	300	1/4	1/2	19¾	7	20¼	43
7670 OLP 	7607 OLP	3/8	70	300	1/4	1/2	19¾	7	20¼	47
7850 OLP 	7800 OLP 	1/2	50	300	3/8	1/2	19¾	7	20¼	47
7850 OLP121 	7800 OLP 	1/2	50	300	1/2	1/2	19¾	7	20¼	47
7925 OLP 	7900 OLP 	3/4	25	250	3/4	3/4	19¾	7	20¼	47
Medium Pressure Oil Reels      Maximum temperature 210 °F (99 °C)										
7850 OMP 	7800 OMP 	1/2	50	3000	1/2	1/2	19¾	7	20¼	57
High Pressure Grease Reels      Maximum temperature 210 °F (99 °C)										
7650 OHP 	7600 OHP 	3/8	50	4800	1/4	1/2	19¾	7	20¼	60
*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.										

\*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.

## Heavy Duty Spring Retractable Reels

### Series HD70000





Made in USA

Reelcraft's Series HD70000 hose reels incorporate a heavy duty base design, all steel construction and a baked-on powder coat finish to create a rugged, corrosion-resistant product. A newly redesigned latching mechanism provides longer service life of the latch components. The high quality, die cast aluminum hub and two sealed ball bearings produce a smoother spool rotation and easier operation.

- **Compact design** - Reels are 25% smaller than our heavy duty Series 80000 reels.
- **Guide rollers** - The one piece design and stainless steel pins offer greater strength and easier serviceability.
- **Versatility** - The guide arm adjusts to seven different positions for versatile mounting.
- **Drive spring** - The containerized drive spring offers easier handling during maintenance. (8 1/4" wide models only)



HD76100 OLP

Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI**	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
Low Pressure Air / Water Reels      Maximum temperature 150 °F (65 °C)    **Maximum working pressure at 70 °F (20 °C)										
HD76050 OLP	HD76000 OLP	3/8	50	300	1/4	1/2	19¾	7	20¼	45
HD76070 OLP	HD76000 OLP	3/8	70	300	1/4	1/2	19¾	7	20¼	49
HD76075 OLP 	HD76005 OLP	3/8	75	300	1/4	1/2	19¾	8¼	20¼	65
HD76100 OLP 	HD76005 OLP	3/8	100	300	1/4	1/2	19¾	8¼	20¼	75
HD78050 OLP 	HD78000 OLP	1/2	50	300	3/8	1/2	19¾	7	20¼	49
HD78075 OLP 	HD78005 OLP	1/2	75	300	3/8	1/2	19¾	8¼	20¼	73
HD79025 OLP	HD79000 OLP	3/4	25	250	3/4	3/4	19¾	7	20¼	49
Medium Pressure Oil Reels      Maximum temperature 210 °F (99 °C)										
HD76050 OMP	HD76000 OMP	3/8	50	2600	3/8	1/2	19¾	7	20¼	57
HD76075 OMP	HD76005 OMP	3/8	75	2600	3/8	1/2	19¾	8¼	20¼	85
HD78050 OMP	HD78000 OMP	1/2	50	3000	1/2	1/2	19¾	7	20¼	59
HD78065 OMP	HD78005 OMP	1/2	65	3000	1/2	1/2	19¾	8¼	20¼	78
High Pressure Grease Reels      Maximum temperature 210 °F (99 °C)										
HD74050 OHP	HD74000 OHP	1/4	50	5000	1/4	1/2	19¾	7	20¼	57
HD74075 OHP	HD74005 OHP	1/4	75	5000	1/4	1/2	19¾	8¼	20¼	80
HD74100 OHP	HD74005 OHP	1/4	100	5000	1/4	1/2	19¾	8¼	20¼	86
HD76050 OHP	HD76000 OHP	3/8	50	4800	1/4	1/2	19¾	7	20¼	62
HD76075 OHP	HD76005 OHP	3/8	75	4800	1/4	1/2	19¾	8¼	20¼	90
*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.										

\*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse Indiana & California Warehouses California Warehouse Canadian Warehouse




## Heavy Duty Dual Pedestal Reels

### Series DP5000 / DP7000 / 80000

Reelcraft's new compact Series DP5000 and DP7000 features our innovative interlocking base design, which makes the base assembly especially strong and resistant to vibration. The base and guide arm on all dual pedestal reels is structurally reinforced. The all-steel construction and baked-on powder coat finish combine to produce a rugged, corrosion-resistant product.

Made  
in USA

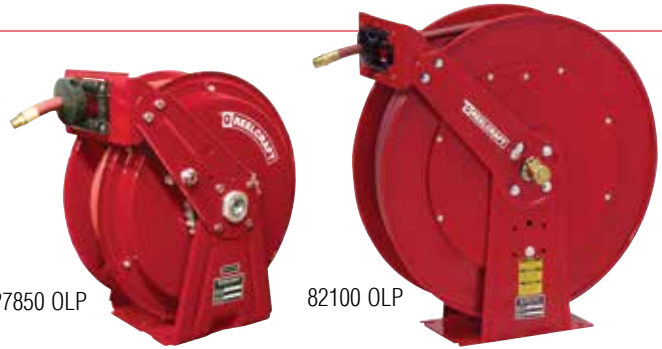

Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI**	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
<b>Low Pressure Air / Water Reels</b> Maximum temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)										
DP5435 OLP	DP5400 OLP	1/4	35	300	1/4	1/2	14 <sup>3</sup> / <sub>8</sub>	8	16 <sup>3</sup> / <sub>8</sub>	34
DP5450 OLP	DP5400 OLP	1/4	50	300	1/4	1/2	14 <sup>3</sup> / <sub>8</sub>	8	16 <sup>3</sup> / <sub>8</sub>	37
DP7450 OLP	DP7400 OLP	1/4	50	300	1/4	1/2	16 <sup>1</sup> / <sub>2</sub>	8	17	46
DP5635 OLP	DP5600 OLP	3/8	35	300	1/4	1/2	14 <sup>3</sup> / <sub>8</sub>	8	16 <sup>3</sup> / <sub>8</sub>	41
DP5650 OLP	DP5600 OLP	3/8	50	300	1/4	1/2	14 <sup>3</sup> / <sub>8</sub>	9	16 <sup>3</sup> / <sub>8</sub>	44
DP7650 OLP	DP7600 OLP	3/8	50	300	1/4	1/2	16 <sup>1</sup> / <sub>2</sub>	8	17	50
81100 OLP	81000 OLP	3/8	100	300	3/8	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	82
DP5835 OLP	DP5800 OLP	1/2	35	300	3/8	1/2	14 <sup>3</sup> / <sub>8</sub>	9	16 <sup>3</sup> / <sub>8</sub>	52
DP7850 OLP	DP7800 OLP	1/2	50	300	3/8	1/2	16 <sup>1</sup> / <sub>2</sub>	9	17	53
82075 OLP	82000 OLP	1/2	75	300	1/2	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	87
82100 OLP	82000 OLP	1/2	100	300	1/2	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	95
83050 OLP	83000 OLP	3/4	50	250	3/4	3/4	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	88
D83075 OLP	D83000 OLP	3/4	75	250	3/4	3/4	24	14 <sup>1</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>8</sub>	102
D84050 OLP	D84000 OLP	1	50	250	3/4	1	24	15 <sup>1</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>8</sub>	103
<b>Medium Pressure Oil Reels</b> Maximum temperature 210 °F (99 °C)										
DP7650 OMP	DP7600 OMP	3/8	50	2600	3/8	1/2	16 <sup>1</sup> / <sub>2</sub>	8	17	55
DP5835 OMP	DP5800 OMP	1/2	35	3000	1/2	1/2	14 <sup>3</sup> / <sub>8</sub>	9	16 <sup>3</sup> / <sub>8</sub>	54
DP7850 OMP	DP7800 OMP	1/2	50	3000	1/2	1/2	16 <sup>1</sup> / <sub>2</sub>	9	17	64
82075 OMP	82000 OMP	1/2	75	2000	1/2	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	101
83050 OMP	83000 OMP	3/4	50	1250	3/4	3/4	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	98
<b>High Pressure Grease Reels</b> Maximum temperature 210 °F (99 °C)										
DP7450 OHP	DP7400 OHP	1/4	50	5000	1/4	1/2	16 <sup>1</sup> / <sub>2</sub>	8	17	59
DP5635 OHP	DP5600 OHP	3/8	35	4800	1/4	1/2	14 <sup>3</sup> / <sub>8</sub>	9	16 <sup>3</sup> / <sub>8</sub>	43
DP7650 OHP	DP7600 OHP	3/8	50	4800	1/4	1/2	16 <sup>1</sup> / <sub>2</sub>	8	17	65
81075 OHP	81000 OHP	3/8	75	4800	3/8	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	111
81100 OHP	81000 OHP	3/8	100	4800	3/8	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	127

\*Weight of model with hose. Mounts to floor, wall, ceiling or vehicle. Bumper stop not included in models without hose.

## Spring Retractable Vehicle-Mount Reels

### Series D9000

Series D9000 reels offer the greatest amount of stability for high volume air or water. This rugged reel is ideal for portable service trucks, permanent service or plant work areas. The durable baked-on, powder coat finish provides a high quality, ultra-violet radiation (sunlight), weather and chip-resistant finish that will stay bright through years of use.

Made  
in USA



Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI**	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
<b>Low Pressure Air / Water Reels</b> Maximum temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)										
D9299 OLPBW	D9205 OLPBW	1/2	100	300	1/2	1/2	26 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>4</sub>	26 <sup>3</sup> / <sub>8</sub>	127
D9350 OLPBW	D9300 OLPBW	3/4	50	250	3/4	3/4	26 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>4</sub>	26 <sup>3</sup> / <sub>8</sub>	140
D9375 OLPBW	D9300 OLPBW	3/4	75	250	3/4	3/4	26 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>4</sub>	26 <sup>3</sup> / <sub>8</sub>	152
D9399 OLPBW	D9305 OLPBW	3/4	100	250	3/4	3/4	26 <sup>1</sup> / <sub>4</sub>	17 <sup>7</sup> / <sub>8</sub>	26 <sup>3</sup> / <sub>8</sub>	143
D9450 OLPBW	D9400 OLPBW	1	50	250	3/4	1	26 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>4</sub>	26 <sup>3</sup> / <sub>8</sub>	157

\*Weight of model with hose. Medium and high pressure available as standard, contact manufacturer or go to reelcraft.com for complete list. Bumper stop not included in models without hose.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

🏠 Indiana Warehouse

🚚 Indiana & California  
Warehouses

🏡 California Warehouse

🇨🇦 Canadian Warehouse





## Spring Retractable Low Profile Reels Series SD10000

Reelcraft new Series SD10000 hose reels are designed to facilitate larger diameter 3/4" and 1" hose up to 50 ft. They feature a high quality external drive spring and a heavy gauge all-bolted together frame. This is the most compact reel in its class, making it ideal for mounting in truck cabinets or other areas where space is limited.

Made  
in USA

SD13050 OLP



Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI***	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
Low Pressure Air / Water Reels		Maximum temperature 150 °F (65 °C) ***Maximum working pressure at 70 °F (20 °C)								
SD13035 OLP	SD13000 OLP	3/4	35	300	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	95
SD13050 OLP	SD13000 OLP	3/4	50	300	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	105
SD14035 OLP	SD14000 OLP	1	35	300	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	102
SD14050 OLP	SD14005 OLP	1	50	300	3/4	1	19 <sup>1</sup> / <sub>8</sub>	20 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	125
Medium Pressure Oil Reels		Maximum temperature 210 °F (99 °C)								
SD13050 OMP	SD13000 OMP	3/4	50	1250	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	105
Vacuum Recovery Reels		Maximum temperature 210 °F (99 °C)								
SD13035 OVP	SD13000 OVP	3/4	35	28 Hg~300 psi	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	95
SD13050 OVP	SD13000 OVP	3/4	50	28 Hg~300 psi	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	105
SD14035 OVP	SD14000 OVP	1	35	28 Hg~300 psi	1	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	102
SD14050 OVP	SD14005 OVP	1	50	28 Hg~300 psi	1	1	19 <sup>1</sup> / <sub>8</sub>	20 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	125
Low Pressure Fuel Reels		Maximum temperature 150 °F (65 °C) with hose or 210 °F (99 °C) without hose								
FSD13035 OLP	FSD13000 OLP	3/4	35	**50	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	102
FSD13050 OLP	FSD13000 OLP	3/4	50	**50	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	110
FSD14035 OLP	FSD14000 OLP	1	35	**50	1	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	105
FSD14050 OLP	FSD14005 OLP	1	50	**50	1	1	19 <sup>1</sup> / <sub>8</sub>	20 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	127
*Weight of model with hose. **Models equipped with UL330 and ULC approved fuel grade hose. 250 PSI minimum burst. <b>NOTE:</b> Vacuum recovery reel capacities based on SAE 100 R4 hose or equivalent. Maximum O.D. is 1.50". Bumper stop not included in models without hose.										

\*Weight of model with hose. \*\*Models equipped with UL330 and ULC approved fuel grade hose. 250 PSI minimum burst. **NOTE:** Vacuum recovery reel capacities based on SAE 100 R4 hose or equivalent. Maximum O.D. is 1.50". Bumper stop not included in models without hose.

## Dual Hydraulic Spring Retractable Reels Series TH

Reelcraft's hydraulic reels are used for medium pressure dual hydraulic hose applications and are ideal for operating hydraulic cylinders, tools and equipment. Reelcraft's Series TH reels incorporate contemporary engineering and manufacturing techniques for trouble-free performance. Reels are all steel construction and compact for applications with critical space requirements.

Made  
in USA

TH88050 OMP



Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
TH5425 OMP	TH5400 OMP	1/4	25	2000	1/4	1/4	14	6 1/8	14 3/8	34
TH7445 OMP	TH7400 OMP	1/4	45	2000	1/4	1/4	19 3/4	7 3/4	20 1/4	60
THA7630 OMP	THA7600 OMP	3/8	30	2000	3/8	3/8	19 3/4	7 3/4	20 1/4	53
TH86050 OMP	TH86000 OMP	3/8	50	2000	3/8	3/8	24	12 7/8	25 3/8	99
TH88050 OMP	TH88000 OMP	1/2	50	2000	1/2	1/2	24	12 7/8	25 3/8	104
TH9265 OMPBW	TH9200 OMPBW	1/2	65	2000	1/2	1/2	26 1/4	21 1/2	26 3/8	155

\*Weight of model with hose. Maximum temperature 210 °F (99 °C). Bumper stop not included in models without hose.

## Accessories

Reels ordered with hose and bumper are assembled complete and ready to install. Order bumpers separately for reels without hoses. Mounting brackets, roller guides, motors and other accessories are also available. Please visit our website or call for assistance. Visit [reelcraft.com/accessories](http://reelcraft.com/accessories) for a complete list of available items.



Swing Bracket  
600626



Air / Water Hose Assembly  
S601022-50



Hose Bumper  
3-HR1004-3

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California  
Warehouses

California Warehouse

Canadian Warehouse



## Heavy Duty Pressure Wash Reels









### Series 30000 / H18006 / PW

Compact design and quality steel construction are incorporated into Reelcraft's newest line of pressure wash reels. These reels are able to carry up to 300 feet of hose and are complete with a high pressure swivel for maximum product delivery. The swivel is designed to handle a broad range of pressures, temperatures and chemicals.



PW81000 OHP



Model w/o Hose	Model w/ Hose	Hose I.D. (in)	Hose Capacity (ft)	Max PSI*	NPT(F) Reel Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			Shpg. Wt. (lbs)
							Length	Width	Height	
Hand Crank Reels Maximum temperature 400 °F (200 °C)										
H18006 M 	-----	3/8	100	5000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	13 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>8</sub>	31
CA38106 M 	-----	3/8	140	5000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	19 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	41
CA38112 M 	-----	3/8	300	5000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	46
Spring Driven Reels Maximum temperature 400 °F (200 °C)										
PW7600 OHP 	PW7650 OHP*  	3/8	50	5000	3/8	1/2	19 <sup>3</sup> / <sub>4</sub>	7	20 <sup>1</sup> / <sub>4</sub>	43
PWD76005 OHP	PWD76075 OHP*	3/8	75	5000	3/8	1/2	19 <sup>3</sup> / <sub>4</sub>	8 <sup>1</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	50
PW81000 OHP  	-----	3/8	100	5000	3/8	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	86
*Maximum temperature 212 °F (100 °C) and maximum pressure 4800 PSI. Hose outlet is 1/4" NPT(M). Bumper stop not included in models without hose.										

\*Maximum temperature 212 °F (100 °C) and maximum pressure 4800 PSI. Hose outlet is 1/4" NPT(M). Bumper stop not included in models without hose.

## Static Discharge/Grounding Reels

### Series G

Spring retractable static discharge reels are used to ground equipment operating in hazardous atmospheres, such as fuel trucks or carts transferring flammable materials. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reduces chances of sparking and the potential for explosion. Clamp rated at 100 Amps on all models listed.

**NEW!**

GS3050



G 3050

Model	Cable Length (ft)	Description	Reel Dimensions (in)			Shpg. Wt. (lbs)
			Length	Width	Height	
G 3050	50	Single 7 x 7 stranded steel cable	8 <sup>5</sup> / <sub>8</sub>	3 <sup>3</sup> / <sub>8</sub>	8 <sup>7</sup> / <sub>8</sub>	12
GS3050**	50	Single 7 x 7 stranded stainless steel cable	8 <sup>5</sup> / <sub>8</sub>	3 <sup>3</sup> / <sub>8</sub>	8 <sup>7</sup> / <sub>8</sub>	12
G 3050 N	50	Nylon covered cable	8 <sup>5</sup> / <sub>8</sub>	3 <sup>3</sup> / <sub>8</sub>	8 <sup>7</sup> / <sub>8</sub>	12
G 3050 Y	50	Steel cable splits in 2 @ 15ft	8 <sup>5</sup> / <sub>8</sub>	3 <sup>3</sup> / <sub>8</sub>	8 <sup>7</sup> / <sub>8</sub>	12
GA3100 N	100	Hi-vis orange nylon covered cable	9 <sup>1</sup> / <sub>4</sub>	3 <sup>3</sup> / <sub>4</sub>	9 <sup>3</sup> / <sub>4</sub>	16
GHC3100 N*	100	Hi-vis orange nylon covered cable	9 <sup>1</sup> / <sub>4</sub>	5 <sup>1</sup> / <sub>4</sub>	9 <sup>3</sup> / <sub>4</sub>	12

\*Hand crank rewind model \*\*Stainless steel model

## Fuel Delivery Reels










### Series F7000 / FD9000 / F80000 / FD80000 / FSD10000

Reelcraft's spring retractable fuel delivery reels, equipped with Viton® seals, incorporate metal forms to insure the greatest possible strength and are ideal for mobile applications. These rugged, corrosion-resistant reels are suitable for a wide variety of fuel applications. All models listed are supplied with our ball-bearing style swivel.



F7925 OLP



Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Length (ft)	Max PSI	NPT(M) Hose Outlet (in)	NPT(F) Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
Low Pressure Fuel Reels      Maximum temperature 150 °F (65 °C) with hose or 210 °F (99 °C) without hose.										
F7925 OLP 	F7900 OLP	3/4	25	**50	3/4	3/4	19 <sup>3</sup> / <sub>4</sub>	7	20 <sup>1</sup> / <sub>4</sub>	47
F83050 OLP 	F83000 OLP 	3/4	50	**50	3/4	3/4	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	89
FD83075 OLP	FD83000 OLP 	3/4	75	**50	3/4	3/4	24	13	25 <sup>3</sup> / <sub>8</sub>	115
FD84050 OLP 	FD84000 OLP  	1	50	**50	1	1	24	15 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>8</sub>	115
FD9350 OLPBW	FD9300 OLPBW	3/4	50	**50	3/4	3/4	26 <sup>1</sup> / <sub>4</sub>	12	26 <sup>3</sup> / <sub>8</sub>	140
FD9450 OLPBW 	FD9400 OLPBW 	1	50	**50	1	1	26 <sup>1</sup> / <sub>4</sub>	12	26 <sup>3</sup> / <sub>8</sub>	157
FSD13035 OLP	FSD13000 OLP	3/4	35	**50	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	102
FSD13050 OLP	FSD13000 OLP	3/4	50	**50	3/4	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	110
FSD14035 OLP	FSD14000 OLP	1	35	**50	1	1	19 <sup>1</sup> / <sub>8</sub>	18 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	105
FSD14050 OLP	FSD14005 OLP	1	50	**50	1	1	19 <sup>1</sup> / <sub>8</sub>	20 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	127
*Weight of model with hose. **Models equipped with UL330 and ULC approved fuel grade hose. 250 PSI minimum burst. Bumper stop not included in models without hose.										

\*Weight of model with hose. \*\*Models equipped with UL330 and ULC approved fuel grade hose. 250 PSI minimum burst. Bumper stop not included in models without hose.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse





## Potable (Drinking Water) and Pre-Rinse Reels

### Series 5000

Reelcraft's potable (drinking) water reels feature a full-flow stainless steel shaft and PVC swivel and convenient fast hook-up and disconnect. Pre-rinse reels are crafted for use in commercial establishments such as restaurants and institutions. A standard lever-operated spray valve is included.

Made in USA



5635 OLPSW5

A5835 OLBSW23

Model w/ Hose	Hose I.D. (in.)	Hose Length (ft.)	Max PSI	NPT(M) Hose Outlet (in.)	NPT(F) Reel Inlet (in.)	Reel Dimensions (in.)			Shpg. Wt. (lbs.)
						Length	Width	Height	
A5835 OLBSW23	1/2	35	150	3/4 Garden Hose (F)	1/2 male	14	6 1/8	14 3/8	28
5635 OLPSW5	3/8	35	250	Spray Valve	3/8	14	6 1/8	14 3/8	27
5635 ELPSW5**	3/8	35	250	Spray Valve	3/8	16 1/4	7	15	37
5635 OLSSW5*	3/8	35	250	Spray Valve	3/8	14	6 1/8	14 3/8	28
600248	360° swivel (place between hose and nozzle) on spray valve type								0.5

\*Stainless steel reel \*\*Enclosed spool

## Light Duty Hand Crank Hose Reels

### Series C














Reelcraft's Series C hose reels are designed for lighter-duty applications that require longer lengths of hose. Series C hand crank reels include a balanced brass swivel and brass inlet.



CU6100LN



CT6050HN

Model w/o Hose	Hose I.D. (in.)	Hose Length (ft.)	Max PSI	NPT(F) Reel Outlet (in.)	NPT(F) Reel Inlet (in.)	Reel Dimensions (in.)			Shpg. Wt. (lbs.)
						Length	Width	Height	
Low Pressure Air / Water Reels    Maximum temperature 150 °F (65 °C)									
CU6050LN 	3/8	50	300	3/8	3/8	10 <sup>1</sup> / <sub>2</sub>	16 <sup>3</sup> / <sub>4</sub>	11 <sup>1</sup> / <sub>2</sub>	11
CU6100LN 	3/8	100	300	3/8	3/8	10 <sup>1</sup> / <sub>2</sub>	20 <sup>1</sup> / <sub>8</sub>	11 <sup>1</sup> / <sub>2</sub>	16
CT6050LN 	3/8	50	300	1/2	1/2	13 <sup>1</sup> / <sub>4</sub>	15 <sup>1</sup> / <sub>2</sub>	15 <sup>5</sup> / <sub>8</sub>	13
CT6100LN 	3/8	100	300	1/2	1/2	13 <sup>1</sup> / <sub>4</sub>	19 <sup>1</sup> / <sub>2</sub>	15 <sup>5</sup> / <sub>8</sub>	20
CU8050LN 	1/2	50	300	1/2	1/2	13 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>4</sub>	14 <sup>3</sup> / <sub>8</sub>	13
CU8100LN 	1/2	100	300	1/2	1/2	13 <sup>1</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	17
CT8050LN 	1/2	50	300	1/2	1/2	13 <sup>1</sup> / <sub>4</sub>	15 <sup>1</sup> / <sub>2</sub>	15 <sup>5</sup> / <sub>8</sub>	13
CT8100LN 	1/2	100	300	1/2	1/2	13 <sup>1</sup> / <sub>4</sub>	19 <sup>1</sup> / <sub>2</sub>	15 <sup>5</sup> / <sub>8</sub>	17
High Pressure Wash Reels    Maximum temperature 210 °F (99 °C)									
CT6050HN 	3/8	50	5000	3/8	1/2	13 <sup>1</sup> / <sub>4</sub>	15 <sup>1</sup> / <sub>2</sub>	15 <sup>5</sup> / <sub>8</sub>	13
CT6100HN 	3/8	100	5000	3/8	1/2	13 <sup>1</sup> / <sub>4</sub>	19 <sup>1</sup> / <sub>2</sub>	15 <sup>5</sup> / <sub>8</sub>	17
CTJ6200HN 	3/8	200	5000	3/8	1/2	16	19 <sup>7</sup> / <sub>8</sub>	19 <sup>7</sup> / <sub>8</sub>	28
CM6050HN 	3/8	50	5000	3/8	1/2 (M)	13 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	14
CM6100HN 	3/8	100	5000	3/8	1/2 (M)	13 <sup>1</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>2</sub>	13 <sup>1</sup> / <sub>4</sub>	18

Hose not included. Hose assemblies will be quoted upon request.

## Medium Duty Hand Crank Reels





### Series H

Reelcraft's Series H is an economical reel designed for medium duty applications requiring long lengths of hose. It is equally suited for plant or field use such as turf care, pest control, steam cleaning and more. Shipped completely assembled, ready to install.

Made in USA



H18000 M

Model w/o Hose	Hose I.D. (in.)	Hose Capacity (ft.)	Max PSI	NPT(F) Reel Outlet (in.)	NPT(F) Reel Inlet (in.)	Reel Dimensions (in.)			Shpg. Wt. (lbs.)
						Length	Width	Height	
Low Pressure Air / Water Reels    Maximum temperature 150 °F (65 °C)									
H16000 	3/8	300	500	1/4	3/8	20	18 <sup>1</sup> / <sub>4</sub>	19	32
H18000 	1/2	200	1000	1/2	1/2	20	18 <sup>1</sup> / <sub>4</sub>	19	34
H19000 	3/4	90	1000	3/4	3/4	20	18 <sup>1</sup> / <sub>4</sub>	19	33
Medium Pressure Oil Reels    Maximum temperature 210 °F (99 °C)									
H18000 M 	1/2	200	3000	1/2	1/2	20	18 <sup>1</sup> / <sub>4</sub>	19	34
H29000 M	3/4	150	3000	3/4	3/4	20	24 <sup>1</sup> / <sub>4</sub>	19	35
Hose not included. Many sizes not listed available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.									

Hose not included. Many sizes not listed available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse Indiana & California Warehouses California Warehouse Canadian Warehouse



## Heavy Duty for Long Hose Lengths









### Series 30000

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity.



CA33112 L



Model w/o Hose	Hose I.D. (in.)	Hose Capacity (ft.)	Max PSI	NPT(F) Reel Outlet (in.)	NPT(F) Reel Inlet (in.)	Reel Dimensions (in.)			Shpg. Wt. (lbs.)
						Length	Width	Height	
Heavy Duty Hand Crank Reels									
CA32106 L 	1/2	100	1000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	19 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	40
CA32112 L 	1/2	200	1000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	46
CA32118 L 	1/2	325	1000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	31 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	51
CA33106 L 	3/4	50	1000	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	19 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	41
CA33112 L 	3/4	100	1000	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	46
CA33118 L 	3/4	175	1000	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	31 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	51
CH37118 L	1	100	1000	1	1	17 <sup>3</sup> / <sub>4</sub>	31 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	54
CA32106 M 	1/2	100	3000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	19 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	42
CA32112 M 	1/2	200	3000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	46
CA32118 M	1/2	325	3000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	31 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	52
CA33112 M	3/4	100	3000	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	47
CA33118 M	3/4	175	3000	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	31 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	51
Motor Driven Reels - 12 V DC (24 V DC, 115 V AC, air and hydraulic motors available as standard)									
EA32118 L12D	1/2	325	1000	1/2	1/2	17 <sup>3</sup> / <sub>4</sub>	29 <sup>5</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>4</sub>	68
EA33112 L12D	3/4	100	1000	3/4	3/4	17 <sup>3</sup> / <sub>4</sub>	29 <sup>5</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>4</sub>	71

Hose not included. Many sizes not listed available as standard, contact manufacturer or go to reelcraft.com for master catalog listing.

## Corrosion-Resistant Reels

### Stainless Steel Series

Stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial solvent handling. Swivels include Viton® O-rings.

LC607 OLS



Model w/o Hose	Model w/o Hose SS Latch Parts	Hose I.D. (in.)	Hose Length (ft.)	Max PSI	NPT(F) Reel Outlet (in.)	NPT(F) Reel Inlet (in.)	Reel Dimensions (in.)			Shpg. Wt. (lbs)
							Length	Width	Height	
5600 OLS	5600 OLS-S	3/8	35	500	3/8	3/8	14	6 <sup>1</sup> / <sub>8</sub>	14 <sup>3</sup> / <sub>8</sub>	22
LC607 OLS**	-----	3/8	70	300	1/4	1/4	19 <sup>3</sup> / <sub>8</sub>	8 <sup>1</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>2</sub>	35
LC800 OLS**	-----	1/2	50	300	1/2	1/2	19 <sup>3</sup> / <sub>8</sub>	8 <sup>1</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>2</sub>	33
7800 OLS	7800 OLS-S	1/2	50	500	1/2	1/2	19 <sup>3</sup> / <sub>4</sub>	7	20 <sup>1</sup> / <sub>4</sub>	41
82000 OLS	82000 OLS-S	1/2	100	500	1/2	1/2	24	10 <sup>1</sup> / <sub>2</sub>	25 <sup>3</sup> / <sub>8</sub>	81
D83000 OLS	D83000 OLS-S	3/4	75	500	3/4	3/4	24	13	25 <sup>3</sup> / <sub>8</sub>	84
D9300 OLSBW	D9300 OLSBW-S	3/4	75	500	3/4	3/4	26 <sup>1</sup> / <sub>4</sub>	16 <sup>3</sup> / <sub>4</sub>	26 <sup>3</sup> / <sub>8</sub>	116
D84000 OLS	D84000 OLS-S	1	50	500	1	1	24	15 <sup>3</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>8</sub>	92
HS18000 M*	HS18000 M-S*	1/2	200	3000	1/2	1/2	20	18 <sup>1</sup> / <sub>4</sub>	19	36

Maximum temperature 210 °F. Hose and bumper not included. \*Hand crank rewind. \*\*Maximum temperature 150 °F.





## Air/Water/Chemical Delivery Reels

### Series S

Series S reels are economical, lighter weight and easy to handle. The reels are made of a corrosion-proof, composite polypropylene outer case with solid brass swivel and fluid path.

SHA3850 OLP



Model w/ Hose	Hose I.D. (in.)	Hose Length (ft.)	Max PSI	NPT(M) Hose Outlet (in.)	NPT(F) Reel Inlet (in.)	Reel Dimensions (in.)			Shpg. Wt. (lbs)
						Length	Width	Height	
Air* / Water* Reels Working temperature 150 °F (65 °C)									
SGA3650 OLP  	3/8	50	240	3/8	3/8	22	9 <sup>1</sup> / <sub>8</sub>	19 <sup>3</sup> / <sub>8</sub>	21
SGA3665 OLP	3/8	66	240	3/8	3/8	22	9 <sup>1</sup> / <sub>8</sub>	19 <sup>3</sup> / <sub>8</sub>	25
SGA3850 OLP 	1/2	50	240	1/2	1/2	22	9 <sup>1</sup> / <sub>8</sub>	19 <sup>3</sup> / <sub>8</sub>	23
Water Reel Garden-style hose end. Working temperature 150 °F (65 °C)									
SWA3850 OLP 	5/8	50	100	3/4 NH	1/2	22	9 <sup>1</sup> / <sub>8</sub>	19 <sup>3</sup> / <sub>8</sub>	23
Hot Water Wash Reel Working temperature 185 °F (85 °C); working pressure is related to working temperature.									
SHA3850 OLP	1/2	50	240	1/2	1/2	22	9 <sup>1</sup> / <sub>8</sub>	19 <sup>3</sup> / <sub>8</sub>	22
Hose included. *Air hose can be used for water on these models.									

Hose included. \*Air hose can be used for water on these models.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse



## Gas Welding Reels

### Series TW / BA

Series TW and BA have an independent dual swivel body manufactured from aluminum and hard coated for wear resistance to assure positive separation of gases. Double-sealed, special molded O-rings prevent leakage. Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation.

### Safe-T-Reel Series: Hand Crank












Safe-T-Reels feature a high rigidity due to a one inch shaft with tapered roller bearings. These reels are compact and flexible and made of non-conductive materials.



Safe-T-Reel  
T-1225-04  
Hose not included

TW7450 OLP

BA36106 LT

Model w/ Hose	Model w/o Hose	Hose I.D. (in)	Hose Capacity (ft)	Max PSI	Hose / Reel Outlet (in)	Reel Inlet (in)	Reel Dimensions (in)			*Shpg. Wt. (lbs)
							Length	Width	Height	
Oxygen / Acetylene Hose Reels      Maximum temperature 150 °F (65 °C)										
TW5425 OLP 	TW5400 OLP	1/4	25	200	9/16-18 (F)	1/4 NPT(F)	13 <sup>3</sup> / <sub>4</sub>	6	14 <sup>1</sup> / <sub>2</sub>	26
TW7450 OLP  	TW7400 OLP 	1/4	50	200	9/16-18 (F)	1/4 NPT(F)	19 <sup>3</sup> / <sub>4</sub>	7 <sup>3</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>4</sub>	50
TW7460 OLP	TW7400 OLP 	1/4	60	200	9/16-18 (F)	1/4 NPT(F)	19 <sup>3</sup> / <sub>4</sub>	7 <sup>3</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>4</sub>	55
Welding Gas (T-Grade) Hose Reels      Maximum temperature 150 °F (65 °C)										
TW5425 OLPT 	TW5400 OLPT	1/4	25	200	9/16-18 (F)	1/4 NPT(F)	13 <sup>3</sup> / <sub>4</sub>	6	14 <sup>1</sup> / <sub>2</sub>	26
TW7450 OLPT 	TW7400 OLPT	1/4	50	200	9/16-18 (F)	1/4 NPT(F)	19 <sup>3</sup> / <sub>4</sub>	7 <sup>3</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>4</sub>	50
TW7460 OLPT	TW7400 OLPT	1/4	60	200	9/16-18 (F)	1/4 NPT(F)	19 <sup>3</sup> / <sub>4</sub>	7 <sup>3</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>4</sub>	55
TW84100 OLPT  	TW84000 OLPT	1/4	100	200	9/16-18 (F)	9/16-18 (M)	24	12 <sup>1</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>8</sub>	101
TW86075 OLPT 	TW86000 OLPT	3/8	75	200	9/16-18 (F)	9/16-18 (M)	24	12 <sup>1</sup> / <sub>4</sub>	25 <sup>3</sup> / <sub>8</sub>	99
-----	BA36106 LT**	1/4	125	200	9/16-18 (M)	1/4 NPT(F)	25 <sup>5</sup> / <sub>8</sub>	15 <sup>5</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>2</sub>	50
-----	BA36112 LT**	1/4	250	200	9/16-18 (M)	1/4 NPT(F)	25 <sup>5</sup> / <sub>8</sub>	21 <sup>5</sup> / <sub>8</sub>	20 <sup>1</sup> / <sub>2</sub>	57
-----	T-1225-04** 	1/4	150	200	9/16-18 (M)	9/16-18 (M)	18	16 <sup>1</sup> / <sub>4</sub>	19	19

\*Weight of model with hose. \*\*Hand crank rewind. Bumper stop not included in models without hose.

## Cable Welding Reels

### Series WC / CEA

Series WC and CEA are designed to increase the safety in the work area with a resulting increase in efficiency and productivity. They have a continuous current path through a live 400 or 700 AMP, 90 V DC (maximum) rated enclosed slip ring.

### Safe-T-Reel Series: Hand Crank

Safe-T-Reels are ideal for applications where space, weight and flexibility are key. These reels are designed for manual winding of welding cables. Suitable for outdoor use.



WC7000

#### CAUTION:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up.

CEA30006

T-2464-0

Model w/o Cable	Cable Capacity (ft.)						Amps	Style	Reel Dimensions (in)			Shpg. Wt. (lbs)
	#2	#1	#1/0	#2/0	#3/0	#4/0			Length	Width	Height	
WC7000	----	50	50	50	----	----	400	Spring Driven	19	13 <sup>1</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	58
WCH7000	----	----	----	----	50	50	700	Spring Driven	19	14	20 <sup>1</sup> / <sub>4</sub>	58
WC80001	----	75	75	75	----	----	400	Spring Driven	24	16	25 <sup>3</sup> / <sub>8</sub>	102
WC80002	----	100	----	----	----	----	400	Spring Driven	24	16	25 <sup>3</sup> / <sub>8</sub>	104
WCH80001	----	----	----	----	75	75	700	Spring Driven	24	16	25 <sup>3</sup> / <sub>8</sub>	102
CEA30006*	300	250	200	150	----	----	400	Single Hand Crank	19 <sup>3</sup> / <sub>8</sub>	21	20 <sup>1</sup> / <sub>4</sub>	46
CEA30012*	500	500	400	300	----	----	400	Single Hand Crank	19 <sup>3</sup> / <sub>8</sub>	27	20 <sup>1</sup> / <sub>4</sub>	54
T-1460-0*	----	250	200	200	----	----	250	Single Hand Crank	18	16 <sup>1</sup> / <sub>4</sub>	19	32
T-2462-0*	----	250	200	200	----	----	250	Dual Hand Crank/ Side-by-Side	18	29	19	51
T-2464-0*	----	250	200	200	----	----	250	Dual Hand Crank/ Stacked	18	16 <sup>1</sup> / <sub>4</sub>	38	62

Cable not included. \*Hand crank rewind. Bumper stop not included in models without cable. Series WC and CEA are for indoor non-weather tight applications only.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse Indiana & California Warehouses California Warehouse Canadian Warehouse





## Light Duty Portable Cord Reels

### Series LH

Designed with the contractor in mind, Series LH medium duty hand crank reels are portable and deliver power where and when it is necessary. They feature four circuit breaker protected outlets and a corrosion resistant powder coating.



LH3100



LH2080 143



Model w/ Cord	Accessory	Reel Capabilities				Reel Dimensions (in)			Volts	Amps	Shpg. Wt (lbs)
		Length (ft)	# Cond	AWG	Type	Length	Width	Height			
LH2080 143	4 Outlets	80	3	14	SJTW	11	8 <sup>3</sup> / <sub>4</sub>	13 <sup>3</sup> / <sub>4</sub>	125	10	15
LH3100*	4 Outlets	100	3	10	STW	17 <sup>1</sup> / <sub>4</sub>	11 <sup>1</sup> / <sub>8</sub>	17 <sup>3</sup> / <sub>4</sub>	125	15	13

\*Does not include cord

## Light/Medium Duty Cord Reels

### Series LD / LG \*1 year warranty

Reelcraft's new line of light and medium duty cord reels are designed for less strenuous applications in which a capable and long-lasting reel is required. These reels accommodate lengths of 16/3, 14/3 and 12/3 diameter cable.












LD2040 163 2



LG3050 143 9



Model w/ Cord	Accessory	Reel Capabilities				Reel Dimensions (in)			Volts	Amps	Shpg. Wt (lbs)
		Length (ft)	# Cond	AWG	Type	Length	Width	Height			
Power Cord Reels											
LD2030 163 9* 	Triple receptacle	30	3	16	SJTW	9 1/4	3 3/4	11 7/8	125	10	8
LD2030 143 9* 	Triple receptacle	30	3	14	SJTW	9 1/4	3 3/4	11 7/8	125	13	9
LG3050 143 9* 	Triple receptacle	50	3	14	SJTW	11 1/2	5	15 1/4	125	13	14
LG3040 123 9* 	Triple receptacle	40	3	12	SJTW	11 1/2	5	15 1/4	125	15	14
LG3075 143 9Q** 	Quad outlet	75	3	14	SJTOW	11 1/2	5	15 1/4	125	10	20
LG3065 123 9Q** 	Quad outlet	65	3	12	SJTOW	11 1/2	5	15 1/4	125	15	24
Light Cord Reels											
LD2040 163 2* 	Fluorescent	40	3	16	SJTW	9 1/4	3 3/4	11 7/8	120	0.3	11
LG3050 163 8* 	Fluorescent	50	3	16	SJTW	11 1/2	5	15 1/4	120	10	13
LG3050 143 10** 	LED	50	3	14	SJTOW	11 1/2	5	15 1/4	125	12	13
For indoor use only. *Models UL listed at 125 Volt 60 HZ single phase. Series LD/LG fluorescent light cord reels are not UL listed for Canada. **Models are ETL listed.											

For indoor use only. \*Models UL listed at 125 Volt 60 HZ single phase. Series LD/LG fluorescent light cord reels are not UL listed for Canada. \*\*Models are ETL listed.

## Cord Options

### Series L 4000 / L 5000 / L 70000

	<b>#1 - Incandescent Light</b> (100 watt max) Single receptacle tool tap; push-through switch, metal grounded guard		<b>#3 - Single Receptacle</b> Single 15 AMP. NEMA 5-15R
	<b>#2 - Fluorescent Light</b> (825 lumens) Durable shock absorbing lamp holder; shatter-resistant tube with switch		<b>#3A - Single Receptacle</b> Single 20 AMP. NEMA 5-20R
	<b>#5 - Incandescent Light</b> (100 watt max) Rubber handle, vinyl-coated cage w/o switch; automatic on/off switch at reel guide arm		<b>#3B - Twist Lock Connector</b> Single 20 AMP with twist lock connector. NEMA L5-20R
	<b>#6 - Fluorescent Light</b> Explosion proof 13 watt fluorescent hand lamp; automatic on/off switch at reel guide arm		<b>#4 - R.V. Plug</b> Male rubber plug used with recreational vehicles (RV's).
	<b>#8 - Fluorescent Light</b> (825 lumens) 120 V, 10 amp receptacle in-line on lamp handle; scratch guard protects lamp cover		<b>#7/7A/7B - Duplex Outlet Box</b> Duplex outlet box with flip-top lid. GFCI protection on #7 and 7A.
	<b>#10 - LED Light</b> (930 lumens) Two 4-watt LEDs; single 3-watt end spot light; in-line tool tap, NEMA 5-15R max 12 amp draw		<b>#9/9G - Triple Tap</b> Molded triple tap. GFCI protection on #9G only.
			<b>X - Flying Lead</b> Bare cord or cable endings and conduit box.

### Series LD / LG

	<b>#2 - Fluorescent Light</b> 13 watt; shatter-resistant tube with switch.
	<b>#8 - Fluorescent Light</b> 13 watt; on/off switch and outlet on the handle.
	<b>#9 - Triple Outlet</b> Triple outlet with grounded receptacles.
	<b>#9Q - Quad Outlet</b> Circuit breaker protected, 4 grounded NEMA5-15 outlets with power indicator light.
	<b>#10 - LED Light</b> 1300 Lumen; grounded 12 amp outlet and on-off switch on handle.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.






## Heavy Duty Power Cord Reels

### Series L 4000 / L 5000 / L 70000

Reelcraft's Series L 4000, L 5000 and L 70000 power cord reels have a heavy gauge all steel frame and a baked-on powder coat finish that produce a rugged, corrosion-resistant product. A heavy duty and robust collector ring assures maximum conductivity current flow. The declutching arbor virtually eliminates the possibility of spring damage due to reverse winding. Only the highest quality spring steel is used and conditioned to insure there are no imperfections offering maximum service life. For indoor, non-weather tight applications only. All models are UL Listed and CSA certified.

L 4050 163 3

Made in USA

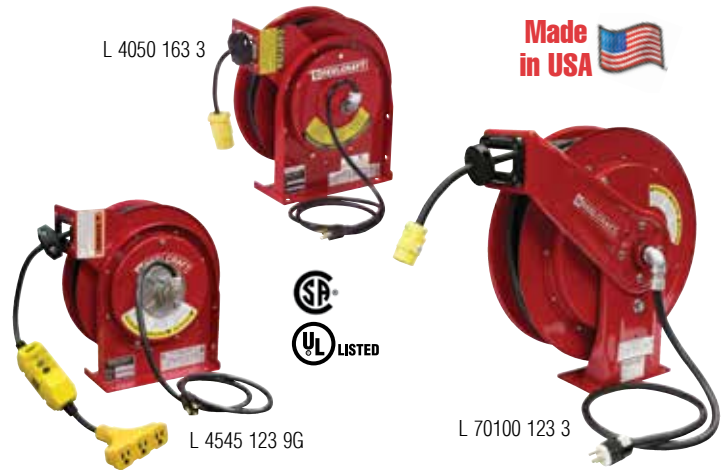

L 4545 123 9G

L 70100 123 3

Model w/ Cord	Accessory	Reel Capabilities				Reel Dimensions (in)			Volts/ Amps	Volts/ Amps	Shpg. Wt (lbs)
		Length (ft)	# Cond	AWG	Type	Length	Width	Height			
L 4035 163 3	Single receptacle	35	3	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	-----	25
L 4050 163 3	Single receptacle	50	3	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	-----	26
L 4545 123 3	Single receptacle	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	27
L 5550 123 3	Single receptacle	50	3	12	SJEOOW	16 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 15	-----	44
L 70075 123 3	Single receptacle	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	70
L 70100 123 3	Single receptacle	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	74
L 4545 123 3A	Single connector	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	28
L 5550 123 3A	Single connector	50	3	12	SJEOOW	16 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 20	-----	44
L 70075 123 3A	Single connector	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	70
L 70100 123 3A	Single connector	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	74
L 4545 123 3B	Twist lock connector	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	28
L 70075 123 3B	Twist lock connector	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	70
L 70100 123 3B	Twist lock connector	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	74
L 4545 123 7	Duplex outlet box w/GFCI (F)	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	29
L 5550 123 7*	Duplex outlet box w/GFCI (F)	50	3	12	SEOOOW	16 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 20	-----	45
L 70075 123 7	Duplex outlet box w/GFCI (F)	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	72
L 70100 123 7	Duplex outlet box w/GFCI (F)	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	76
L 4545 123 7A	Duplex outlet box w/GFCI (F)	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	29
L 70075 123 7A	Duplex outlet box w/GFCI (F)	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	72
L 70100 123 7A	Duplex outlet box w/GFCI (F)	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	76
L 4545 123 7B	Duplex outlet box	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 20	-----	29
L 4050 163 9	Triple tap receptacle	50	3	16	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	-----	26
L 4545 123 9	Triple tap receptacle	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	28
L 70075 123 9	Triple tap receptacle	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	71
L 70100 123 9	Triple tap receptacle	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	75
L 4545 123 9G	Triple tap w/GFCI (F)	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	29
L 70075 123 9G	Triple tap w/GFCI (F)	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	72
L 70100 123 9G	Triple tap w/GFCI (F)	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 15	-----	76
L 4050 163 X	Flying lead	50	3	16	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	220 / 6.5	26
L 4545 123 X	Flying lead	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 20	220 / 10	27
L 5550 123 X	Flying lead	50	3	12	SEOOOW	16 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 20	220 / 10	42
L 5750 103 X	Flying lead	50	3	10	SEOOOW	16 <sup>1</sup> / <sub>2</sub>	12 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 30	220 / 15	55
L 70075 123 X	Flying lead	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	220 / 10	69
L 70100 123 X	Flying lead	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	220 / 10	73
L 70100 124 X	Flying lead	100	4	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	-----	600 / 16	75
L 4000	Reel without cord	50	3	16	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	220 / 6.5	22
L 4500	Reel without cord	45	3	12	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 20	220 / 10	22
L 5500	Reel without cord	50	3	12	SEOOOW	16 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 20	220 / 10	35
L 5700	Reel without cord	50	3	10	SEOOOW	16 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	17 <sup>1</sup> / <sub>2</sub>	125 / 30	220 / 15	37
L 70075	Reel without cord	75	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	220 / 10	58
L 70100	Reel without cord	100	3	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	125 / 20	220 / 10	58
L 70100 124	Reel without cord	100	4	12	SEOOOW	19 <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	20 <sup>1</sup> / <sub>4</sub>	-----	600 / 16	58

**For indoor non-weather tight applications only.** Incandescent bulb 75 watt maximum. \*Inlet plug is NEMA5 - 15P configuration. Plug not set for 20 amps. \*\*Auto switch models. All models UL listed at 125 Volt 60 HZ single phase. All models are CSA certified for Canada.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse Indiana & California Warehouses California Warehouse Canadian Warehouse



## Heavy Duty Light Cord Reels

### Series L 4000 / L 5000

Reelcraft's heavy duty light cord reels offer six different styles of lamps. A robust collector ring increases conductivity current flow. Individually powder coated components offer the maximum protection from corrosion.



L 4050 163 10



Model w/ Cord	Accessory	Reel Capabilities				Reel Dimensions (in)			Volts/ Amps	Shpg. Wt (lbs)
		Length (ft)	# Cond	AWG	Type	Length	Width	Height		
L 4035 163 1	Incandescent	35	3	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 10	23
L 4050 163 1	Incandescent	50	3	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 10	27
L 4035 162 2	Fluorescent	35	2	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 0.3	26
L 4050 162 2	Fluorescent	50	2	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 0.3	26
L 4035 A 163 5**	Rubberized incandescent	35	3	16	SJEOOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 15	28
L 5245 A 163 6X**	Explosion-proof fluorescent	45	3	16	SEOOW	13 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>1</sup> / <sub>2</sub>	125 / 0.13	39
L 4035 163 8	Fluorescent light and outlet	35	3	16	SJTO	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	25
L 4050 163 8	Fluorescent light and outlet	50	3	16	SJTO	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	27
L 4035 163 10	LED	35	3	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	26
L 4050 163 10	LED	50	3	16	SJTOW	12 <sup>5</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>8</sub>	13 <sup>1</sup> / <sub>4</sub>	125 / 13	28

For indoor non-weather tight applications only. Incandescent bulb 75 watt maximum. \*Inlet plug is NEMA5 - 15P configuration. Plug not set for 20 amps. \*\*Auto switch models. All models UL listed at 125 Volt 60 HZ single phase. All models are CSA certified for Canada.

## NEMA 4 Power Cord Reels

### Series L NM400

Reelcraft's new NEMA 4 rated power cord reels are designed for protection against water or dust, indoor and outdoor. The heavy duty cast aluminum design and powder coat finish combine to produce a rugged, corrosion-resistant product.

NEW!



L NM440 103 X



Model w/ Cord	Accessory	Reel Capabilities				Reel Dimensions (in)			Volts	Amps	Shpg. Wt (lbs)
		Length (ft)	# Cond	AWG	Type	Length	Width	Height			
L NM450 163 X	Flying Lead	50	3	16	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	9	43
L NM450 143 X	Flying Lead	50	3	14	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	13	48
L NM445 144 X	Flying Lead	45	4	14	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	11	50
L NM425 123 X	Flying Lead	25	3	12	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	18	44
L NM450 123 X	Flying Lead	50	3	12	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	18	50
L NM440 124 X	Flying Lead	40	4	12	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	14	50
L NM440 103 X	Flying Lead	40	3	10	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	22	50
L NM430 104 X	Flying Lead	30	4	10	SOW	13 <sup>1</sup> / <sub>2</sub>	9 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	600	16	50

All models UL listed at 125 Volt 60 HZ single phase. All models are CSA certified for Canada.

## Heavy Duty Stainless Steel Cord Reels

### Series LS 5000

Reelcraft's new stainless steel power cord reels are designed for applications where corrosion or sanitation are a concern. The heavy gauge 304L stainless steel provides an easy to clean finish and superior corrosion resistance.



LS 5445 123 3



Model w/ Cord	Accessory	Reel Capabilities				Reel Dimensions (in)			Volts	Amps	Shpg. Wt (lbs)
		Length (ft)	# Cond	AWG	Type	Length	Width	Height			
LS 5445 123 3	Single Receptacle	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	15	31
LS 5445 123 3A	Single Receptacle	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	20	32
LS 5445 123 3M-WC	Single Medical Grade Receptacle	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	15	32
LS 5445 123 3M	Single Medical Grade Receptacle	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	15	31
LS 5445 123 7	Duplex Outlet Box w/GFCI(F)	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	15	33
LS 5445 123 9	Triple Tap	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	15	32
LS 5400	Bare Reel	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	20	24
LS 5445 12 X	Flying Lead	45	3	12	SJEOOW	14 <sup>1</sup> / <sub>4</sub>	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	125	20	29

All models UL listed at 125 Volt 60 HZ single phase. All models are CSA certified for Canada.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

🏠 Indiana Warehouse

🏠 Indiana & California Warehouses

🏠 California Warehouse

🏠 Canadian Warehouse






## Tool Balancers

### Series TB / TBL

Tool balancers make tools nearly weightless, reducing operator fatigue. Reelcraft's tool balancers also improve safety and ergonomics and helps prevent tools from being accidentally dropped, reducing tool damage.

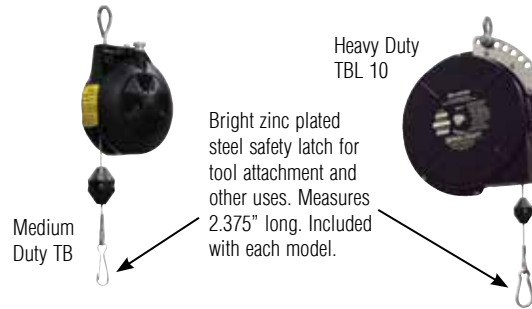

Model	Min-Max Load (lbs)	Cable Lgth. (ft)	Ratchet Lock	Weight (lbs)
TB 10	5 - 10	8	NO	9
TB 12	8 - 12	8	NO	10
TB 15	10 - 15	8	NO	10
TB 23	16 - 23	8	NO	10
TBL 10	5 - 10	8	YES	9
TBL 12	8 - 12	8	YES	10
TBL 15	10 - 15	8	YES	10
TBL 23	16 - 23	8	YES	10

Model	Min-Max Load (lbs)	Cable Lgth. (ft)	Ratchet Lock	Weight (lbs)
TB 01	0 - 1.5	6	NO	1
TB 03	1.5 - 3	6	NO	1
TB 05	3 - 5	6	NO	1.5

## Heavy Duty Large Frame Reels

### Series 2400 / 3900 / 3700 / 5900

Reelcraft's large frame reels are rugged and durable, with standard 1/2" pitch chain and sprocket drive powered by AC or DC electric motor with auxillary bevel crank. The reels are equipped with the standard welded frame and heavy duty cast bevel gears for reliable performance. Designs are versatile to provide flexibility to meet user requirements for size, capacity, rewind motor and consistency.

Model w/o Hose	Hose I.D. (in.)	Hose Length (ft.)	Max PSI	Reel Dimensions (in.)			Shpg. Wt. (lbs)
				Length	Width	Height	
EP2405-23-18-10FF	1	155	3000	23	31	24 1/2	78
EP2405-23-24-10FF	1	210	3000	23	37	24 1/2	84
EP2405-31-8-10FF	1	155	3000	31	21	32 1/2	74
EP3905-23-12-15FF	1 1/2	50	600	23	25	24 1/2	87
EP3905-23-18-15FF	1 1/2	85	600	23	31	24 1/2	93
EP3905-25-12-15FF	1 1/2	50	600	25	25	26 1/2	89
EP3705-25-20-20VF	2	55	300	25	33	26 1/2	124
EP3705-31-12-20VF	2	55	300	31	25	32 1/2	134
EP5905-31-24-30VF	3	30	300	31	37	32 1/2	150
EP5905-39-16-30VF	3	45	300	39	29	40 1/2	200

Also available, non-explosion proof 12 or 24 DC, explosion proof 115 AC, 24 DC. Large frame reels are configurable to your needs - consult Reelcraft for details.

Series 5900  
Shown with optional bevel crank



□□3900-31-12-15FF

#### Drive Type:

EP - Electric motor, 12 V DC explosion proof  
BC Bevel crank (standard)

## Custom Built Reels

### Engineered Products Group

Reelcraft's engineered products group custom builds reels to your specifications. Our special engineered products are developed for demanding applications in areas such as aviation, fire, marine, military, hydroseeding, sewer and well cleaning, offshore oil rigs, robotic cable and much more. We offer flexibility, competitive pricing and a lasting commitment to excellence. For more than 25 years, Reelcraft's engineered products group has produced custom products to meet individualized requirements.

Made in USA



Custom Reels  
Built to your specs



## Reelcraft's Capabilities

- Very few size and weight constraints
- Special finishes/paint options
- Various drive types
- Wide range of pressures
- Unique options
- No minimum quantities



Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Prop 65: **WARNING:**

Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Customer Service: 1.855.634.9109

All Other Calls: 1.800.444.3134

**REELCRAFT**

## **North America and Corporate Headquarters**

2842 E. Business Hwy 30

Columbia City, IN 46725

**Customer Service:** 855-634-9109

Ph: 800-444-3134 • Fax: 800-444-4587

Ph: 260-248-8188 • Fax: 260-248-2605

reelcraft@reelcraft.com

**www.reelcraft.com**

## **Latin America and the Middle East**

Thompson International, Inc.

P.O. Box 12958, Ft. Wayne, IN 46866

Ph: 260-489-1685 • Fax: 260-489-0203

info@t-i-i.com

**www.reelcraft.com/latinamerica**

## **Pacific Rim**

P.O. Box 218202

Barrigada, Guam USA 96921

Ph: +1 (671) 971-4652

Da Nang City, Vietnam

Ph: +84 77 942-2433

rap.reels@gmail.com

**www.reelcraft.com/asia**

## **Europe**

Unit 17 • Cronin Courtyard

Weldon South Industrial Estate

Corby • Northamptonshire NN18 8AG

United Kingdom

Ph: +44 (0) 1536 406999

Fax: +44 (0) 1536 406777

europe@reelcraft.com

**www.reelcraft.com/europe**

## **China**

Reelcraft Changzhou Co., Ltd.

Building C, No. 229 HeHai West Rd.

Changzhou, Jiangsu, China 213022

Ph: +86 (519) 8512 2391 ext. 8002

Fax: +86 (519) 8512 9309

rco@reelcraftchina.com

**www.reelcraftchina.com**

## **Australia**

PO Box 6463 BC, Blacktown

NSW 2148, Australia

Ph: +61 (2) 9621 8988

Fax: +61 (2) 9621 7688

sales@recoila.com

**www.reelcraft.com**