



## Pulse Tool Systems



**REAL TOOLS FOR REAL WORK.™**

# Because every assembly is critical

There's much more to an assembly application than merely putting wrench to bolt. It's an intricate matter of linking tool users and fasteners to deliver an uncompromised combination of ergonomics, speed, and accuracy.

## The solution: Ingersoll Rand Pulse Systems.

At Ingersoll Rand, we have extensive experience with threaded fastening processes. For over 100 years, we've worked with many of the world's leading manufacturers in various industries, and we understand the interface of the tool and operator. We know how to leverage the power of ergonomically designed equipment to maximize productivity and inspire progress.

### Durability

- High-speed, reactionless fastening with a power-to-weight ratios similar to impact tools

### Comfort

- Enhanced ergonomics for operator providing comfortable grip, low vibration and noise, and reactionless one handed operation

### Reliability

- Consistent torque with fully customizable operator feedback, process control, and data output options
- Proven performance in high and low torque models

### Speed

- Non-Shut Off: 5,500 - 7,000 RPM
- Shut Off: 5,000 - 10,000 RPM



# Standard Pulse Tools

## Q Series

Ingersoll Rand offers a full line of standard shutoff and non-shutoff pulse tools in pistol, angle, and in-line configurations to meet your needs. These extremely lightweight tools offer excellent power, speed, accuracy, and ergonomics.

The Q-Series is the latest generation of pulse tools engineered with the end-user in mind — making them the tools of choice for operators looking for the best combination of speed, ergonomics, and accuracy.



# Shut off Pulse Tools

## Features

- Torque range: 3 - 155 ft lbs ( 4.5 - 210 NM)
- Speeds: 4,000 - 7,000 rpm
- Easy torque adjustment for quick setup
- Auto-shut off feature stops airflow to tool when cycle is complete
- High-speed, compact, lightweight design
- Ergonomic design provides comfortable grip, low vibration and noise and reactionless one-handed operation
- Auto-shut off limits air consumption and tool wear
- Deters early throttle release; recommended when improved error-proofing is desired



Model	Fastener Size	ft-lbs (Nm)	1 min. rpm	lbs (kg)	in (mm)	in (mm)	in	cfm
<b>PISTOL</b>								
QS50P3	M5	3 - 6 (4.5 - 8)	4300	2.1 (0.95)	6.5 (164)	0.9 (23)	3/8" <input type="checkbox"/>	8.9
QS50PQ1	M5	3 - 6 (4.5 - 8)	4300	2.1 (0.95)	6.5 (164)	0.9 (23)	1/4" <input checked="" type="checkbox"/>	8.9
QS60P3	M6	5.1 - 11.4 (7 - 15.5)	5300	2.4 (1.1)	6.5 (164)	0.9 (23)	3/8" <input type="checkbox"/>	12
QS60PQ1	M6	4.4 - 9.6 (6 - 13)	5300	2.1 (1)	6.5 (164)	0.9 (23)	1/4" <input checked="" type="checkbox"/>	12
QS70P3	M6 - M8	11.1 - 23.6 (15 - 32)	6800	2.4 (1.1)	7 (177)	0.9 (23)	3/8" <input type="checkbox"/>	13
QS70PQ1	M6 - M8	9.6 - 20.7 (13 - 28)	6800	2.4 (11)	7 (177)	0.9 (23)	1/4" <input checked="" type="checkbox"/>	13
QS80P3	M8	22.1 - 40.6 (30 - 55)	6800	2.4 (1.1)	7.4 (187)	1 (25)	3/8" <input type="checkbox"/>	16
QS110P4	M10 - M12	37 - 64 (50 - 85)	5800	3.3 (1.51)	7.6 (194)	2.2 (57)	1/2" <input type="checkbox"/>	17.7
QS120P4	M12	52 - 85 (70 - 115)	5400	3.9 (1.8)	7.9 (201)	2.4 (62)	1/2" <input type="checkbox"/>	18.4
QS140P4	M14	81 - 110 (110 - 150)	5200	4.6 (2.1)	8.4 (214)	2.6 (65)	1/2" <input type="checkbox"/>	25
QS150P6	M16	103 - 155 (140 - 210)	4400	6.5 (3)	9.3 (237)	1.5 (39)	3/4" <input type="checkbox"/>	25

Model			
QS50 - QS80	70 - 78 dba	1/4" NPT	3/8" (10 mm)
QS110 - QS150	80 - 86 dba	1/4" NPT	3/8" (10 mm)

# Non-Shut off Pulse Tools

## Features

- Torque range: 6 - 258 ft-lbs (7.5 - 350 NM)
- Speeds: 4,000 - 9,300 rpm
- Easy torque adjustment for quick setup
- Extremely lightweight, compact, and fast
- World-class power-to-weight ratio
- Ergonomic design provides comfortable grip, low vibration and noise, and reactionless one-handed operation
- Environmentally enhanced lube-free, dual-chamber air motor, and self-lubricating blades and cylinder reduce oil mist
- Non-shut-off tools are recommended for the majority of applications where speed and ergonomics are important



Model	Fastener Size	ft-lbs (Nm)	1 min. rpm	lbs (kg)	in (mm)	in (mm)	in	cmf
<b>PISTOL</b>								
100PQ1	M4 - M5	5.5 - 8 (7.5 - 11)	9300	1.6 (0.7)	5.6 (142)	0.7 (18)	1/4"	12
Q60P3	M6	10 - 16 (13 - 22)	4000	1.8 (0.8)	5.1 (130)	0.9 (22)	3/8"	11
Q60PQ1	M6	8 - 15 (11 - 20)	4000	1.8 (0.8)	5.1 (130)	0.9 (22)	1/4"	11
Q70P3	M6 - M8	18 - 25 (24 - 35)	7000	1.8 (0.8)	5.2 (131)	0.9 (22)	3/8"	11
Q70PQ1	M6 - M8	15 - 20 (20 - 28)	7000	1.8 (0.8)	5.2 (131)	0.9 (22)	1/4"	12
Q80PQ1	M8	18 - 25 (24 - 35)	7000	1.9 (0.9)	5.4 (138)	0.9 (22)	1/4"	12
Q80P3	M8	24 - 37 (34 - 50)	7000	1.9 (0.9)	5.4 (138)	0.9 (22)	3/8"	12
Q90P3	M8 - M10	35 - 48 (47 - 65)	6500	2.1 (1.0)	5.8 (148)	0.9 (23)	3/8"	14
Q110P4	M10 - M12	44 - 70 (60 - 95)	5500	3.0 (1.4)	6.5 (164)	1.1 (27)	1/2"	20
Q120P4	M12	70 - 95 (95 - 130)	6600	3.7 (1.7)	6.9 (175)	1.3 (29)	1/2"	20
Q140P4	M14	95 - 118 (130 - 160)	5400	4.9 (2.2)	7.5 (190)	1.3 (33)	1/2"	30
140P6	M16	118 - 199 (160 - 270)	3200	6.8 (3.1)	8.9 (226)	1.4 (36)	3/4"	26
3000P	M16 - M18	170 - 258 (230 - 350)	4700	10.1 (4.6)	9.7 (246)	1.6 (40)	3/4"	10
<b>INLINE</b>								
180SQ1	M4 - M6	11 - 18 (15 - 24)	9000	20 (0.9)	8.7 (221)	0.9 (22)	1/4"	9
280SQ1	M6 - M8	15 - 23 (20 - 31)	8000	21 (10)	9.0 (229)	0.9 (22)	1/4"	11
380SQ1	M8	21 - 30 (29 - 40)	8500	26 (1.2)	9.1 (231)	1.0 (25)	1/4"	11
<b>ANGLE</b>								
500A	M6 - M8	21 - 29 (29 - 39)	7000	3.3 (1.5)	10.5 (267)	1.1 (27)	3/8"	11


Model			
Q60 - Q80	71 - 75 dBa	1/4" NPT	3/8" (10 mm)
Q790P - Q140	78 - 83 dBa	1/4" NPT	3/8" (10 mm)
100 - 3000	76 - 83 dBa	1/4" NPT	3/8" (10 mm)

# Transducerized Pulse Tools

Ingersoll Rand combines the power, speed and ergonomics of the pulse tool with the sophistication of a torque transducer and microprocessor to create a more powerful, convenient and accurate fastening system. The closed-loop system offers all the advantages of a pulse tool, while providing advanced torque control and data output typically found in a DC fastening system. The new angle encoded series includes the ability to monitor the fastening angle during the tightening process.

- Strain gauge on output shaft and close to the socket for more accurate measurement of torque.
- Non-contacting pick-up reduces signal noise, improving torque repeatability.
- Angle monitoring available
- Torque readout.
- End-of-run data.
- Operator visual and audible notification.
- I/O signals for line control.
- Simple programming for fast and easy set-up.

The new QXP Series pulse tools offer a new level of speed, convenience, accessibility, and comfort to the assembly process.

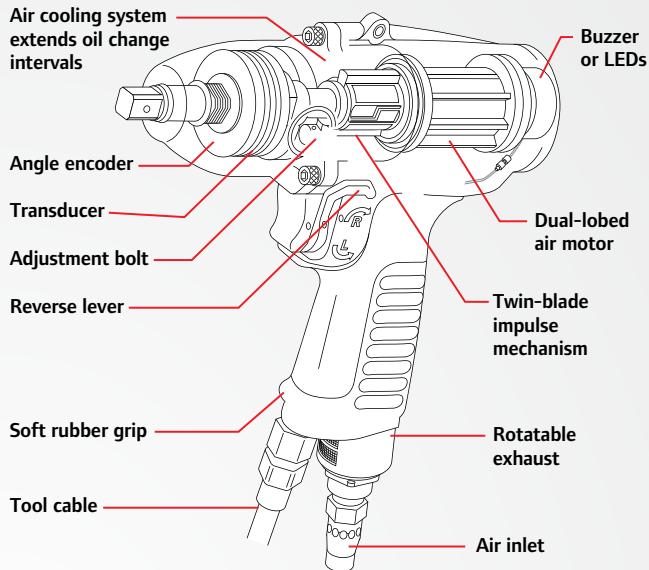

Model	Icon: Nut	Icon: Box	Icon: Circle with 1 min.	Icon: Bottle	Icon: Drill	Icon: Nut	Icon: Nut	Icon: cmf
<b>PISTOL</b>								
QXP60P6	M6	7.4 – 14.5 (10 – 19.5)	6,000	2.8 (1.26)	7.0 (179)	0.8 (21)	3/8"	9.5
QXP60Q4	M6	6.3 – 11.8 (8 – 16)	6,000	2.8 (1.26)	7.0 (179)	0.8 (21)	1/4"	9.5
QXP70P6	M6 – M8	13 – 24 (18 – 33)	7,000	2.8 (1.26)	7.0 (179)	0.8 (21)	3/8"	11.3
QXP70Q4	M6 – M8	11 – 20 (15 – 27)	7,000	2.8 (1.26)	7.0 (179)	0.8 (21)	1/4"	11.3
QXP80P6	M8	17 – 33 (24 – 46)	7,000	3 (1.3)	7.3 (186)	0.8 (21)	3/8"	11.3
QXP90P6	M8 – M10	26 – 44 (35 – 60)	6,500	3.3 (1.5)	7.7 (195)	0.9 (23)	3/8"	14.5
QXP110P8	M10 – M12	35 – 70 (48 – 95)	5,500	4.1 (1.86)	8.2 (209)	1.0 (25.6)	1/2"	18.7
QXP120P8	M12	48 – 92 (65 – 125)	5,900	5.4 (2.46)	8.8 (223)	1.1 (29.0)	1/2"	21.2
QXP140P8	M14	55 – 114 (75 – 155)	5,200	6.3 (2.86)	9.3 (235)	1.1 (29.0)	1/2"	27.7
QXP150P8	M16	81 – 162 (110 – 220)	4,200	7.5 (3.41)	9.6 (241)	1.3 (32.5)	1/2"	27.9

Model	Icon: Headphones	Icon: Box	Icon: Nut
QXP60 – QXP150	75 – 87 dba	1/4" NPT	3/8" (10 mm)

# Pulse Systems

We offer a robust portfolio of pulse tools that deliver consistent performance and accuracy. Select the best solution for your application.

Pulse Systems			
FEATURES	Standard Pulse Tools		Transducerized Pulse Tools
	Non shut-off	Shut-off	
<b>Fastening Strategies</b>			✓
<b>Angle Monitoring</b>			✓
<b>Torque Traceability</b>			✓
<b>Closed-Loop Torque Control</b>			✓
<b>Visible OK / Not OK Signaling</b>			✓
<b>Process Control</b>			✓
<b>Batch &amp; Cycle Counting</b>			✓
<b>Operator Error Proofing</b>		✓	✓
<b>Lube Free Air Motors</b>	✓	✓	✓
<b>Easy Torque Adjustment</b>	✓	✓	✓
<b>High Speed, Compact, Lightweight</b>	✓	✓	✓
<b>Reactionless One-Handed Operation</b>	✓	✓	✓

# Accessories

## Impact Sockets - 6 pt Hex

Type	No. of Models	Output Range in (mm)
<b>IMPACT SOCKETS - INDIVIDUALS</b>		
3/8"	Standard	20
	Deep	18
	Universal	36
1/2"	Standard	32
	Deep	18
	Universal	36
3/4"	Standard	33
	Deep	33
	Universal	29

We offer many additional sizes in sockets. Visit [www.ingersollrandproducts.com](http://www.ingersollrandproducts.com) for a complete offering.



Impact Sockets



Spring Balancer

## Spring Balancers

Model	No. of Models	SWL lb (kg)	ft (m)	lb (kg)
<b>BALANCERS (SEE LITERATURE LISTED BELOW FOR DETAILS)</b>				
BHR Series*	3	0.875 – 5.5 (0.39 – 2.5)	4.25 (1.3)	2.6 – 2.9 (1.2 – 1.3)
BLD Series	4	0.9 – 6.6 (0.4 – 3.0)	5.2 (1.6)	1.3 – 1.5 (0.6 – 0.7)
BMD Series	13	2.2 – 22 (1 – 10)	6.5 – 8.2 (2 – 2.5)	4.4 – 8.8 (2 – 4)

\*A hose reel balancer with 1/4" NPT input/output and 18.4 cfm flow capacity.



Ingersoll Rand (NYSE:IR) advances the quality of life by creating and sustaining safe, comfortable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane® —work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; secure homes and commercial properties; and increase industrial productivity and efficiency. Ingersoll Rand products range from complete compressed air systems, tools and material and fluid handling systems. The diverse and innovative products, services and solutions enhance our customers' energy efficiency, productivity and operations. Ingersoll Rand is a \$12 billion global business committed to a world of sustainable progress and enduring results. For more information, visit [ingersollrand.com](http://ingersollrand.com) or [ingersollrandproducts.com](http://ingersollrandproducts.com).



[www.ingersollrandproducts.com](http://www.ingersollrandproducts.com)

Distributed by:



[sales@alcornindustrial.com](mailto:sales@alcornindustrial.com)  
[www.alcornindustrial.com](http://www.alcornindustrial.com)  
(800) 317-4775

Ingersoll Rand, IR and the IR logo are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation.